



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

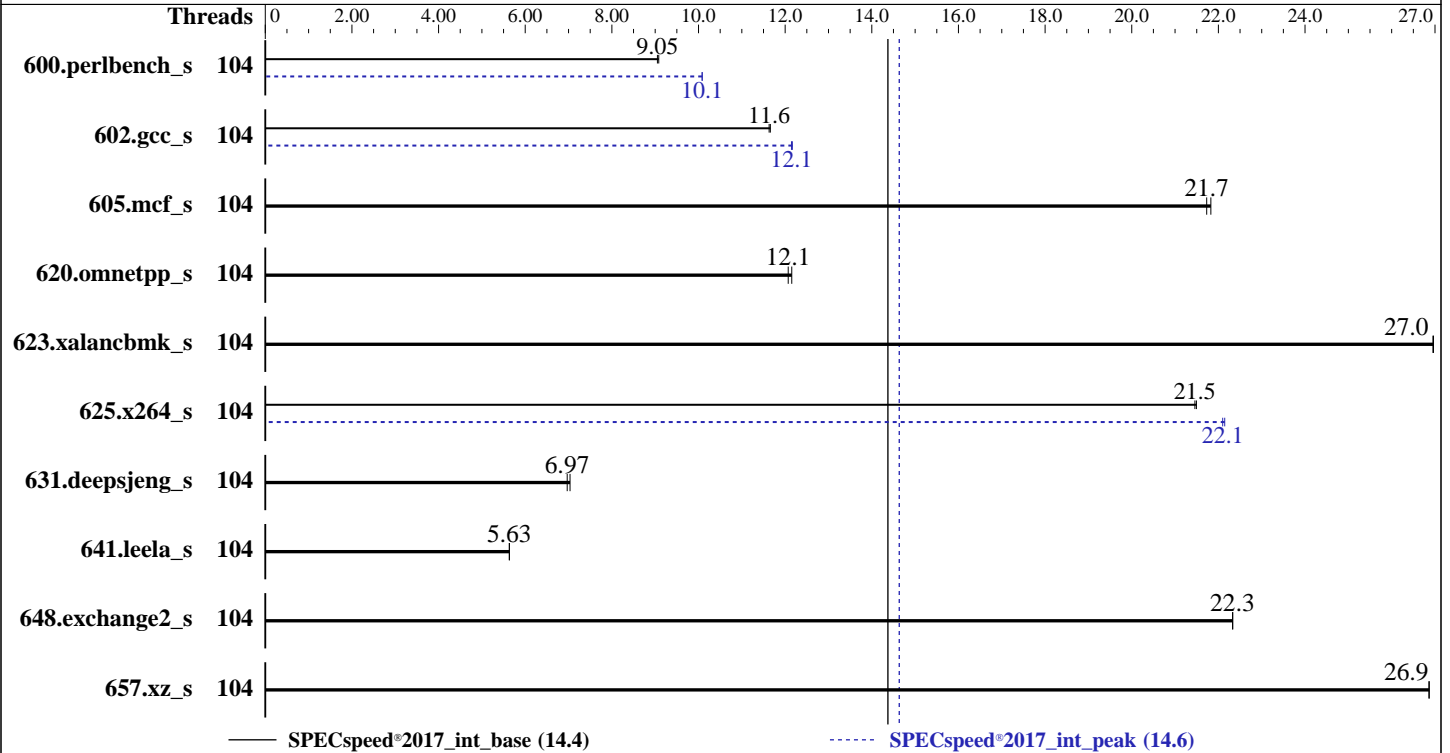

Hardware

CPU Name: Intel Xeon Platinum 8470
 Max MHz: 3800
 Nominal: 2000
 Enabled: 104 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa)
 4.18.0-372.9.1.el8.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 0.3.1 released Nov-2022
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	104	196	9.05	195	9.08			104	176	10.1	176	10.1		
602.gcc_s	104	342	11.7	342	11.6			104	327	12.2	328	12.1		
605.mcf_s	104	217	21.7	216	21.8			104	217	21.7	216	21.8		
620.omnetpp_s	104	134	12.2	135	12.1			104	134	12.2	135	12.1		
623.xalancbmk_s	104	52.5	27.0	52.6	27.0			104	52.5	27.0	52.6	27.0		
625.x264_s	104	82.2	21.5	82.1	21.5			104	79.8	22.1	79.7	22.1		
631.deepsjeng_s	104	206	6.97	204	7.03			104	206	6.97	204	7.03		
641.leela_s	104	303	5.63	303	5.63			104	303	5.63	303	5.63		
648.exchange2_s	104	132	22.3	132	22.3			104	132	22.3	132	22.3		
657.xz_s	104	230	26.9	230	26.9			104	230	26.9	230	26.9		

SPECspeed®2017_int_base = **14.4**

SPECspeed®2017_int_peak = **14.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

General Notes (Continued)

Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```

  ADDDC Setting : Disabled
  DIMM Self Healing on
  Uncorrectable Memory Error : Disabled
  Virtualization Technology : Disabled
  Logical Processor : Disabled
  Sub NUMA Cluster : 2-way Clustering
  Optimizer Mode : Enabled

  System Profile : Custom
  CPU Power Management : Maximum Performance
  C1E : Disabled
  C States : Autonomous
  Memory Patrol Scrub : Disabled
  Energy Efficiency Policy : Performance
  PCI ASPM L1 Link
  Power Management : Disabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Sun Jan 15 23:52:11 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-58.el8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Platform Notes (Continued)

- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
Linux localhost.localdomain 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86_64 x86_64
x86_64 GNU/Linux
-----
```

```
-----
2. w
23:52:11 up 27 min,  1 user,  load average: 0.66, 0.25, 0.31
USER  TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
donald  :1      :1               23:50   ?xdm? 15.55s 0.00s /usr/libexec/gdm-x-session
--register-session --run-script gnome-session
-----
```

```
-----
3. Username
From environment variable $USER:  root
From the command 'logname':      donald
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size               (blocks, -f) unlimited
pending signals        (-i) 4125042
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125042
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 17
/usr/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo su
su
bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-norun-main.sh speed
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

```

/bin/bash ./dell-norun-main.sh speed
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=104 --tune base,peak -o all --define
  intspeedaffinity --define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=104 --tune base,peak --output_format all
  --define intspeedaffinity --define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode speed --tune base:peak --size refspeed intspeed
  --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/temlogs/preenv.intspeed.001.0.log --lognum 001.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

```

```

-----
6. /proc/cpuinfo
  model name      : Intel(R) Xeon(R) Platinum 8470
  vendor_id      : GenuineIntel
  cpu family     : 6
  model         : 143
  stepping      : 8
  microcode     : 0x2b000111
  bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
  cpu cores     : 52
  siblings      : 52
  2 physical ids (chips)
  104 processors (hardware threads)
  physical id 0: core ids 0-51
  physical id 1: core ids 0-51
  physical id 0: apicids
  0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
  ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102
  physical id 1: apicids
  128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
  80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.32.1:
Architecture:      x86_64
CPU op-mode(s):   32-bit, 64-bit
Byte Order:       Little Endian
CPU(s):           104
On-line CPU(s) list: 0-103
Thread(s) per core: 1
Core(s) per socket: 52
Socket(s):        2
NUMA node(s):    4
Vendor ID:       GenuineIntel
BIOS Vendor ID:  Intel
CPU family:      6
Model:           143
Model name:      Intel(R) Xeon(R) Platinum 8470

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

```

BIOS Model name: Intel(R) Xeon(R) Platinum 8470
Stepping: 8
CPU MHz: 2000.000
BogoMIPS: 4000.00
L1d cache: 48K
L1i cache: 32K
L2 cache: 2048K
L3 cache: 107520K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100
NUMA node1 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf
tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100
node 0 size: 257238 MB
node 0 free: 253808 MB
node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102
node 1 size: 258000 MB
node 1 free: 255032 MB
node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101
node 2 size: 258042 MB
node 2 free: 255886 MB
node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103
node 3 size: 258039 MB
node 3 free: 256170 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056071728 kB

10. who -r

run-level 5 Jan 15 23:27

11. Systemd service manager version: systemd 239 (239-58.el8)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
atd auditd avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm getty@
import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned libstoragemgmt
libvirtfd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd syslog timedatex tuned udisks2 vdo vgauthd vmtoolsd
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
debug-shell dnsmasq ebttables gssproxy hwloc-dump-hwdata initial-setup
initial-setup-reconfiguration iprdump iprinit iprupdate iscsid iscsiui kpatch kvm_stat ledmon
libvirt-guests man-db-restart-cache-update ndctl-monitor netcf-transaction nfs-blkmap nfs-convert
nfs-server nftables numad nvme-autoconnect oddjobd podman podman-auto-update podman-restart
psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ speech-dispatcherd
sshd-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcshd upower virtinterfaced
virtnetworkd virtnodevd virtnwfilterd virtproxyd virtqemud virtsecretfd virtstoraged
wpa_supplicant
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd
virtlogd
masked systemd-timedated

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-372.9.1.el8.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=auto
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

14. cpupower frequency-info

```

analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

```

kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 0
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```

vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     10
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 8.6 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release Red Hat Enterprise Linux release 8.6 (Ootpa)

```

```

-----
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit      Not affected
lltf               Not affected
mds                Not affected
meltdown           Not affected
spec_store_bypass  Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1         Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2         Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds              Not affected
tsx_async_abort    Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

```

```

-----
21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 125G  3.7G 122G   3% /mnt/ramdisk

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge C6620
Product Family: PowerEdge

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

Serial: SL6C201

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

15x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 0.3.1
BIOS Date: 11/24/2022
BIOS Revision: 0.3

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge C6620 (Intel Xeon Platinum 8470)

SPECspeed®2017_int_peak = 14.6

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Peak Optimization Flags (Continued)

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-15 23:52:11-0500.

Report generated on 2024-01-29 17:21:37 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-01.