



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

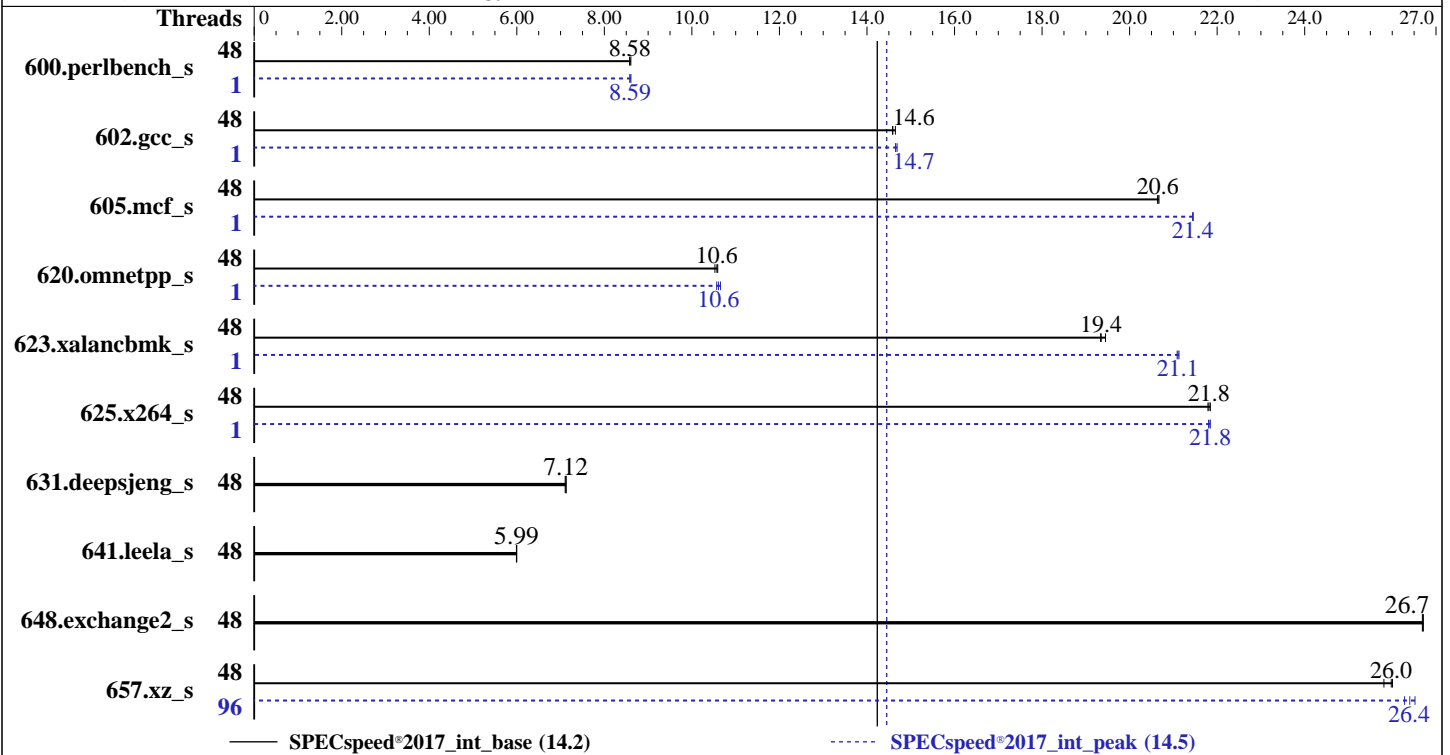

### Hardware

CPU Name: AMD EPYC 9454P  
 Max MHz: 3800  
 Nominal: 2750  
 Enabled: 48 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 6 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version KAE109A 1.40 released Jan-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2023  
**Software Availability:** Nov-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	206	8.61	207	8.58	<b>207</b>	<b>8.58</b>	1	207	8.58	206	8.61	<b>207</b>	<b>8.59</b>
602.gcc_s	48	272	14.6	<b>273</b>	<b>14.6</b>	273	14.6	1	<b>272</b>	<b>14.7</b>	271	14.7	272	14.7
605.mcf_s	48	228	20.7	<b>229</b>	<b>20.6</b>	229	20.6	1	220	21.4	220	21.5	<b>220</b>	<b>21.4</b>
620.omnetpp_s	48	154	10.6	155	10.5	<b>154</b>	<b>10.6</b>	1	153	10.7	154	10.6	<b>154</b>	<b>10.6</b>
623.xalancbmk_s	48	72.9	19.4	<b>73.2</b>	<b>19.4</b>	73.3	19.3	1	67.2	21.1	<b>67.1</b>	<b>21.1</b>	67.1	21.1
625.x264_s	48	81.0	21.8	80.7	21.8	<b>80.9</b>	<b>21.8</b>	1	80.9	21.8	80.8	21.8	<b>80.8</b>	<b>21.8</b>
631.deepsjeng_s	48	<b>201</b>	<b>7.12</b>	202	7.11	201	7.13	48	<b>201</b>	<b>7.12</b>	202	7.11	201	7.13
641.leela_s	48	<b>285</b>	<b>5.99</b>	285	5.99	284	6.00	48	<b>285</b>	<b>5.99</b>	285	5.99	284	6.00
648.exchange2_s	48	<b>110</b>	<b>26.7</b>	110	26.7	110	26.7	48	<b>110</b>	<b>26.7</b>	110	26.7	110	26.7
657.xz_s	48	238	26.0	<b>238</b>	<b>26.0</b>	240	25.8	96	233	26.5	<b>234</b>	<b>26.4</b>	235	26.3

SPECspeed®2017\_int\_base = **14.2**

SPECspeed®2017\_int\_peak = **14.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.2

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-95"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.9-amd-aocc400-genoa-B1e/amd\_speed\_aocc400\_genoa\_B\_lib  
/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "96"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalanbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-95"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "8"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Nov-2022

### General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
 Operating Mode set to Maximum Performance and then set it to Custom Mode  
 NUMA Nodes per Socket set to NPS4

```

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-genoa-Ble/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Feb 17 22:16:52 2023

```

SUT (System Under Test) info as seen by some common utilities.

-----  
 Table of contents  
 -----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent\_hugepage
  17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

1. `uname -a`

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

2. `w`

```
22:16:52 up 21:31, 1 user, load average: 0.97, 3.84, 2.95
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root     ttyl      -              00:45      21:29m    1.11s    0.07s    /bin/bash ./amd_speed_aocc400_genoa_B1.sh
```

3. Username

From environment variable \$USER: root

4. `ulimit -a`

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 1546703
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 1546703
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

5. `sysinfo process ancestry`

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc400_genoa_B1.py
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.2

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_peak = 14.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```
$SPEC/tmp/CPU2017.017/templogs/preenv.intspeed.017.0.log --lognum 017.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-genoa-Ble
```

```
-----
6. /proc/cpuinfo
  model name      : AMD EPYC 9454P 48-Core Processor
  vendor_id       : AuthenticAMD
  cpu family      : 25
  model           : 17
  stepping        : 1
  microcode       : 0xa101111
  bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
  TLB size        : 3584 4K pages
  cpu cores       : 48
  siblings        : 96
  1 physical ids (chips)
  96 processors (hardware threads)
  physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
  physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            96
On-line CPU(s) list: 0-95
Vendor ID:          AuthenticAMD
Model name:        AMD EPYC 9454P 48-Core Processor
CPU family:        25
Model:             17
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s):         1
Stepping:          1
Frequency boost:   enabled
CPU max MHz:       3810.7910
CPU min MHz:       1500.0000
BogoMIPS:          5491.48
```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.2

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

```

constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

```

```

Virtualization: AMD-V
L1d cache: 1.5 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-11,48-59
NUMA node1 CPU(s): 12-23,60-71
NUMA node2 CPU(s): 24-35,72-83
NUMA node3 CPU(s): 36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 4 nodes (0-3)  
node 0 cpus: 0-11,48-59

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

node 0 size: 96515 MB
node 0 free: 95925 MB
node 1 cpus: 12-23,60-71
node 1 size: 96727 MB
node 1 free: 96042 MB
node 2 cpus: 24-35,72-83
node 2 size: 96761 MB
node 2 free: 96478 MB
node 3 cpus: 36-47,84-95
node 3 size: 96694 MB
node 3 free: 96436 MB
node distances:
node  0  1  2  3
  0:  10 12 12 12
  1:  12 10 12 12
  2:  12 12 10 12
  3:  12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:          395980672 kB

```

```

-----
10. who -r
    run-level 3 Feb 17 00:45

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc
rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
indirect         wickedd

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.2

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=3bbe645f-e8ac-484d-b283-98c451feb714
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.75 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

16. /sys/kernel/mm/transparent\_hugepage

```
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs    60000
   defrag                    1
   max_ptes_none            511
   max_ptes_shared          256
   max_ptes_swap            64
   pages_to_scan            4096
   scan_sleep_millisecs     10000

```

```

-----
18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
   SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-genoa-Ble
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sda3       xfs   446G  54G  393G  12% /

```

```

-----
20. /sys/devices/virtual/dmi/id
   Vendor:          Lenovo
   Product:         ThinkSystem SR635V3
   Product Family: ThinkSystem
   Serial:          1234567890

```

```

-----
21. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     3x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800
     8x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
     1x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

```

```

-----
22. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      Lenovo
   BIOS Version:     KAE109A-1.40
   BIOS Date:        01/17/2023

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2023  
**Hardware Availability:** Apr-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

BIOS Revision: 1.40  
Firmware Revision: 1.40

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak) 657.xz\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
=====

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.2

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang  
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.2

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.75 GHz,AMD EPYC 9454P)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Apr-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-R.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-R.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-17 09:16:52-0500.

Report generated on 2023-03-15 10:20:51 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-14.