



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

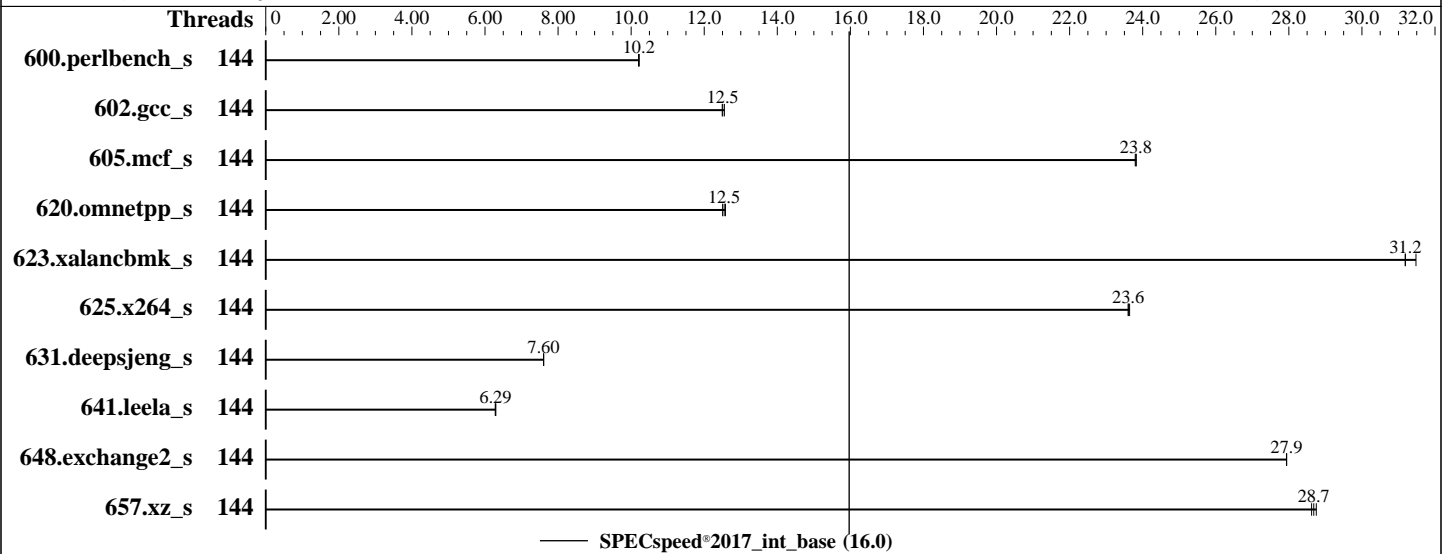

### Hardware

CPU Name: Intel Xeon Gold 6416H  
 Max MHz: 4200  
 Nominal: 2200  
 Enabled: 240 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 45 MB I+D on chip per chip  
 Other: None  
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1.92 TB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for  
 D3986-A1. Released Jul-2023  
 tested as V1.0.0.0 R0.16.0 for D3986-A1 Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at  
 the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2023  
Hardware Availability: Jul-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	144	<b>174</b>	<b>10.2</b>	174	10.2	174	10.2							
602.gcc_s	144	<b>318</b>	<b>12.5</b>	319	12.5	317	12.6							
605.mcf_s	144	198	23.8	<b>198</b>	<b>23.8</b>	198	23.8							
620.omnetpp_s	144	130	12.6	130	12.5	<b>130</b>	<b>12.5</b>							
623.xalancbmk_s	144	45.4	31.2	<b>45.4</b>	<b>31.2</b>	45.0	31.5							
625.x264_s	144	74.7	23.6	<b>74.7</b>	<b>23.6</b>	74.6	23.6							
631.deepsjeng_s	144	<b>188</b>	<b>7.60</b>	188	7.60	188	7.60							
641.leela_s	144	<b>271</b>	<b>6.29</b>	272	6.28	271	6.29							
648.exchange2_s	144	105	27.9	105	27.9	<b>105</b>	<b>27.9</b>							
657.xz_s	144	<b>216</b>	<b>28.7</b>	215	28.8	216	28.6							

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

## General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Override OS Energy Performance = Enabled  
Energy Performance = Balanced Performance  
CPU Performance Boost = Aggressive  
FAN Control = Full  
  
Sysinfo program /home/Benchmark/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Apr 11 05:59:36 2023  
  
SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent\_hugepage
  17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
- 
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux
- 

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
2. w
   05:59:36 up 6:19, 1 user, load average: 2.27, 5.51, 3.80
USER  TTY      FROM          LOGIN@  IDLE   JCPU   PCPU   WHAT
root  tty1    -             23:41   6:16m  3.00s  0.89s  -bash
```

```
-----
3. Username
   From environment variable $USER:  root
```

```
-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals         (-i) 8253994
   max locked memory      (kbytes, -l) 64
   max memory size        (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes     (-u) 8253994
   virtual memory         (kbytes, -v) unlimited
   file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=72
--tune base -o all --define intspeedaffinity --define drop_caches --define smt-on intspeed
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
cores=72 --tune base --output_format all --define intspeedaffinity --define drop_caches --define smt-on
--nopower --runmode speed --tune base --size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templots/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu
```

```
-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Gold 6416H
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 143
   stepping       : 8
   microcode      : 0x2b000161
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapsg
   cpu cores      : 18
   siblings       : 36
   4 physical ids (chips)
   144 processors (hardware threads)
   physical id 0: core ids 0-17
   physical id 1: core ids 0-17
   physical id 2: core ids 0-17
   physical id 3: core ids 0-17
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

physical id 0: apicids 0-35  
physical id 1: apicids 128-163  
physical id 2: apicids 256-291  
physical id 3: apicids 384-419

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               144
On-line CPU(s) list:  0-143
Vendor ID:            GenuineIntel
Model name:           Intel(R) Xeon(R) Gold 6416H
CPU family:           6
Model:                143
Thread(s) per core:  2
Core(s) per socket:  18
Socket(s):            4
Stepping:             8
CPU max MHz:          4200.0000
CPU min MHz:          800.0000
BogoMIPS:             4400.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                    tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                    avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                    arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                    ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                    amx_tile flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:            3.4 MiB (72 instances)
L1i cache:            2.3 MiB (72 instances)
L2 cache:             144 MiB (72 instances)
L3 cache:             180 MiB (4 instances)
NUMA node(s):        4
NUMA node0 CPU(s):   0-17,72-89
NUMA node1 CPU(s):   18-35,90-107
NUMA node2 CPU(s):   36-53,108-125
NUMA node3 CPU(s):   54-71,126-143
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	45M	180M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-17,72-89
node 0 size: 515668 MB
node 0 free: 514045 MB
node 1 cpus: 18-35,90-107
node 1 size: 516086 MB
node 1 free: 514125 MB
node 2 cpus: 36-53,108-125
node 2 size: 516086 MB
node 2 free: 515253 MB
node 3 cpus: 54-71,126-143
node 3 size: 515681 MB
node 3 free: 514871 MB
node distances:
node  0  1  2  3
 0:  10  21  21  31
 1:  21  10  31  21
 2:  21  31  10  21
 3:  31  21  21  10

```

9. /proc/meminfo

MemTotal: 2113047484 kB

10. who -r

run-level 3 Apr 10 23:41

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon appstream-appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

### Platform Notes (Continued)

```

haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuiio issue-add-ssh-keys kexec-load
lunmask man-db-create multipathd nfs nfs-blkmap nmb numad ostree-remount rdisc rpcbind
rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 upower
wickedd
indirect

```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=8b4cfla0-f943-46c1-a409-c2bca0c1173e
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=324M,high
crashkernel=72M,low

```

-----  
14. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.20 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

-----  
15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```

defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

defrag                1
max_ptes_none        511
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /home/Benchmark/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   1.8T  33G  1.8T   2% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          FUJITSU LIMITED
Product Family: SERVER
Serial:          SM2305S00822

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  7x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
  6x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
  1x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
  18x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:          FUJITSU
BIOS Version:         V1.0.0.0 R0.16.0 for D3986-A1
BIOS Date:            03/04/2023
BIOS Revision:        0.16
Firmware Revision:    2.2

```

## Compiler Version Notes

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

```

```

=====
C++       | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----  
Fortran | 648.exchange2\_s(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:  
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMEQUEST 4400E, Intel Xeon Gold 6416H,  
2.20GHz

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: Jul-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-10 16:59:35-0400.

Report generated on 2024-01-29 17:33:53 by CPU2017 PDF formatter v6716.

Originally published on 2023-04-25.