



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

**SPECSpeed®2017\_int\_base = 13.0**

**SPECSpeed®2017\_int\_peak = 13.0**

CPU2017 License: 001176


Test Date: May-2023

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Feb-2023

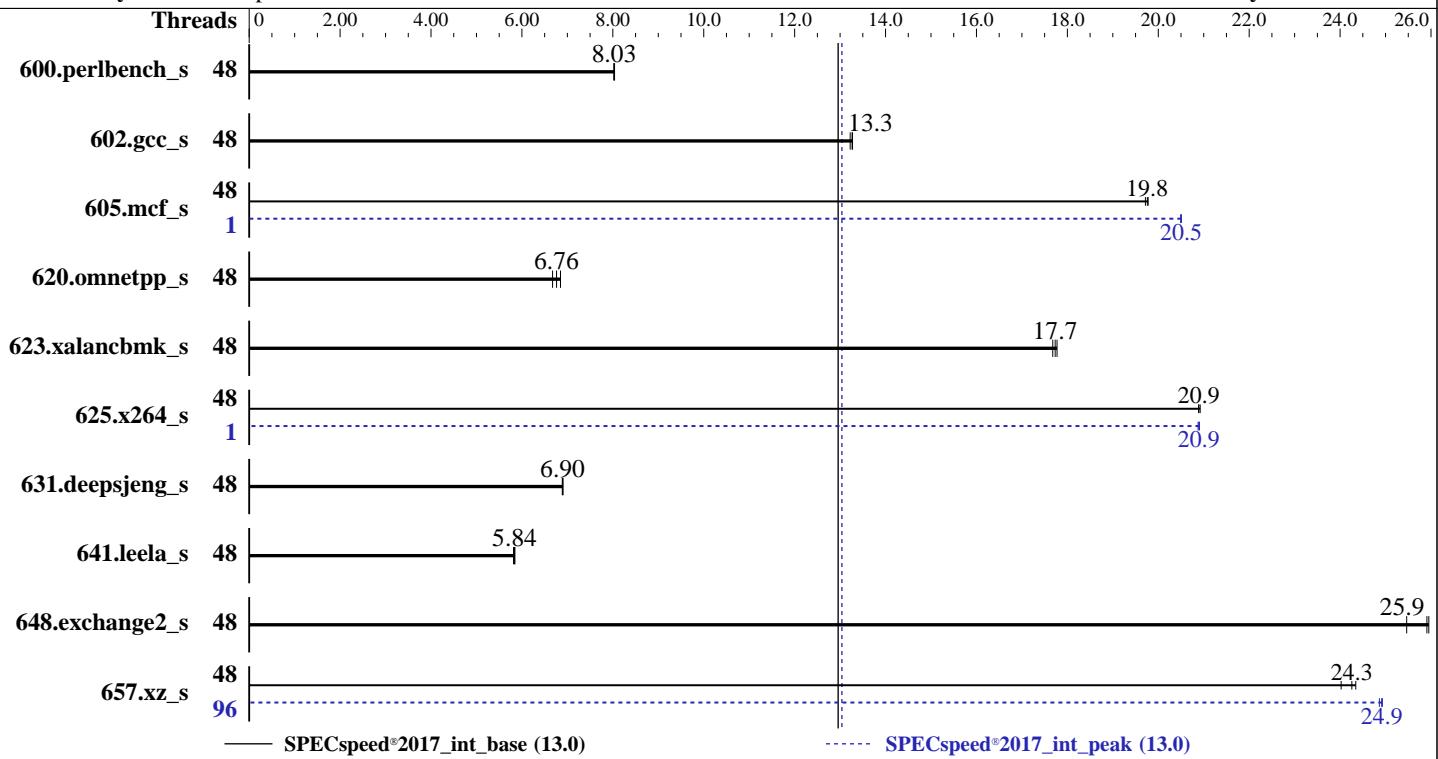

Hardware		Software	
CPU Name:	AMD EPYC 9224	OS:	Ubuntu 22.04.2 LTS
Max MHz:	3700	Compiler:	Kernel 5.15.0-72-generic
Nominal:	2500	Parallel:	C/C++/Fortran: Version 4.0.0 of AOCC
Enabled:	48 cores, 2 chips, 2 threads/core	Firmware:	Yes
Orderable:	1,2 chips	File System:	Version 1.4 released Apr-2023
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	ext4
L2:	1 MB I+D on chip per core	Base Pointers:	Run level 3 (multi-user)
L3:	64 MB I+D on chip per chip, 16 MB shared / 6 cores	Peak Pointers:	64-bit
Other:	None	Other:	64-bit
Memory:	384 GB (24 x 16 GB 1Rx8 PC5-4800B-R)	Power Management:	None
Storage:	1 x 14 TB NVMe SSD	BIOS and OS set to prefer performance at the cost of additional power usage.	
Other:	None		



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

**SPECspeed®2017\_int\_base = 13.0**

**SPECspeed®2017\_int\_peak = 13.0**

CPU2017 License: 001176

Test Date: May-2023

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Feb-2023

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	221	8.02	<b>221</b>	<b>8.03</b>	221	8.04	48	221	8.02	<b>221</b>	<b>8.03</b>	221	8.04		
602.gcc_s	48	300	13.3	301	13.2	<b>300</b>	<b>13.3</b>	48	300	13.3	301	13.2	<b>300</b>	<b>13.3</b>		
605.mcf_s	48	239	19.7	239	19.8	<b>239</b>	<b>19.8</b>	1	230	20.5	<b>230</b>	<b>20.5</b>	230	20.5		
620.omnetpp_s	48	244	6.67	<b>241</b>	<b>6.76</b>	238	6.85	48	244	6.67	<b>241</b>	<b>6.76</b>	238	6.85		
623.xalancbmk_s	48	79.7	17.8	80.2	17.7	<b>79.9</b>	<b>17.7</b>	48	79.7	17.8	80.2	17.7	<b>79.9</b>	<b>17.7</b>		
625.x264_s	48	84.5	20.9	84.3	20.9	<b>84.4</b>	<b>20.9</b>	1	<b>84.4</b>	<b>20.9</b>	84.4	20.9	84.5	20.9		
631.deepsjeng_s	48	208	6.90	<b>208</b>	<b>6.90</b>	208	6.89	48	208	6.90	<b>208</b>	<b>6.90</b>	208	6.89		
641.leela_s	48	293	5.81	<b>292</b>	<b>5.84</b>	292	5.84	48	293	5.81	<b>292</b>	<b>5.84</b>	292	5.84		
648.exchange2_s	48	115	25.5	113	26.0	<b>113</b>	<b>25.9</b>	48	115	25.5	113	26.0	<b>113</b>	<b>25.9</b>		
657.xz_s	48	<b>255</b>	<b>24.3</b>	257	24.0	254	24.3	96	<b>248</b>	<b>24.9</b>	248	24.9	249	24.9		

**SPECspeed®2017\_int\_base = 13.0**

**SPECspeed®2017\_int\_peak = 13.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

Test Date: May-2023

Hardware Availability: Nov-2022

Software Availability: Feb-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-95"  
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_genoa_B_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "96"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
```

```
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:  
NUMA Nodes Per Socket = NPS4  
TSME = Disabled  
Determinism Control = Manual  
Determinism Enable = Disable Performance Determinism  
CTDP Control = Manual  
CTDP = 240  
Package Power Limit Control = Manual  
Package Power Limit = 240

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on as-2025hs-tnr-9224 Fri May 19 17:42:51 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

CPU2017 License: 001176

Test Date: May-2023

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Feb-2023

## Platform Notes (Continued)

```
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.9)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----
-----
1. uname -a
Linux as-2025hs-tnr-9224 5.15.0-72-generic #79-Ubuntu SMP Wed Apr 19 08:22:18 UTC 2023 x86_64 x86_64 x86_64
GNU/Linux
-----
2. w
17:42:51 up 14:37, 4 users, load average: 7.58, 56.91, 80.47
USER      TTY      FROM          LOGIN@    IDLE     JCPU    PCPU WHAT
lab        ttys1     -           03:08    14:33m  1.06s  0.00s -bash
lab        pts/0      -           03:08    14:33m  1.17s  1.03s sudo su -
lab        ttys2     -           03:20    14:22m  0.18s  0.01s -bash
lab        pts/1      -           03:20    6:23m   0.06s  0.16s sudo su -
-----
3. Username
From environment variable $USER: root
From the command 'logname': lab
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)        unlimited
stack(kbytes)       unlimited
coredump(blocks)    0
memory(kbytes)      unlimited
locked memory(kbytes) 2097152
process            1545875
nofiles             1024
vmemory(kbytes)     unlimited
locks               unlimited
rtprio              0
-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

CPU2017 License: 001176

Test Date: May-2023

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Feb-2023

## Platform Notes (Continued)

```
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_speed_aocc400_genoa_B1.py
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo
model name      : AMD EPYC 9224 24-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa101116
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 24
siblings         : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 1: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-11,16-27,32-43,48-59
physical id 1: apicids 64-75,80-91,96-107,112-123
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 96
On-line CPU(s) list:    0-95
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9224 24-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:            3706.0540
CPU min MHz:            1500.0000
BogoMIPS:                4999.76
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                           constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
                           pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

**SPECspeed®2017\_int\_base = 13.0**

**SPECspeed®2017\_int\_peak = 13.0**

**CPU2017 License:** 001176

**Test Date:** May-2023

**Test Sponsor:** Supermicro

**Hardware Availability:** Nov-2022

**Tested by:** Supermicro

**Software Availability:** Feb-2023

## Platform Notes (Continued)

```
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 emms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi
umip pkus ospkpe avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitualg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_ll1d
```

Virtualization:

AMD-V

L1d cache:	1.5 MiB (48 instances)
L1i cache:	1.5 MiB (48 instances)
L2 cache:	48 MiB (48 instances)
L3 cache:	128 MiB (8 instances)

NUMA node(s):

8

NUMA node0 CPU(s):	0-5,48-53
NUMA node1 CPU(s):	6-11,54-59
NUMA node2 CPU(s):	12-17,60-65
NUMA node3 CPU(s):	18-23,66-71
NUMA node4 CPU(s):	24-29,72-77
NUMA node5 CPU(s):	30-35,78-83
NUMA node6 CPU(s):	36-41,84-89
NUMA node7 CPU(s):	42-47,90-95

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-5,48-53

node 0 size: 48095 MB

node 0 free: 47340 MB

node 1 cpus: 6-11,54-59

node 1 size: 48368 MB

node 1 free: 47494 MB

node 2 cpus: 12-17,60-65

node 2 size: 48368 MB

node 2 free: 47490 MB

node 3 cpus: 18-23,66-71

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

CPU2017 License: 001176

Test Date: May-2023

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Feb-2023

## Platform Notes (Continued)

```
node 3 size: 48368 MB
node 3 free: 47600 MB
node 4 cpus: 24-29,72-77
node 4 size: 48368 MB
node 4 free: 47681 MB
node 5 cpus: 30-35,78-83
node 5 size: 48368 MB
node 5 free: 47672 MB
node 6 cpus: 36-41,84-89
node 6 size: 48309 MB
node 6 free: 47623 MB
node 7 cpus: 42-47,90-95
node 7 size: 48333 MB
node 7 free: 47527 MB
node distances:
node   0   1   2   3   4   5   6   7
 0: 10  11  11  11  32  32  32  32
 1: 11  10  11  11  32  32  32  32
 2: 11  11  10  11  32  32  32  32
 3: 11  11  11  10  32  32  32  32
 4: 32  32  32  32  10  11  11  11
 5: 32  32  32  32  11  10  11  11
 6: 32  32  32  32  11  11  10  11
 7: 32  32  32  32  11  11  11  10
```

-----  
9. /proc/meminfo  
MemTotal: 395860884 kB

-----  
10. who -r  
run-level 3 May 19 03:07

-----  
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.9)  
Default Target Status  
multi-user degraded

-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

-----  
13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init  
cloud-init-local console-setup cron dmesg e2scrub\_reap finalrd getty@ gpu-manager  
grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor  
lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog  
secureboot-db setvtrgb ssh systemd systemd-networkd systemd-networkd-wait-online systemd-pstore  
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw  
vgauth  
enabled-runtime netplan-ovs-cleanupsystemd-fsck-rootsystemd-remount-fs  
disabled console-getty debug-shell iscsid nftables rsync serial-getty@  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync upower  
generated apport  
indirect uuidd  
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

Test Date: May-2023

Hardware Availability: Nov-2022

Software Availability: Feb-2023

## Platform Notes (Continued)

x11-common

```
-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
    BOOT_IMAGE=/boot/vmlinuz-5.15.0-72-generic  
    root=UUID=8eea9839-275b-42c2-ae30-6471898efd3d  
    ro  
  
-----  
15. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 1.50 GHz and 2.50 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes  
        Boost States: 0  
        Total States: 3  
        Pstate-P0: 2500MHz  
  
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       0  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   1  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           1  
  
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           [always] defer defer+madvise madvise never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled   always within_size advise [never] deny force  
  
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag              1  
max_ptes_none       511  
max_ptes_shared     256  
max_ptes_swap       64  
pages_to_scan       4096  
scan_sleep_millisecs 10000
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

CPU2017 License: 001176

Test Date: May-2023

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Feb-2023

## Platform Notes (Continued)

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 22.04.2 LTS

-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 ext4 14T 17G 14T 1% /

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: Supermicro  
Product: Super Server  
Product Family: SMC H13  
Serial: 123456789

-----  
22. dmidecode  
Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
24x SK Hynix HMCG78MEBRA107N 16 GB 1 rank 4800

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.4  
BIOS Date: 04/19/2023  
BIOS Revision: 5.27

## Compiler Version Notes

=====| 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
=====| 657.xz\_s(base, peak)

=====AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
=====| 641.leela\_s(base, peak)

=====AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

Test Date: May-2023

Hardware Availability: Nov-2022

Software Availability: Feb-2023

## Compiler Version Notes (Continued)

Fortran | 648.exchange2\_s(base, peak)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

602.gcc\_S: -DSPEC\_LP64

605.mcf\_S: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM

-ffast-math -fopenmp -fsto -fstruct-layout=7

-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3

-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang

-lamdalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

CPU2017 License: 001176

Test Date: May-2023

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Feb-2023

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

Test Date: May-2023

Hardware Availability: Nov-2022

Software Availability: Feb-2023

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: Same as 605.mcf\_s

657.xz\_s: Same as 605.mcf\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

Hyper A+ Server AS -2025HS-TNR  
(H13DSH , AMD EPYC 9224)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.0

Test Date: May-2023

Hardware Availability: Nov-2022

Software Availability: Feb-2023

## Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-19 13:42:50-0400.

Report generated on 2023-06-20 23:27:35 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-20.