



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11


(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Apr-2023

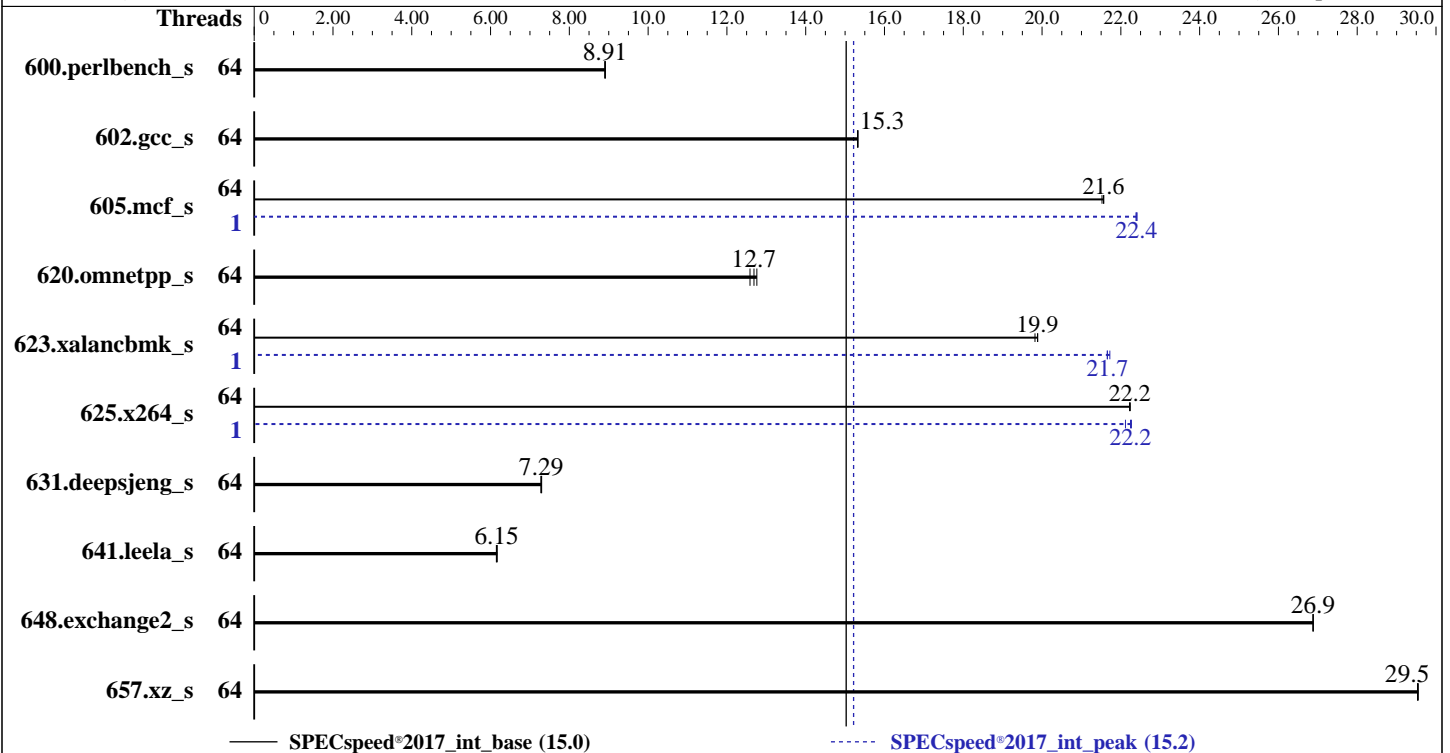

Hardware

CPU Name: AMD EPYC 9384X
 Max MHz: 3900
 Nominal: 3100
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 768 MB I+D on chip per chip,
 96 MB shared / 4 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: HPE BIOS Version v1.50 10/04/2023 released Oct-2023
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Apr-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	199	8.90	199	8.92	<u>199</u>	<u>8.91</u>	64	199	8.90	199	8.92	<u>199</u>	<u>8.91</u>
602.gcc_s	64	260	15.3	260	15.3	<u>260</u>	<u>15.3</u>	64	260	15.3	260	15.3	<u>260</u>	<u>15.3</u>
605.mcf_s	64	219	21.6	219	21.5	<u>219</u>	<u>21.6</u>	1	211	22.4	<u>211</u>	<u>22.4</u>	211	22.4
620.omnetpp_s	64	128	12.8	130	12.6	<u>129</u>	<u>12.7</u>	64	128	12.8	130	12.6	<u>129</u>	<u>12.7</u>
623.xalancbmk_s	64	71.2	19.9	71.5	19.8	<u>71.3</u>	<u>19.9</u>	1	65.2	21.7	65.4	21.7	<u>65.4</u>	<u>21.7</u>
625.x264_s	64	79.3	22.2	<u>79.4</u>	<u>22.2</u>	79.4	22.2	1	79.8	22.1	<u>79.3</u>	<u>22.2</u>	79.2	22.3
631.deepsjeng_s	64	196	7.30	197	7.28	<u>197</u>	<u>7.29</u>	64	196	7.30	197	7.28	<u>197</u>	<u>7.29</u>
641.leela_s	64	<u>277</u>	<u>6.15</u>	277	6.17	278	6.15	64	<u>277</u>	<u>6.15</u>	277	6.17	278	6.15
648.exchange2_s	64	109	26.9	109	26.9	<u>109</u>	<u>26.9</u>	64	109	26.9	109	26.9	<u>109</u>	<u>26.9</u>
657.xz_s	64	209	29.5	<u>209</u>	<u>29.5</u>	209	29.6	64	209	29.5	<u>209</u>	<u>29.5</u>	209	29.6

SPECspeed®2017_int_base = **15.0**

SPECspeed®2017_int_peak = **15.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Apr-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
AMD SMT Option set to Disabled
Memory Patrol Scrubbing set to Disabled
NUMA memory domains per socket set to Four memory domains per socket
Last-Level Cache (LLC) as NUMA Node set to Enabled
ACPI CST C2 Latency set to 18 microseconds
Memory PStates set to Disabled
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0xa10123e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version Genoa-XPI 1.0.0.9

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Nov 6 10:01:49 2023
```

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Apr-2023

Platform Notes (Continued)

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
10:01:49 up 4 min, 3 users, load average: 0.28, 0.39, 0.18
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root : : 29Apr22 ?xdm? 40.03s 0.02s gdm-session-worker [pam/gdm-password]
root :1 :1 29Apr22 ?xdm? 40.03s 0.00s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root pts/1 172.17.1.13 29Apr22 13.00s 1.01s 0.09s /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3093324
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```
max user processes      (-u) 3093324
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/1
-bash
python3 ./run_intspeed_znver4_A1_2.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.047/templogs/preenv.intspeed.047.0.log --lognum 047.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9384X 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 2
microcode      : 0xa10123e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 32
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-31
physical id 1: apicids 32-63
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            64
On-line CPU(s) list: 0-63
Vendor ID:         AuthenticAMD
Model name:        AMD EPYC 9384X 32-Core Processor
CPU family:        25
Model:             17
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s):         2
Stepping:          2
Frequency boost:   enabled
CPU max MHz:       3100.0000
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Apr-2023

Platform Notes (Continued)

```

CPU min MHz:          1500.0000
BogoMIPS:             6190.72
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                    constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                    pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
                    xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                    misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
                    perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single
                    hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                    xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16
                    clzero irperf xsaveptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock
                    nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                    pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
                    ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:      AMD-V
L1d cache:           2 MiB (64 instances)
L1i cache:           2 MiB (64 instances)
L2 cache:            64 MiB (64 instances)
L3 cache:            1.5 GiB (16 instances)
NUMA node(s):       16
NUMA node0 CPU(s):  0-3
NUMA node1 CPU(s):  4-7
NUMA node2 CPU(s):  8-11
NUMA node3 CPU(s):  12-15
NUMA node4 CPU(s):  16-19
NUMA node5 CPU(s):  20-23
NUMA node6 CPU(s):  24-27
NUMA node7 CPU(s):  28-31
NUMA node8 CPU(s):  32-35
NUMA node9 CPU(s):  36-39
NUMA node10 CPU(s): 40-43
NUMA node11 CPU(s): 44-47
NUMA node12 CPU(s): 48-51
NUMA node13 CPU(s): 52-55
NUMA node14 CPU(s): 56-59
NUMA node15 CPU(s): 60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                             filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	96M	1.5G	16	Unified	3	98304	1	64

8. numactl --hardware

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Apr-2023

Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

```

node 0 cpus: 0-3
node 0 size: 48000 MB
node 0 free: 47400 MB
node 1 cpus: 4-7
node 1 size: 48382 MB
node 1 free: 48190 MB
node 2 cpus: 8-11
node 2 size: 48382 MB
node 2 free: 48118 MB
node 3 cpus: 12-15
node 3 size: 48382 MB
node 3 free: 47671 MB
node 4 cpus: 16-19
node 4 size: 48382 MB
node 4 free: 48133 MB
node 5 cpus: 20-23
node 5 size: 48382 MB
node 5 free: 48173 MB
node 6 cpus: 24-27
node 6 size: 48382 MB
node 6 free: 48264 MB
node 7 cpus: 28-31
node 7 size: 48348 MB
node 7 free: 48232 MB
node 8 cpus: 32-35
node 8 size: 48382 MB
node 8 free: 48143 MB
node 9 cpus: 36-39
node 9 size: 48382 MB
node 9 free: 48150 MB
node 10 cpus: 40-43
node 10 size: 48382 MB
node 10 free: 48333 MB
node 11 cpus: 44-47
node 11 size: 48382 MB
node 11 free: 48321 MB
node 12 cpus: 48-51
node 12 size: 48382 MB
node 12 free: 48328 MB
node 13 cpus: 52-55
node 13 size: 48382 MB
node 13 free: 48345 MB
node 14 cpus: 56-59
node 14 size: 48382 MB
node 14 free: 48249 MB
node 15 cpus: 60-63
node 15 size: 48030 MB
node 15 free: 47918 MB

```

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	12	12	12	12	12	12	32	32	32	32	32	32	32	32
1:	11	10	12	12	12	12	12	12	32	32	32	32	32	32	32	32
2:	12	12	10	11	12	12	12	12	32	32	32	32	32	32	32	32
3:	12	12	11	10	12	12	12	12	32	32	32	32	32	32	32	32
4:	12	12	12	12	10	11	12	12	32	32	32	32	32	32	32	32
5:	12	12	12	12	11	10	12	12	32	32	32	32	32	32	32	32
6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Apr-2023

Platform Notes (Continued)

8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	11	10

9. /proc/meminfo
MemTotal: 791916768 kB

10. who -r
run-level 5 Apr 29 17:30

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiui issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server rdisc rpcbnd rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 upower wpa_supplicant@
indirect	pcscd saned@ wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=cc50ea22-f4c4-4693-9a2b-c919375b4f71
splash=silent
resume=/dev/disk/by-uuid/fceblba5-a417-49d3-bc88-b35b10698f0d
mitigations=auto
quiet
security=apparmor
crashkernel=280M,high
crashkernel=72M,low

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 3.10 GHz.
The governor "performance" may decide which speed to use within this range.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Apr-2023

Platform Notes (Continued)

boost state support:

Supported: yes

Active: yes

15. tuned-adm active
Current active profile: latency-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 3
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdc3 xfs 99G 48G 51G 49% /home

21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Apr-2023

Platform Notes (Continued)

Vendor: HPE
Product: ProLiant DL385 Gen11
Product Family: ProLiant
Serial: DL385G11-008

22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800
14x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.50
BIOS Date: 10/04/2023
BIOS Revision: 1.50
Firmware Revision: 1.50

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 648.exchange2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Apr-2023

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

```

C++ benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Apr-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flt0 -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Apr-2023

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: Same as 605.mcf_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECspeed®2017_int_base = 15.0

SPECspeed®2017_int_peak = 15.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Apr-2023

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.5.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.5.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-05 23:31:48-0500.

Report generated on 2023-12-06 19:43:29 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-06.