



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jan-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

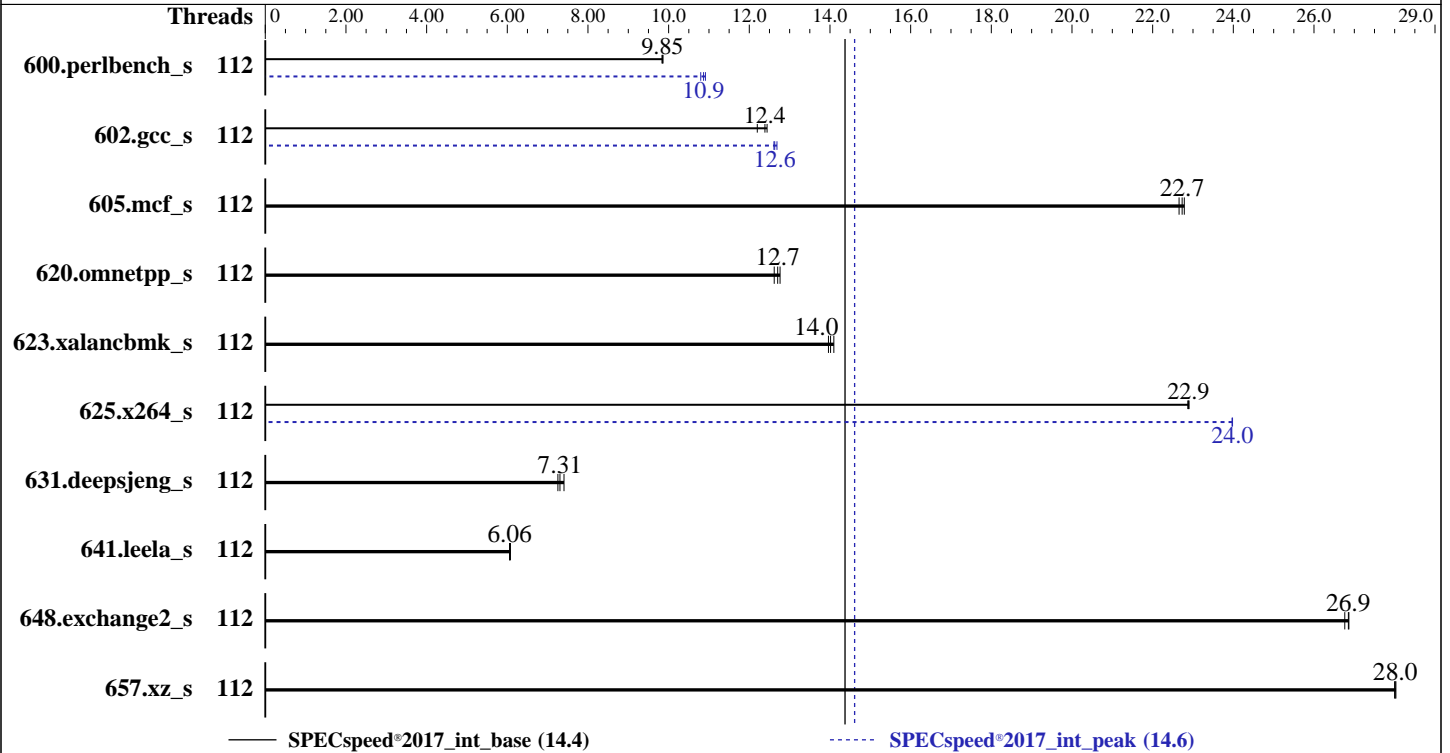

### Hardware

CPU Name: Intel Xeon Gold 5520+  
 Max MHz: 4000  
 Nominal: 2200  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 52.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 1 x 512 GB M.2 NVMe SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 2.1 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jan-2024  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	<b>180</b>	<b>9.85</b>	180	9.84	180	9.86	112	164	10.8	163	10.9	<b>163</b>	<b>10.9</b>
602.gcc_s	112	326	12.2	<b>321</b>	<b>12.4</b>	320	12.4	112	316	12.6	<b>315</b>	<b>12.6</b>	314	12.7
605.mcf_s	112	<b>208</b>	<b>22.7</b>	208	22.7	207	22.8	112	<b>208</b>	<b>22.7</b>	208	22.7	207	22.8
620.omnetpp_s	112	<b>128</b>	<b>12.7</b>	128	12.8	129	12.6	112	<b>128</b>	<b>12.7</b>	128	12.8	129	12.6
623.xalancbmk_s	112	101	14.1	<b>101</b>	<b>14.0</b>	101	14.0	112	101	14.1	<b>101</b>	<b>14.0</b>	101	14.0
625.x264_s	112	77.1	22.9	<b>77.1</b>	<b>22.9</b>	77.0	22.9	112	73.6	24.0	<b>73.6</b>	<b>24.0</b>	73.6	24.0
631.deepsjeng_s	112	198	7.25	<b>196</b>	<b>7.31</b>	193	7.41	112	198	7.25	<b>196</b>	<b>7.31</b>	193	7.41
641.leela_s	112	<b>282</b>	<b>6.06</b>	282	6.06	281	6.08	112	<b>282</b>	<b>6.06</b>	282	6.06	281	6.08
648.exchange2_s	112	109	26.9	<b>109</b>	<b>26.9</b>	110	26.8	112	109	26.9	<b>109</b>	<b>26.9</b>	110	26.8
657.xz_s	112	<b>221</b>	<b>28.0</b>	221	28.0	221	28.0	112	<b>221</b>	<b>28.0</b>	221	28.0	221	28.0

SPECspeed®2017\_int\_base = **14.4**

SPECspeed®2017\_int\_peak = **14.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jan-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Platform Notes

### BIOS Settings:

Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance  
DCU Streamer Prefetcher = Disable  
LLC Dead Line Alloc = Disable  
KTI Prefetch = Enable  
Stale AtoS = Disable  
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on 135-172-248 Fri Jan 19 18:50:48 2024

SUT (System Under Test) info as seen by some common utilities.

### ----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux 135-172-248 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
18:50:48 up 4:17, 1 user, load average: 16.61, 41.13, 47.29  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 14:34 4:14m 0.89s 0.00s -bash

-----

3. Username  
From environment variable \$USER: root

-----

4. ulimit -a  
core file size (blocks, -c) unlimited

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jan-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 4126860
max locked memory  (kbytes, -l) 64
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 4126860
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=56 --tune base,peak -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=56 --tune base,peak --output_format all
  --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
  --size refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.007/templogs/preenv.intspeed.007.0.log --lognum 007.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 5520+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 28
siblings       : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-27
physical id 1: core ids 0-27
physical id 0: apicids 0-55
physical id 1: apicids 128-183
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jan-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    112
On-line CPU(s) list:      0-111
Vendor ID:                 GenuineIntel
Model name:               INTEL(R) XEON(R) GOLD 5520+
CPU family:               6
Model:                    207
Thread(s) per core:      2
Core(s) per socket:      28
Socket(s):                2
Stepping:                 2
Frequency boost:          enabled
CPU max MHz:              2201.0000
CPU min MHz:              800.0000
BogoMIPS:                 4400.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                          clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                          lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                          nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                          ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                          sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                          lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                          invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                          vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                          bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                          xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                          cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                          avx512vbmi unip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                          avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                          cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                          arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:           VT-x
L1d cache:                2.6 MiB (56 instances)
L1i cache:                1.8 MiB (56 instances)
L2 cache:                 112 MiB (56 instances)
L3 cache:                 105 MiB (2 instances)
NUMA node(s):            2
NUMA node0 CPU(s):       0-27,56-83
NUMA node1 CPU(s):       28-55,84-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRBS-eIBRS SW
                          sequence
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.6M	12	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	2M	112M	16	Unified	2	2048	1	64
L3	52.5M	105M	15	Unified	3	57344	1	64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jan-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-27,56-83
node 0 size: 515684 MB
node 0 free: 506589 MB
node 1 cpus: 28-55,84-111
node 1 size: 516060 MB
node 1 free: 508219 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10
```

9. /proc/meminfo

```
MemTotal: 1056507788 kB
```

10. who -r

```
run-level 3 Jan 19 14:33
```

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix
purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
wicked-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rpcbind
rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
indirect wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=9de9855c-b179-4e5b-8330-3742dedc18b2
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 2.20 GHz.
The governor "ondemand" may decide which speed to use
within this range.
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jan-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

boost state support:  
Supported: yes  
Active: yes

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 475G 40G 435G 9% /
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: X13DEG-QT
Product Family: Family
Serial: 1234567890
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jan-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

14x SK Hynix HMC94AGBRA181N 64 GB 2 rank 5600, configured at 4800  
2x SK Hynix HMC94AGBRA184N 64 GB 2 rank 5600, configured at 4800

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 2.1  
BIOS Date: 12/12/2023  
BIOS Revision: 5.32

## Compiler Version Notes

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
657.xz\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 620.omnetpp\_s(base, peak) 623.xalanbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
641.leela\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 648.exchange2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

### C benchmarks:

icx

### C++ benchmarks:

icpx

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jan-2024  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:  
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:  
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jan-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes
```

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

GPU SuperServer SYS-741GE-TNRT  
(X13DEG-QT , Intel Xeon Gold 5520+)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jan-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-19 05:50:48-0500.  
Report generated on 2024-02-14 12:25:41 by CPU2017 PDF formatter v6716.  
Originally published on 2024-02-14.