



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd. NF5180A7 (AMD EPYC 9754)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

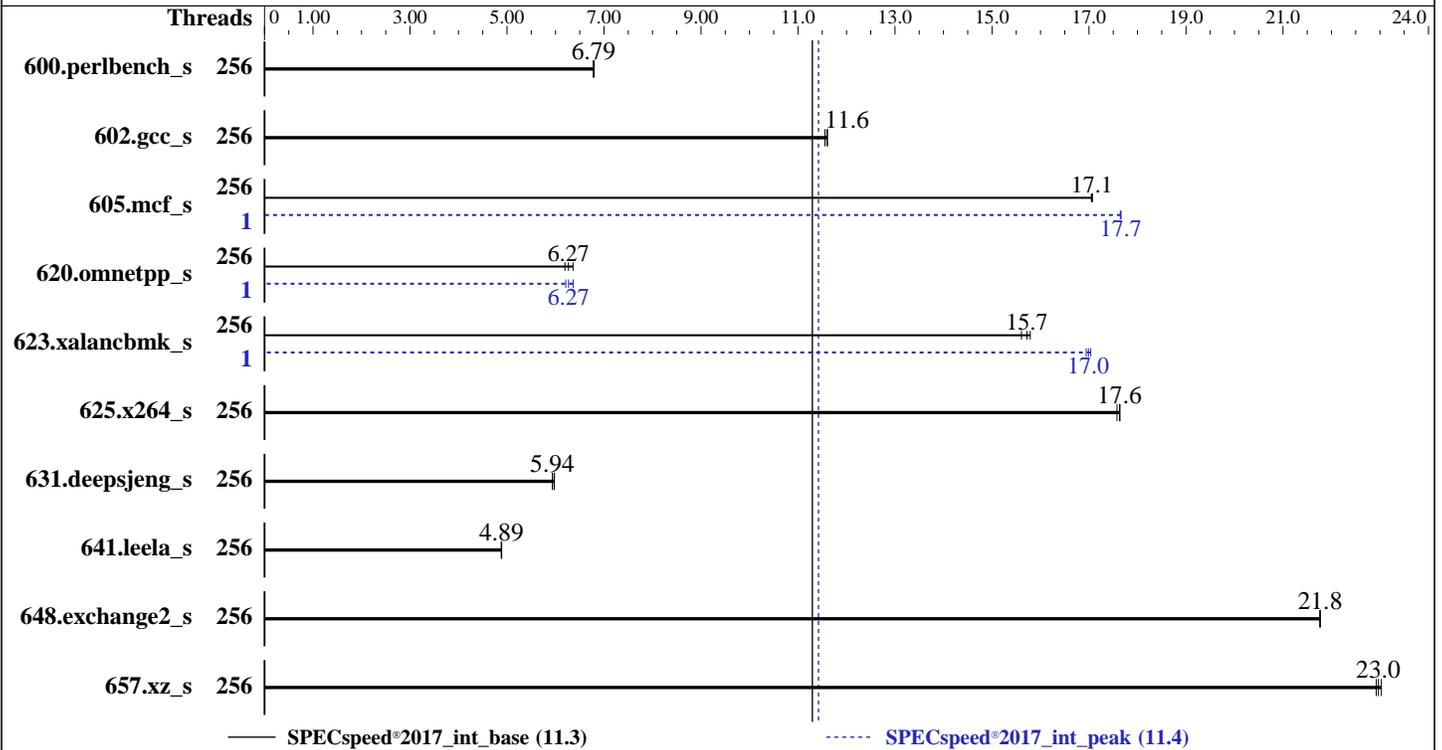

### Hardware

CPU Name: AMD EPYC 9754  
 Max MHz: 3100  
 Nominal: 2250  
 Enabled: 256 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 16 MB shared / 8 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1 TB NVME SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9 (Plow)  
 5.14.0-70.22.1.el9\_0.x86\_64  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 04.02.19 released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.  
NF5180A7 (AMD EPYC 9754)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

CPU2017 License: 3358  
Test Sponsor: IEIT Systems Co., Ltd.  
Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024  
Hardware Availability: Feb-2023  
Software Availability: Nov-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	261	6.80	<u>262</u>	<u>6.79</u>	262	6.78	256	261	6.80	<u>262</u>	<u>6.79</u>	262	6.78
602.gcc_s	256	<u>343</u>	<u>11.6</u>	343	11.6	345	11.6	256	<u>343</u>	<u>11.6</u>	343	11.6	345	11.6
605.mcf_s	256	277	17.0	<u>277</u>	<u>17.1</u>	277	17.1	1	267	17.7	<u>267</u>	<u>17.7</u>	268	17.6
620.omnetpp_s	256	256	6.36	<u>260</u>	<u>6.27</u>	263	6.19	1	<u>260</u>	<u>6.27</u>	256	6.36	263	6.21
623.xalancbmk_s	256	89.7	15.8	<u>90.1</u>	<u>15.7</u>	90.8	15.6	1	<u>83.4</u>	<u>17.0</u>	83.2	17.0	83.6	16.9
625.x264_s	256	100	17.6	100	17.6	<u>100</u>	<u>17.6</u>	256	100	17.6	100	17.6	<u>100</u>	<u>17.6</u>
631.deepsjeng_s	256	<u>241</u>	<u>5.94</u>	241	5.94	240	5.98	256	<u>241</u>	<u>5.94</u>	241	5.94	240	5.98
641.leela_s	256	350	4.88	349	4.89	<u>349</u>	<u>4.89</u>	256	350	4.88	349	4.89	<u>349</u>	<u>4.89</u>
648.exchange2_s	256	135	21.8	<u>135</u>	<u>21.8</u>	135	21.8	256	135	21.8	<u>135</u>	<u>21.8</u>	135	21.8
657.xz_s	256	<u>269</u>	<u>23.0</u>	270	22.9	268	23.0	256	<u>269</u>	<u>23.0</u>	270	22.9	268	23.0

SPECspeed®2017\_int\_base = **11.3**

SPECspeed®2017\_int\_peak = **11.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358  
**Test Sponsor:** IEIT Systems Co., Ltd.  
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH = "/home/CPU2017/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

```
SVM Mode set to disable
DRAM Scrub time set to disable
NUMA nodes per socket set to NPS1
Determinism Slider set to Power
cTDP set to 400
Package Power Limit set to 400
SMT Mode set to disable
```

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Feb 23 10:25:47 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358  
**Test Sponsor:** IEIT Systems Co., Ltd.  
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux

```

```

-----
2. w
 10:25:47 up 2 min,  1 user,  load average: 0.58, 0.51, 0.21
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     tty1      10:25   19.00s  1.32s  0.14s  /bin/bash ./amd_speed_aocc400_genoa_B1.sh

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 1546143
max locked memory           (kbytes, -l) 2097152
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 1546143
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_speed_aocc400_genoa_B1.py

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358  
**Test Sponsor:** IEIT Systems Co., Ltd.  
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

```
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.005/templogs/preenv.intspeed.005.0.log --lognum 005.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model         : 160
stepping      : 1
microcode     : 0xaa00107
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 128
siblings      : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 1: core ids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 0: apicids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
64-471,480-487,496-503
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):   32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:       Little Endian
CPU(s):           256
On-line CPU(s) list: 0-255
Vendor ID:        AuthenticAMD
BIOS Vendor ID:   Advanced Micro Devices, Inc.
Model name:       AMD EPYC 9754 128-Core Processor
BIOS Model name:  AMD EPYC 9754 128-Core Processor
CPU family:       25
Model:            160
Thread(s) per core: 1
Core(s) per socket: 128
Socket(s):        2
Stepping:         1
Frequency boost:  enabled
CPU max MHz:      3100.3411
CPU min MHz:      1500.0000
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd. NF5180A7 (AMD EPYC 9754)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358  
**Test Sponsor:** IEIT Systems Co., Ltd.  
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

BogoMIPS:          4500.02
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                  clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                  constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                  pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                  popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                  abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                  perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                  invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                  avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                  avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                  xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                  avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                  svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                  pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                  umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                  avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:   AMD-V
L1d cache:       8 MiB (256 instances)
L1i cache:       8 MiB (256 instances)
L2 cache:        256 MiB (256 instances)
L3 cache:        512 MiB (32 instances)
NUMA node(s):    2
NUMA node0 CPU(s): 0-127
NUMA node1 CPU(s): 128-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                          filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d   32K      8M      8 Data          1     64      1           64
L1i   32K      8M      8 Instruction   1     64      1           64
L2    1M      256M     8 Unified       2  2048     1           64
L3    16M     512M    16 Unified       3 16384     1           64

```

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-127
node 0 size: 193239 MB
node 0 free: 190932 MB
node 1 cpus: 128-255
node 1 size: 193401 MB
node 1 free: 191660 MB
node distances:
node  0  1
 0:  10  32
 1:  32  10

```

9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358  
**Test Sponsor:** IEIT Systems Co., Ltd.  
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

MemTotal: 395919932 kB

-----  
10. who -r  
run-level 3 Feb 23 10:23

-----  
11. Systemd service manager version: systemd 250 (250-6.el9\_0)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled dbus-broker getty@ tuned udisks2 upower  
enabled-runtime systemd-remount-fs  
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd  
blk-availability canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond  
debug-shell firewalld irqbalance kdump kvm\_stat lvm2-monitor man-db-restart-cache-update  
rdmsonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdb-rebuild  
rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd  
systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9\_0.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap

-----  
14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 1.50 GHz and 2.25 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2250MHz

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358  
**Test Sponsor:** IEIT Systems Co., Ltd.  
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

vm.dirty_ratio                8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode         1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
20. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   819G  28G  791G   4% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      IEI
Product:     NF5180-A7-A0-R0-00
Product Family: Not specified
Serial:      000000000

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
12x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358  
**Test Sponsor:** IEIT Systems Co., Ltd.  
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 04.02.19  
BIOS Date: 03/27/2023

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
657.xz\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalanbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
641.leela\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

### C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition -Ofast -march=znver4

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-fstruct-layout=9 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**  
**NF5180A7 (AMD EPYC 9754)**

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

605.mcf\_s (continued):

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: basepeak = yes

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.  
NF5180A7 (AMD EPYC 9754)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = 11.4

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-amd-V3.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-amd-V3.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-23 10:25:46-0500.

Report generated on 2024-03-14 10:53:38 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-13.