



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2024

Hardware Availability: Mar-2024

Software Availability: Dec-2023

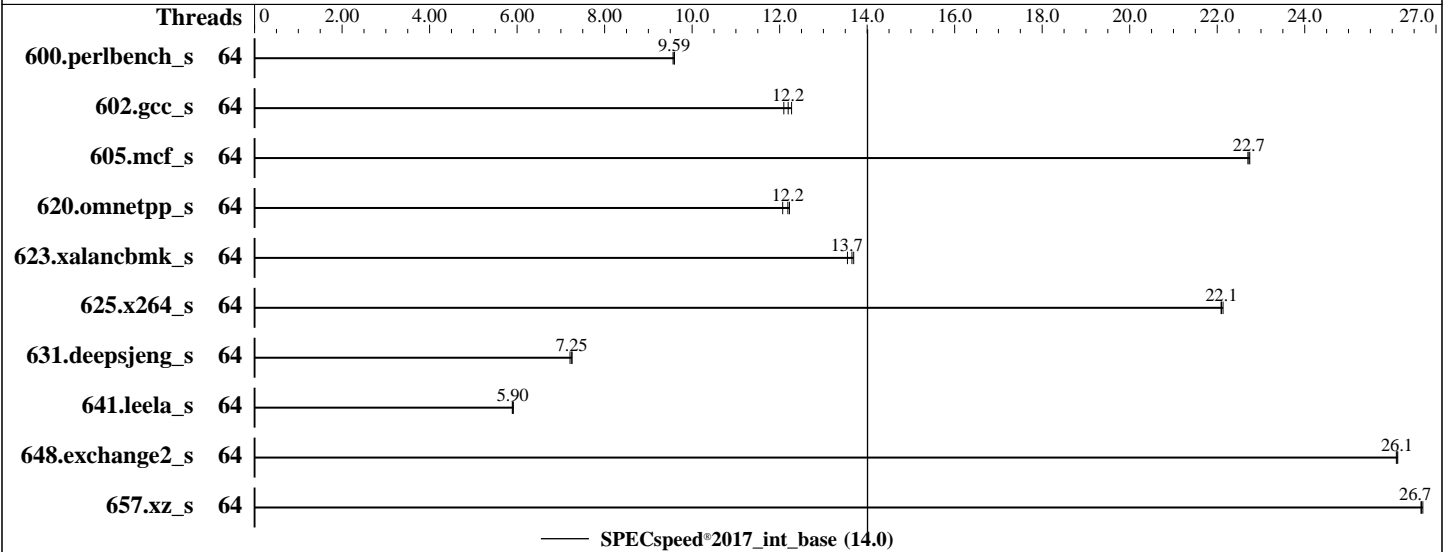

### Hardware

CPU Name: Intel Xeon Gold 6526Y  
 Max MHz: 3900  
 Nominal: 2800  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 37.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version FNE113F 2.20 released Jan-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Mar-2024  
**Software Availability:** Dec-2023

## Results Table

| Benchmark       | Base    |            |             |            |             |             |             |         | Peak    |       |         |       |         |       |  |  |
|-----------------|---------|------------|-------------|------------|-------------|-------------|-------------|---------|---------|-------|---------|-------|---------|-------|--|--|
|                 | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds     | Ratio       | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |  |  |
| 600.perlbench_s | 64      | 185        | 9.60        | 186        | 9.56        | <b>185</b>  | <b>9.59</b> |         |         |       |         |       |         |       |  |  |
| 602.gcc_s       | 64      | 329        | 12.1        | <b>327</b> | <b>12.2</b> | 324         | 12.3        |         |         |       |         |       |         |       |  |  |
| 605.mcf_s       | 64      | <b>208</b> | <b>22.7</b> | 208        | 22.7        | 208         | 22.7        |         |         |       |         |       |         |       |  |  |
| 620.omnetpp_s   | 64      | 135        | 12.1        | 133        | 12.2        | <b>134</b>  | <b>12.2</b> |         |         |       |         |       |         |       |  |  |
| 623.xalancbmk_s | 64      | 103        | 13.7        | <b>104</b> | <b>13.7</b> | 105         | 13.5        |         |         |       |         |       |         |       |  |  |
| 625.x264_s      | 64      | 79.9       | 22.1        | 79.7       | 22.1        | <b>79.8</b> | <b>22.1</b> |         |         |       |         |       |         |       |  |  |
| 631.deepsjeng_s | 64      | <b>198</b> | <b>7.25</b> | 199        | 7.21        | 198         | 7.26        |         |         |       |         |       |         |       |  |  |
| 641.leela_s     | 64      | 290        | 5.89        | 288        | 5.91        | <b>289</b>  | <b>5.90</b> |         |         |       |         |       |         |       |  |  |
| 648.exchange2_s | 64      | <b>113</b> | <b>26.1</b> | 113        | 26.1        | 113         | 26.1        |         |         |       |         |       |         |       |  |  |
| 657.xz_s        | 64      | 232        | 26.7        | <b>232</b> | <b>26.7</b> | 232         | 26.7        |         |         |       |         |       |         |       |  |  |

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

"/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.0

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Custom Mode  
CPU P-state Control set to Legacy

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Feb 22 10:59:39 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
10:59:39 up 3 min, 1 user, load average: 0.08, 0.02, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 10:57 41.00s 1.30s 0.01s sh
Run322-compliant-ic2023.2.3-lin-sapphirerapids-speedint-base-smt-on-20231121.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4127016
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Mar-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 4127016
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./run_SD550V3_EMR.sh
sh Run322-compliant-ic2023.2.3-lin-sapphirerapids-speedint-base-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=32 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=32 --tune base --output_format all
  --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base
  --size refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.027/temlogs/preenv.intspeed.027.0.log --lognum 027.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6526Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000200
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 16
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     46 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            64
On-line CPU(s) list: 0-63

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Mar-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6526Y
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
Stepping: 2
Frequency boost: enabled
CPU max MHz: 2801.0000
CPU min MHz: 800.0000
BogoMIPS: 5600.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavesopt xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 64 MiB (32 instances)
L3 cache: 75 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-15,32-47
NUMA node1 CPU(s): 16-31,48-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 1.5M 12 Data 1 64 1 64
L1i 32K 1M 8 Instruction 1 64 1 64
L2 2M 64M 16 Unified 2 2048 1 64
L3 37.5M 75M 15 Unified 3 40960 1 64

```

8. numactl --hardware  
NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Mar-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 515751 MB
node 0 free: 514626 MB
node 1 cpus: 16-31,48-63
node 1 size: 516032 MB
node 1 free: 514951 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo  
MemTotal: 1056546628 kB

10. who -r  
run-level 3 Feb 22 10:56

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES   |
|-----------------|--|
| enabled         | YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  |
| enabled-runtime | systemd-remount-fs   |
| disabled        | autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd |
| indirect        | wickedd  |

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=153ce07c-609f-4750-a4b2-582e7fbcf5b1  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 2.80 GHz.  
The governor "ondemand" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.0

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

### Platform Notes (Continued)

#### 15. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              60
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

```

#### 16. /sys/kernel/mm/transparent\_hugepage

```

defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

#### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

#### 18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

#### 19. Disk information

```

SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem  Type Size Used Avail Use% Mounted on
/dev/sda2   xfs  894G  29G  866G  4% /

```

#### 20. /sys/devices/virtual/dmi/id

```

Vendor:      Lenovo
Product:     ThinkSystem SD550V3 MB
Product Family: ThinkSystem
Serial:      1234567890

```

#### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_base = 14.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Mar-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 5200

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: FNE113F-2.20  
BIOS Date: 01/02/2024  
BIOS Revision: 2.20  
Firmware Revision: 1.10

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base) 657.xz\_s(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 648.exchange2\_s(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.0

ThinkSystem SD550 V3  
(2.80 GHz, Intel Xeon Gold 6526Y)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-21 21:59:39-0500.  
 Report generated on 2024-03-14 10:58:50 by CPU2017 PDF formatter v6716.  
 Originally published on 2024-03-13.