



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Sep-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

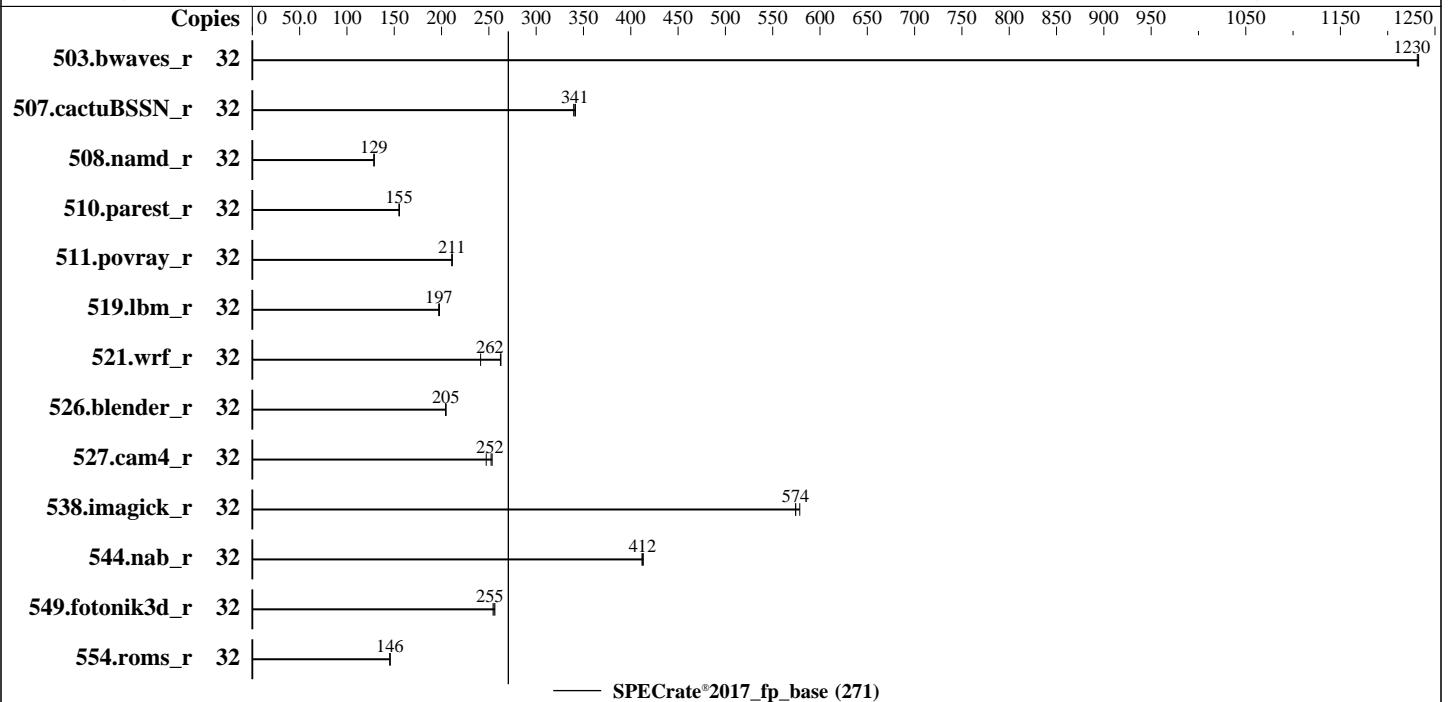

### Hardware

CPU Name: Intel Xeon Gold 6526Y  
 Max MHz: 3900  
 Nominal: 2800  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 37.5 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 01.01.03.16 Released Aug-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Sep-2024  
Hardware Availability: Dec-2023  
Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	260	1230	<b><u>260</u></b>	<b><u>1230</u></b>	261	1230							
507.cactuBSSN_r	32	<b><u>119</u></b>	<b><u>341</u></b>	119	342	119	340							
508.namd_r	32	<b><u>236</u></b>	<b><u>129</u></b>	236	129	236	129							
510.parest_r	32	<b><u>539</u></b>	<b><u>155</u></b>	539	155	539	155							
511.povray_r	32	354	211	<b><u>354</u></b>	<b><u>211</u></b>	354	211							
519.lbm_r	32	171	198	171	197	<b><u>171</u></b>	<b><u>197</u></b>							
521.wrf_r	32	297	241	273	263	<b><u>273</u></b>	<b><u>262</u></b>							
526.blender_r	32	239	204	<b><u>238</u></b>	<b><u>205</u></b>	238	205							
527.cam4_r	32	<b><u>222</u></b>	<b><u>252</u></b>	221	253	226	247							
538.imagick_r	32	<b><u>139</u></b>	<b><u>574</u></b>	139	574	138	579							
544.nab_r	32	<b><u>131</u></b>	<b><u>412</u></b>	131	412	130	413							
549.fotonik3d_r	32	<b><u>488</u></b>	<b><u>255</u></b>	486	256	490	254							
554.roms_r	32	350	145	<b><u>349</u></b>	<b><u>146</u></b>	349	146							

SPECrate®2017\_fp\_base = 271

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-31 selinux=0 audit=0

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Uniautos/cpu2017-2023.2.3/lib/intel64:/home/Uniautos/cpu2017-2023.2.3/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)  
Enable LP [Global] Set to ALL LPs

Sysinfo program /home/Uniautos/cpu2017-2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Sep 16 02:36:07 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9\_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-284.11.1.el9\_2.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
02:36:07 up 9:42, 2 users, load average: 24.20, 30.11, 31.19  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

```
root      tty1      17:46      7:48m  1.00s  0.01s  -bash
root      pts/0     18:44      7:51m  0.00s  0.00s  -bash
```

3. Username  
From environment variable \$USER: root

4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 1028062  
max locked memory (kbytes, -l) 8192  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 1028062  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 31  
login -- root  
-bash  
-bash  
runcpu --define default-platform-flags --copies 32 -c ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg  
--define smt-on --define cores=16 --define physicalfirst --define invoke\_with\_interleave --define  
drop\_caches --tune base -o all fprate  
runcpu --define default-platform-flags --copies 32 --configfile  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base --output\_format all --nopower --runmode  
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.014/templogs/preenv.fprate.014.0.log --lognum 014.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/Uniautos/cpu2017-2023.2.3

6. /proc/cpuinfo  
model name : INTEL(R) XEON(R) GOLD 6526Y  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 207  
stepping : 2  
microcode : 0x21000200  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs eibrs\_pbrsb  
cpu cores : 16  
siblings : 32  
1 physical ids (chips)  
32 processors (hardware threads)  
physical id 0: core ids 0-15  
physical id 0: apicids 0-31  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) GOLD 6526Y
BIOS Model name:      INTEL(R) XEON(R) GOLD 6526Y
CPU family:            6
Model:                 207
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             1
Stepping:              2
BogoMIPS:              5600.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                      ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                      rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                      avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                      cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd
                      dtherm ida arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                      gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                      rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                      serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                      amx_int8 flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             768 KiB (16 instances)
L1i cache:             512 KiB (16 instances)
L2 cache:              32 MiB (16 instances)
L3 cache:              37.5 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):    0-7,16-23
NUMA node1 CPU(s):    8-15,24-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                      sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	37.5M	37.5M	15	Unified	3	40960	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 128078 MB
node 0 free: 119544 MB
node 1 cpus: 8-15,24-31
node 1 size: 128976 MB
node 1 free: 122240 MB
node distances:
node 0 1
0: 10 12
1: 12 10

```

9. /proc/meminfo

MemTotal: 263223792 kB

10. who -r

run-level 3 Sep 15 16:53

11. Systemd service manager version: systemd 252 (252-13.el9\_2)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor
microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd
sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
console-getty cpupower debug-shell dnf-system-upgrade firewalld kvm_stat
man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt4)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=UUID=b814218b-7417-4d8d-8d71-42b27614f608
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=8bba8915-18a1-4853-85d8-c634bb40a72b
nohz_full=1-31

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

```
selinux=0
audit=0
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. tuned-adm active
  Current active profile: throughput-performance
-----
```

```
-----
16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

-----  
20. Disk information  
SPEC is set to: /home/Uniautos/cpu2017-2023.2.3  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda4 xfs 443G 46G 397G 11% /

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: XFUSION  
Product: 2288H V7  
Product Family: Eagle Stream  
Serial: 2106182101X3N8000005

-----  
22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
1x Hynix HMC88AGBRA186N 32 GB 2 rank 5600, configured at 5200  
5x Hynix HMC88AGBRA190N 32 GB 2 rank 5600, configured at 5200  
2x Hynix HMC88AGBRA191N 32 GB 2 rank 5600, configured at 5200

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: XFUSION  
BIOS Version: 01.01.03.16  
BIOS Date: 08/09/2024  
BIOS Revision: 3.16

### Compiler Version Notes

-----  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----  
C++ | 508.namd\_r(base) 510.parest\_r(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----  
C++, C | 511.povray\_r(base) 526.blender\_r(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_fp\_base = 271

FusionServer 2288H V7 (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-15 14:36:06-0400.  
Report generated on 2024-10-09 14:02:10 by CPU2017 PDF formatter v6716.  
Originally published on 2024-10-09.