



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082


Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

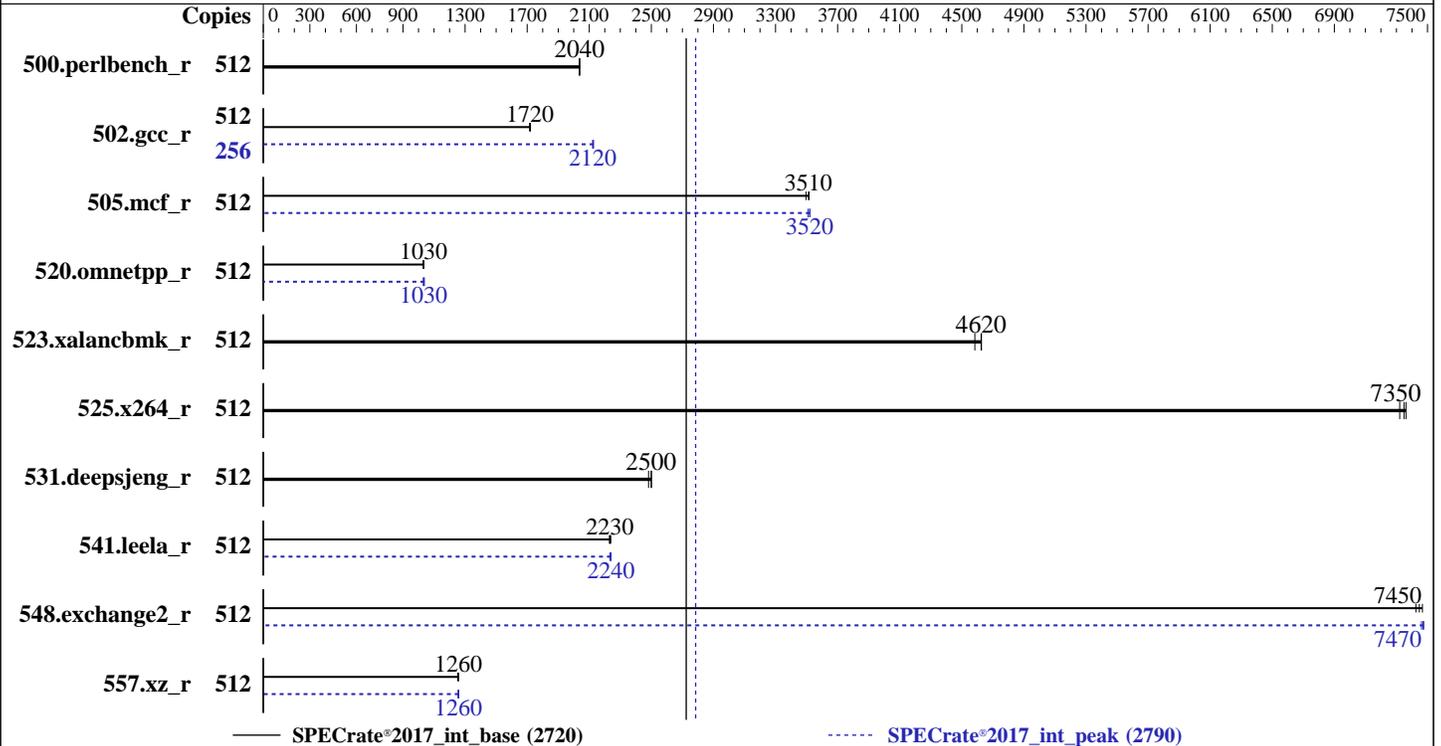

Hardware

CPU Name: AMD EPYC 9755
 Max MHz: 4100
 Nominal: 2700
 Enabled: 256 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 512 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
 Storage: 1 x 3.84TB SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.03 LTS
 5.15.0-119-generic
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version R02_F19 released Sep-2024
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	512	400	2040	400	2040	400	2040	512	400	2040	400	2040	400	2040
502.gcc_r	512	422	1720	423	1720	421	1720	256	171	2120	170	2130	171	2120
505.mcf_r	512	236	3510	237	3500	235	3520	512	236	3510	235	3520	235	3520
520.omnetpp_r	512	650	1030	652	1030	650	1030	512	647	1040	652	1030	650	1030
523.xalancbmk_r	512	117	4630	117	4620	118	4580	512	117	4630	117	4620	118	4580
525.x264_r	512	122	7360	122	7320	122	7350	512	122	7360	122	7320	122	7350
531.deepsjeng_r	512	235	2500	236	2480	235	2500	512	235	2500	236	2480	235	2500
541.leela_r	512	380	2230	380	2230	379	2240	512	379	2240	380	2230	379	2240
548.exchange2_r	512	180	7470	180	7450	181	7430	512	180	7460	180	7470	179	7480
557.xz_r	512	440	1260	442	1250	440	1260	512	439	1260	441	1250	440	1260

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/root/new_RC1298c/amd_rate_aocc500_znver5_A_lib/lib:/root/new_RC1298c/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Power Policy Quick Settings = Best Performance

TDP Control = Manual

TDP = 500

PPT Control = Manual

PPT = 500

SMT Mode = Enabled

Sysinfo program /root/new_RC1298c/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on mz93-fs1 Mon Jan 1 18:58:50 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.9)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Platform Notes (Continued)

```
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux mz93-fs1 5.15.0-119-generic #129-Ubuntu SMP Fri Aug 2 19:25:20 UTC 2024 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
18:58:50 up 15:29, 1 user, load average: 0.07, 0.02, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttyl - 03:31 16.00s 1.34s 0.33s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 6189875
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -f
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.004/templogs/preenv.intrate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /root/new_RC1298c
```

```
6. /proc/cpuinfo
model name : AMD EPYC 9755 128-Core Processor
vendor_id : AuthenticAMD
cpu family : 26
model : 2
stepping : 1
microcode : 0xb002116
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size : 192 4K pages
cpu cores : 128
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Platform Notes (Continued)

siblings : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      512
On-line CPU(s) list:         0-511
Vendor ID:                   AuthenticAMD
Model name:                   AMD EPYC 9755 128-Core Processor
CPU family:                   26
Model:                       2
Thread(s) per core:          2
Core(s) per socket:          128
Socket(s):                    2
Stepping:                     1
Frequency boost:              enabled
CPU max MHz:                  4121.1909
CPU min MHz:                  1500.0000
BogoMIPS:                     5399.77
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                              pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                              rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
                              aperfmperf rapl pni pclmulqdq monitor sse3 fma cx16 pcid sse4_1
                              sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                              cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                              osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                              perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd
                              mba ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1
                              avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx
                              smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl
                              xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                              cqm_mbm_local avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru
                              wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                              vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                              v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
                              avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                              avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b
                              overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d
Virtualization:              AMD-V
L1d cache:                   12 MiB (256 instances)
L1i cache:                   8 MiB (256 instances)
L2 cache:                     256 MiB (256 instances)
L3 cache:                     1 GiB (32 instances)
NUMA node(s):                 32
NUMA node0 CPU(s):           0-7,256-263
NUMA node1 CPU(s):           8-15,264-271
NUMA node2 CPU(s):           16-23,272-279

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Platform Notes (Continued)

```

NUMA node3 CPU(s):          24-31,280-287
NUMA node4 CPU(s):          32-39,288-295
NUMA node5 CPU(s):          40-47,296-303
NUMA node6 CPU(s):          48-55,304-311
NUMA node7 CPU(s):          56-63,312-319
NUMA node8 CPU(s):          64-71,320-327
NUMA node9 CPU(s):          72-79,328-335
NUMA node10 CPU(s):         80-87,336-343
NUMA node11 CPU(s):         88-95,344-351
NUMA node12 CPU(s):         96-103,352-359
NUMA node13 CPU(s):        104-111,360-367
NUMA node14 CPU(s):        112-119,368-375
NUMA node15 CPU(s):        120-127,376-383
NUMA node16 CPU(s):        128-135,384-391
NUMA node17 CPU(s):        136-143,392-399
NUMA node18 CPU(s):        144-151,400-407
NUMA node19 CPU(s):        152-159,408-415
NUMA node20 CPU(s):        160-167,416-423
NUMA node21 CPU(s):        168-175,424-431
NUMA node22 CPU(s):        176-183,432-439
NUMA node23 CPU(s):        184-191,440-447
NUMA node24 CPU(s):        192-199,448-455
NUMA node25 CPU(s):        200-207,456-463
NUMA node26 CPU(s):        208-215,464-471
NUMA node27 CPU(s):        216-223,472-479
NUMA node28 CPU(s):        224-231,480-487
NUMA node29 CPU(s):        232-239,488-495
NUMA node30 CPU(s):        240-247,496-503
NUMA node31 CPU(s):        248-255,504-511
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability Lltf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:           Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 32 nodes (0-31)
node 0 cpus: 0-7,256-263
node 0 size: 47951 MB
node 0 free: 47217 MB
node 1 cpus: 8-15,264-271

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Platform Notes (Continued)

```

node 1 size: 48379 MB
node 1 free: 47743 MB
node 2 cpus: 16-23,272-279
node 2 size: 48379 MB
node 2 free: 47829 MB
node 3 cpus: 24-31,280-287
node 3 size: 48379 MB
node 3 free: 47858 MB
node 4 cpus: 32-39,288-295
node 4 size: 48379 MB
node 4 free: 47860 MB
node 5 cpus: 40-47,296-303
node 5 size: 48379 MB
node 5 free: 47877 MB
node 6 cpus: 48-55,304-311
node 6 size: 48379 MB
node 6 free: 47885 MB
node 7 cpus: 56-63,312-319
node 7 size: 48379 MB
node 7 free: 47884 MB
node 8 cpus: 64-71,320-327
node 8 size: 48379 MB
node 8 free: 47878 MB
node 9 cpus: 72-79,328-335
node 9 size: 48379 MB
node 9 free: 47881 MB
node 10 cpus: 80-87,336-343
node 10 size: 48379 MB
node 10 free: 47879 MB
node 11 cpus: 88-95,344-351
node 11 size: 48379 MB
node 11 free: 47879 MB
node 12 cpus: 96-103,352-359
node 12 size: 48379 MB
node 12 free: 47829 MB
node 13 cpus: 104-111,360-367
node 13 size: 48379 MB
node 13 free: 47885 MB
node 14 cpus: 112-119,368-375
node 14 size: 48379 MB
node 14 free: 47863 MB
node 15 cpus: 120-127,376-383
node 15 size: 48379 MB
node 15 free: 47882 MB
node 16 cpus: 128-135,384-391
node 16 size: 48379 MB
node 16 free: 47836 MB
node 17 cpus: 136-143,392-399
node 17 size: 48379 MB
node 17 free: 47884 MB
node 18 cpus: 144-151,400-407
node 18 size: 48379 MB
node 18 free: 47866 MB
node 19 cpus: 152-159,408-415
node 19 size: 48379 MB
node 19 free: 47886 MB
node 20 cpus: 160-167,416-423
node 20 size: 48377 MB
node 20 free: 47858 MB
node 21 cpus: 168-175,424-431

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Platform Notes (Continued)

```

node 21 size: 48381 MB
node 21 free: 47879 MB
node 22 cpus: 176-183,432-439
node 22 size: 48377 MB
node 22 free: 47859 MB
node 23 cpus: 184-191,440-447
node 23 size: 48381 MB
node 23 free: 47876 MB
node 24 cpus: 192-199,448-455
node 24 size: 48379 MB
node 24 free: 47833 MB
node 25 cpus: 200-207,456-463
node 25 size: 48379 MB
node 25 free: 47872 MB
node 26 cpus: 208-215,464-471
node 26 size: 48332 MB
node 26 free: 47801 MB
node 27 cpus: 216-223,472-479
node 27 size: 48379 MB
node 27 free: 47873 MB
node 28 cpus: 224-231,480-487
node 28 size: 48379 MB
node 28 free: 47875 MB
node 29 cpus: 232-239,488-495
node 29 size: 48379 MB
node 29 free: 47864 MB
node 30 cpus: 240-247,496-503
node 30 size: 48379 MB
node 30 free: 47872 MB
node 31 cpus: 248-255,504-511
node 31 size: 48281 MB
node 31 free: 47770 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
8: 12 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
9: 12 12 12 12 12 12 12 12 12 12 11 10 11 11 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 12 11 11 10 11 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 12 11 11 11 10 12 12 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
12: 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 11 32 32 32 32 32 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Platform Notes (Continued)

```

32 32 32 32 32 32 32 32
13: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32 32
14: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32 32
15: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 11 10 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32 32
16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11 12 12 12 12 12
12 12 12 12 12 12 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11 12 12 12 12 12
12 12 12 12 12 12 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11 12 12 12 12 12
12 12 12 12 12 12 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10 12 12 12 12 12
12 12 12 12 12 12 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 10 11 11 11 12
12 12 12 12 12 12 12 12
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 10 11 11 12
12 12 12 12 12 12 12 12
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 10 11 12
12 12 12 12 12 12 12 12
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 11 10 12
12 12 12 12 12 12 12 12
24: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 10
11 11 11 12 12 12 12 12
25: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11
10 11 11 12 12 12 12 12
26: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11
11 10 11 12 12 12 12 12
27: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11
11 11 10 12 12 12 12 12
28: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12 12 12 10 11 11 11
29: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12 12 12 11 10 11 11
30: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12 12 12 11 11 10 11
31: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12 12 12 11 11 11 10

```

```

-----
9. /proc/meminfo
MemTotal:      1584725108 kB
-----

```

```

-----
10. who -r
run-level 3 Jan 1 03:31
-----

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.9)
Default Target Status
multi-user      degraded
-----

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* fwupd-refresh.service             loaded failed failed Refresh fwupd metadata and update motd
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Platform Notes (Continued)

13. Services, from `systemctl list-unit-files`

```

STATE          UNIT FILES
enabled        ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
                multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
                setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
                unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled        console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync upower
generated       apport openipmi
indirect        uuuid
masked          cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                x11-common

```

14. Linux kernel boot-time arguments, from `/proc/cmdline`

```

BOOT_IMAGE=/boot/vmlinuz-5.15.0-119-generic
root=UUID=1380e2bd-2201-4a69-ae3-09a8eb63e291
ro

```

15. `cpupower frequency-info`

```

analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.70 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2800MHz

```

16. `sysctl`

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage
   defrag          [always] defer defer+madvise madvise never
   enabled         [always] madvise never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs   10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 22.04.3 LTS

```

```

-----
20. Disk information
   SPEC is set to: /root/new_RC1298c
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p2 ext4  3.5T  396G  2.9T  12% /

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:          Giga Computing
   Product:         R183-Z93-LAJ1-000
   Product Family:  Server
   Serial:          01234567890123456789AB

```

```

-----
22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x Samsung M321R8GA0EB2-CCPWC 64 GB 2 rank 6400, configured at 6000

```

```

-----
23. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      GIGABYTE
   BIOS Version:     R02_F19
   BIOS Date:        09/18/2024
   BIOS Revision:    5.35

```

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
=====

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

=====
C      | 502.gcc_r(peak)
=====

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
=====

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

=====
C++    | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
=====

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

=====
Fortran | 548.exchange2_r(base, peak)
=====

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamalloc-ext -ldl

```

C++ benchmarks:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamalloc-ext
-ldl

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flt0
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Peak Portability Flags (Continued)

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbenc_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl
```

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.70 GHz, AMD EPYC 9755)

SPECrate®2017_int_base = 2720

SPECrate®2017_int_peak = 2790

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Aug-2024

Peak Other Flags (Continued)

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.0-Turin.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.0-Turin.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-01 13:58:49-0500.

Report generated on 2024-10-11 12:13:06 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.