



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

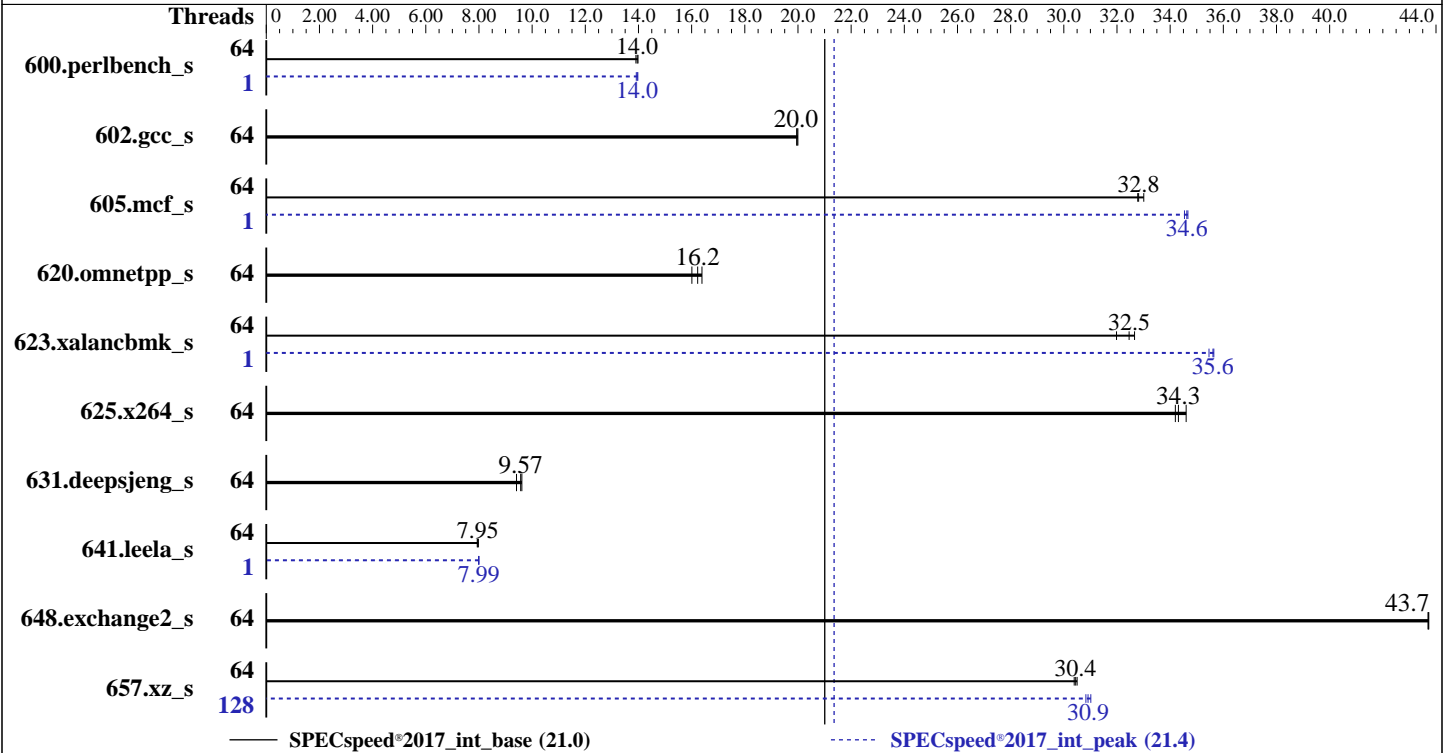

### Hardware

CPU Name: AMD EPYC 9575F  
 Max MHz: 5000  
 Nominal: 3300  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)  
 Storage: 1 x 960GB M.2 SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel version 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version GPE107Z 2.10 released Aug-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	128	13.9	127	14.0	<u>127</u>	<u>14.0</u>	1	128	13.9	127	14.0	<u>127</u>	<u>14.0</u>
602.gcc_s	64	200	20.0	<u>199</u>	<u>20.0</u>	199	20.0	64	200	20.0	<u>199</u>	<u>20.0</u>	199	20.0
605.mcf_s	64	143	33.0	<u>144</u>	<u>32.8</u>	144	32.8	1	137	34.5	<u>136</u>	<u>34.6</u>	136	34.7
620.omnetpp_s	64	102	16.0	<u>101</u>	<u>16.2</u>	99.5	16.4	64	102	16.0	<u>101</u>	<u>16.2</u>	99.5	16.4
623.xalancbmk_s	64	43.4	32.7	<u>43.7</u>	<u>32.5</u>	44.3	32.0	1	<u>39.8</u>	<u>35.6</u>	39.8	35.6	40.0	35.5
625.x264_s	64	51.0	34.6	<u>51.4</u>	<u>34.3</u>	51.6	34.2	64	51.0	34.6	<u>51.4</u>	<u>34.3</u>	51.6	34.2
631.deepsjeng_s	64	<u>150</u>	<u>9.57</u>	149	9.61	152	9.41	64	<u>150</u>	<u>9.57</u>	149	9.61	152	9.41
641.leela_s	64	215	7.94	<u>214</u>	<u>7.95</u>	214	7.98	1	214	7.99	<u>214</u>	<u>7.99</u>	213	8.00
648.exchange2_s	64	67.3	43.7	<u>67.3</u>	<u>43.7</u>	67.2	43.7	64	67.3	43.7	<u>67.3</u>	<u>43.7</u>	67.2	43.7
657.xz_s	64	203	30.4	203	30.5	<u>203</u>	<u>30.4</u>	128	199	31.0	<u>200</u>	<u>30.9</u>	201	30.8

SPECspeed®2017\_int\_base = **21.0**

SPECspeed®2017\_int\_peak = **21.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-
  aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 600.perlbench\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

NUMA Nodes per Socket set to NPS4

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Sep 19 11:42:14 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

### Platform Notes (Continued)

4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
11:42:14 up 3 min, 1 user, load average: 0.03, 0.08, 0.03
USER      TTY      FROM          LOGIN@      IDLE       JCPU      PCPU      WHAT
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094144
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094144
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 21.0

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_peak = 21.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.012/templogs/preenv.intspeerd.012.0.log --lognum 012.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9575F 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002113
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 64
siblings      : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9575F 64-Core Processor
BIOS Model name:       AMD EPYC 9575F 64-Core Processor
BIOS CPU family:       107
CPU family:             26
Model:                  2
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              1
Stepping:               1
BogoMIPS:               6589.64
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtsmp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx fl16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

ibrs ibpb stibp ibrs\_enhanced vmcall fsgsbase tsc\_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnmi avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect flush\_lld debug\_swap

```

Virtualization: AMD-V
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 193108 MB
node 0 free: 192271 MB
node 1 cpus: 16-31,80-95
node 1 size: 193527 MB
node 1 free: 191665 MB
node 2 cpus: 32-47,96-111
node 2 size: 193488 MB
node 2 free: 192839 MB
node 3 cpus: 48-63,112-127
node 3 size: 193437 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```
node 3 free: 192813 MB
node distances:
node  0  1  2  3
 0:  10  12  12  12
 1:  12  10  12  12
 2:  12  12  10  12
 3:  12  12  12  10
```

```
-----
9. /proc/meminfo
MemTotal:      792127944 kB
-----
```

```
10. who -r
run-level 3 Sep 19 11:39
-----
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target  Status
multi-user      running
-----
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wickd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd
generated ntp_sync
indirect systemd-userdbd wickedd
-----
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=d99a79cd-feb0-4de4-b51e-d432d9770c02
splash=silent
mitigations=auto
quiet
security=apparmor
-----
```

```
14. cpupower frequency-info
analyzing CPU 64:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
-----
```

```
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
-----
```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 893G 75G 819G 9% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SD535V3 MB
Product Family: ThinkSystem
Serial:      1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
5x SK Hynix HMC94AHBRA480N 64 GB 2 rank 6400, configured at 6000

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

3x SK Hynix HMC94AHBRA481N 64 GB 2 rank 6400, configured at 6000  
3x SK Hynix HMC94AHBRA486N 64 GB 2 rank 6400, configured at 6000  
1x SK Hynix HMC94AHBRA487N 64 GB 2 rank 6400, configured at 6000

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: GPE107Z-2.10  
BIOS Date: 08/26/2024  
BIOS Revision: 2.10  
Firmware Revision: 3.10

### Compiler Version Notes

-----  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----  
Fortran | 648.exchange2\_s(base, peak)

-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 21.0

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_peak = 21.4

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

602.gcc\_s:basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

625.x264\_s:basepeak = yes

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

620.omnetpp\_s:basepeak = yes

623.xalancbmk\_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s:basepeak = yes

641.leela\_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = 21.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

641.leela\_s (continued):

```
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-18 23:42:14-0400.

Report generated on 2024-10-10 09:52:06 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.