



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

**SPECSpeed®2017\_int\_base = 21.2**

**SPECSpeed®2017\_int\_peak = 21.5**

CPU2017 License: 9017


Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

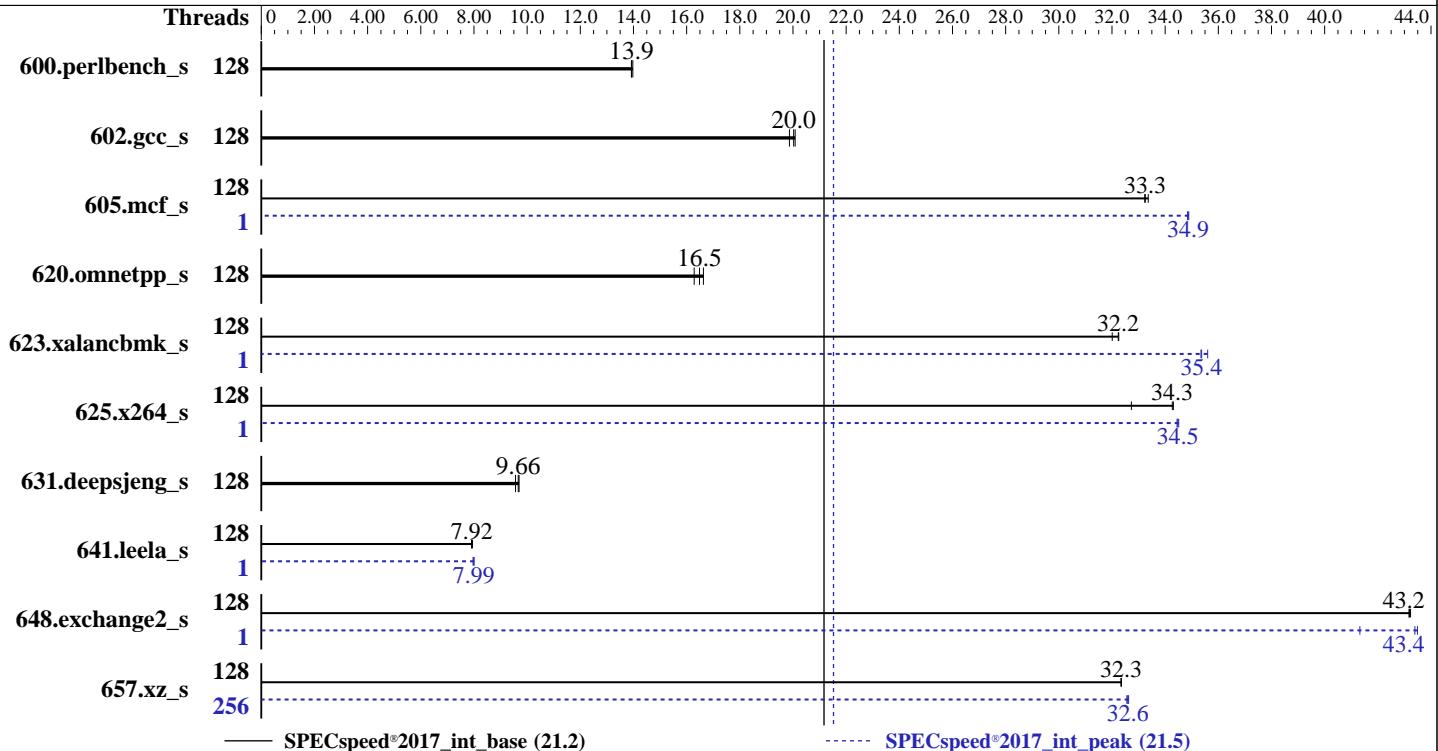

Hardware		Software	
CPU Name:	AMD EPYC 9575F	OS:	Red Hat Enterprise Linux 9.4 (Plow)
Max MHz:	5000		Kernel 5.14.0-427.13.1.el9_4.x86_64
Nominal:	3300	Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Enabled:	128 cores, 2 chips, 2 threads/core	Parallel:	Yes
Orderable:	1,2 chips	Firmware:	Lenovo BIOS Version KAE125W 5.10 released Aug-2024
Cache L1:	32 KB I + 48 KB D on chip per core	File System:	xfs
L2:	1 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)	Other:	None
Storage:	1 x 480 GB SATA SSD	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage
Other:	CPU Cooling: Air		



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

**SPECspeed®2017\_int\_base = 21.2**

**SPECspeed®2017\_int\_peak = 21.5**

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	127	14.0	<u>127</u>	<b>13.9</b>	127	13.9	128	127	14.0	<u>127</u>	<b>13.9</b>	127	13.9
602.gcc_s	128	<b>199</b>	<b>20.0</b>	198	20.1	200	19.9	128	<b>199</b>	<b>20.0</b>	198	20.1	200	19.9
605.mcf_s	128	142	33.4	142	33.2	<u>142</u>	<b>33.3</b>	1	135	34.9	135	34.8	<u>135</u>	<b>34.9</b>
620.omnetpp_s	128	98.1	16.6	<b>98.9</b>	<b>16.5</b>	100	16.3	128	98.1	16.6	<b>98.9</b>	<b>16.5</b>	100	16.3
623.xalancbmk_s	128	<b>44.0</b>	<b>32.2</b>	44.3	32.0	43.9	32.3	1	39.8	35.6	<b>40.1</b>	<b>35.4</b>	40.1	35.3
625.x264_s	128	51.4	34.3	53.9	32.7	<u>51.5</u>	<b>34.3</b>	1	51.1	34.5	<b>51.2</b>	<b>34.5</b>	51.2	34.4
631.deepsjeng_s	128	148	9.70	<u>148</u>	<b>9.66</b>	150	9.56	128	148	9.70	<u>148</u>	<b>9.66</b>	150	9.56
641.leela_s	128	216	7.91	<u>215</u>	<b>7.92</b>	215	7.94	1	214	7.97	213	8.00	<u>213</u>	<b>7.99</b>
648.exchange2_s	128	<b>68.1</b>	<b>43.2</b>	68.1	43.2	68.0	43.2	1	71.1	41.3	<b>67.8</b>	<b>43.4</b>	67.6	43.5
657.xz_s	128	<u>191</u>	<b>32.3</b>	191	32.4	191	32.3	256	189	32.6	<u>190</u>	<b>32.6</b>	190	32.6
<b>SPECspeed®2017_int_base = 21.2</b>														
<b>SPECspeed®2017_int_peak = 21.5</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-255"  
LD_LIBRARY_PATH =  
    "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-  
    aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib32:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "256"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-255"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

NUMA Nodes per Socket set to NPS4

P-State set to Enabled

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Fri Sep 20 18:42:45 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
-----  
1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 252 (252-32.el9_4)  
12. Failed units, from systemctl list-units --state=failed  
13. Services, from systemctl list-unit-files  
14. Linux kernel boot-time arguments, from /proc/cmdline  
15. cpupower frequency-info  
16. tuned-adm active  
17. sysctl  
18. /sys/kernel/mm/transparent_hugepage  
19. /sys/kernel/mm/transparent_hugepage/khugepaged  
20. OS release  
21. Disk information  
22. /sys/devices/virtual/dmi/id  
23. dmidecode  
24. BIOS  
-----
```

```
-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT  
2024 x86_64 x86_64 x86_64 GNU/Linux
```

```
-----  
2. w  
18:42:45 up 2:22, 0 users, load average: 3.48, 5.51, 3.84  
USER TTY LOGIN@ IDLE PCPU WHAT
```

```
-----  
3. Username  
From environment variable $USER: root
```

```
-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 3093995  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 3093995  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.016/templogs/preenv.intspeed.016.0.log --lognum 016.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9575F 64-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 26
model          : 2
stepping        : 1
microcode       : 0xb00210e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 64
siblings         : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 256
On-line CPU(s) list:    0-255
Vendor ID:              AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:              AMD EPYC 9575F 64-Core Processor
BIOS Model name:        AMD EPYC 9575F 64-Core Processor
CPU family:              26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     64
Socket(s):              2
Stepping:                1
Frequency boost:        enabled
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

**SPECspeed®2017\_int\_base = 21.2**

**SPECspeed®2017\_int\_peak = 21.5**

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Oct-2024

## Platform Notes (Continued)

```

CPU(s) scaling MHz: 66%
CPU max MHz: 5008.0068
CPU min MHz: 1500.0000
BogoMIPS: 6590.02
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
       lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
       aperfmpf perf_rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
       x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
       extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
       wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
       cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
       ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2 smep bmi2 erms
       invpcid cq_m rdt_a avx512f avx512dq rdseed adx smap avx512ifma
       clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
       xgetbv1 xsaves cq_m_llc cq_m_occup_llc cq_m_mb_m_total cq_m_mb_m_local
       avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin
       cpc_arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
       decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
       v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfnii vaes
       vpclmulqdq avx512_vnni avx512_bitalg avx512_vpocntdq la57 rdpid
       bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
       avx512_vp2intersect flush_lld debug_swap
Virtualization: AMD-V
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation: usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation: Enhanced / Automatic IBRS, IBPB conditional, STIBP
always-on, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx sync abort: Not affected

```

```

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K      6M   12 Data        1      64          1           64
  L1i     32K      4M    8 Instruction  1      64          1           64
  L2      1M   128M   16 Unified      2    1024          1           64
  L3     32M     512M   16 Unified     3   32768          1           64
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-15,128-143
node 0 size: 96335 MB
node 0 free: 95371 MB
node 1 cpus: 16-31,144-159
node 1 size: 96759 MB
node 1 free: 96163 MB
node 2 cpus: 32-47,160-175
node 2 size: 96759 MB
node 2 free: 96196 MB
node 3 cpus: 48-63,176-191
node 3 size: 96759 MB
node 3 free: 95913 MB
node 4 cpus: 64-79,192-207
node 4 size: 96759 MB
node 4 free: 96333 MB
node 5 cpus: 80-95,208-223
node 5 size: 96759 MB
node 5 free: 96338 MB
node 6 cpus: 96-111,224-239
node 6 size: 96718 MB
node 6 free: 96302 MB
node 7 cpus: 112-127,240-255
node 7 size: 96685 MB
node 7 free: 96269 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  12  12  12  32  32  32  32
  1: 12  10  12  12  32  32  32  32
  2: 12  12  10  12  32  32  32  32
  3: 12  12  12  10  32  32  32  32
  4: 32  32  32  32  10  12  12  12
  5: 32  32  32  32  12  10  12  12
  6: 32  32  32  32  12  12  10  12
  7: 32  32  32  32  12  12  12  10
```

-----

9. /proc/meminfo

```
MemTotal: 792103420 kB
```

-----

10. who -r

```
run-level 3 Sep 20 16:20
```

-----

11. Systemd service manager version: systemd 252 (252-32.el9\_4)

```
Default Target Status
multi-user      degraded
```

-----

12. Failed units, from systemctl list-units --state=failed

```
UNIT          LOAD ACTIVE SUB DESCRIPTION
* dnf-makecache.service loaded failed dnf makecache
```

-----

13. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
crond dbus-broker getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump
libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
nis-domainname nvmefc-boot-connections rhsmcertd rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
tuned udisks2 upower
enabled-runtime
disabled
generated
indirect
systemd-remount-fs
arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd chronyd-restricted console-getty
cpupower debug-shell dnf-system-upgrade firewalld iprdump iprinit iprupdate iscsi-init
iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nftables
nvmf-autoconnect pesign psacct rdisc rhsm rhsm-facts rpmdb-rebuild
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysext
ntp_sync
iscsi sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=UUID=6aa5c6b0-caf3-489a-8878-0e2b78695205
ro
resume=UUID=8ce38437-9a33-4c30-958d-6d80240a76bf
rhgb
quiet

-----
15. cpupower frequency-info
analyzing CPU 61:
    current policy: frequency should be within 1.50 GHz and 3.30 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 14800MHz

-----
16. tuned-adm active
Current active profile: throughput-performance

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
vm.swappiness           1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode        1

-----
18. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                  1
    max_ptes_none           511
    max_ptes_shared          256
    max_ptes_swap            64
    pages_to_scan            4096
    scan_sleep_millisecs     10000

-----
20. OS release
    From /etc/*-release /etc/*-version
    os-release   Red Hat Enterprise Linux 9.4 (Plow)
    redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
    system-release Red Hat Enterprise Linux release 9.4 (Plow)

-----
21. Disk information
    SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda4       xfs   372G  23G  349G  7%  /home

-----
22. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         ThinkSystem SR645 V3 MB,Genoa,DDR5,Oahu,1U
    Product Family:  ThinkSystem
    Serial:          1234567890

-----
23. dmidecode
    Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        24x SK Hynix HMCG88AHBRA292N 32 GB 2 rank 6400, configured at 6000

-----
24. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:          Lenovo
    BIOS Version:         KAE125W-5.10
    BIOS Date:            08/02/2024
    BIOS Revision:        5.10
    Firmware Revision:   53.5
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Compiler Version Notes

```
=====  
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
| 657.xz_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
| 641.leela_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Base Portability Flags (Continued)

641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

625.x264\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Date: Sep-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

625.x264\_s (continued):

```
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

657.xz\_s: Same as 625.x264\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2017\_int\_base = 21.2

SPECspeed®2017\_int\_peak = 21.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2024

Hardware Availability: Nov-2024

Software Availability: Oct-2024

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Turin-A.html>  
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Turin-A.xml>  
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-20 06:42:44-0400.

Report generated on 2024-10-10 09:52:06 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.