



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)


**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

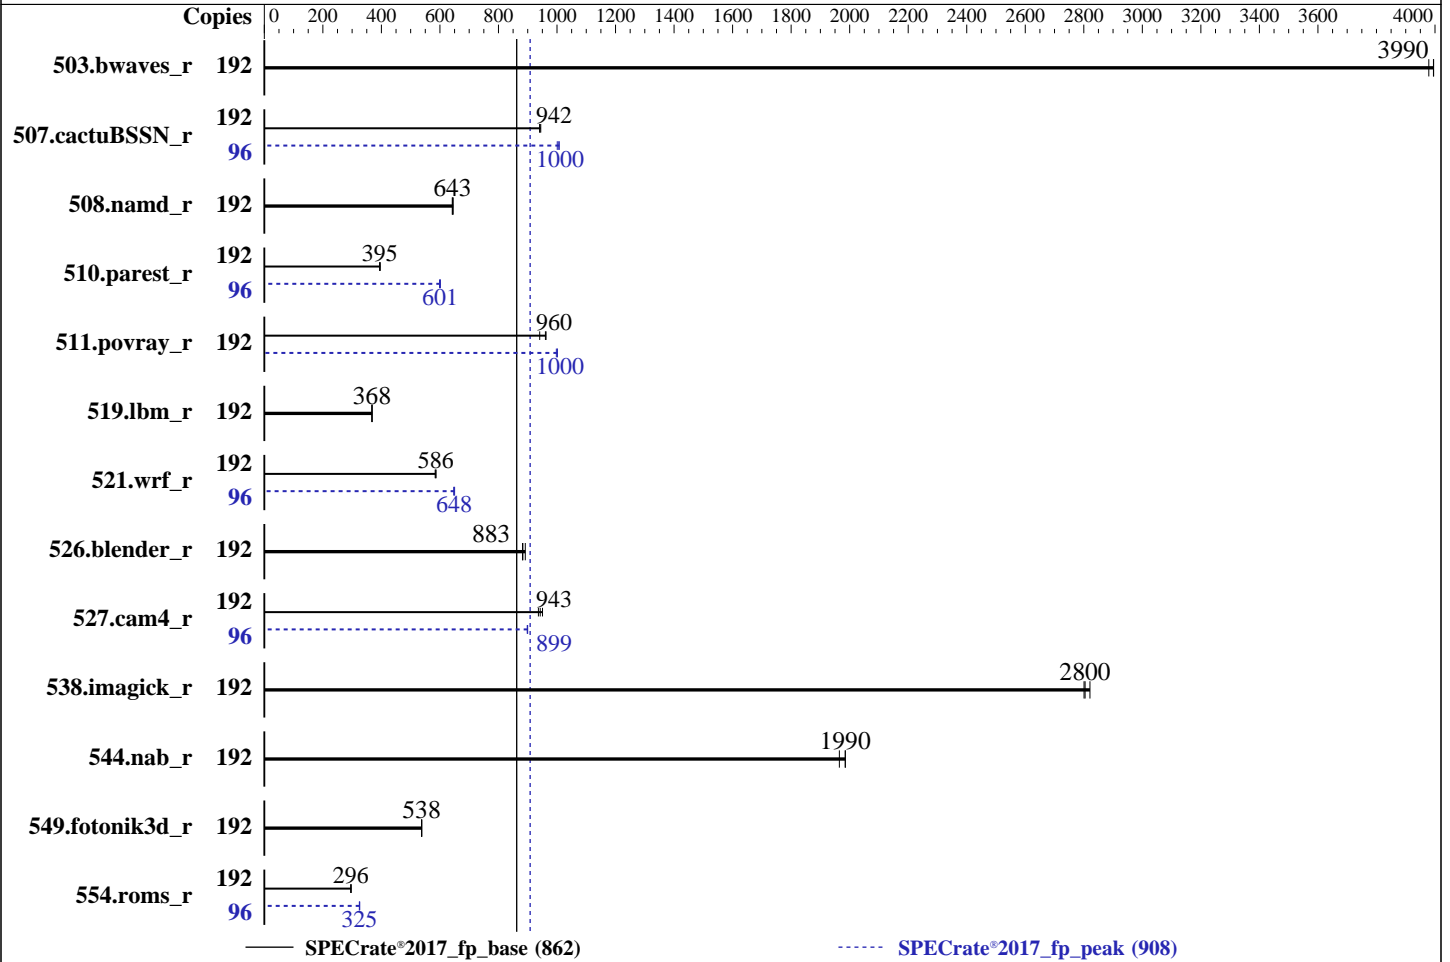

### Hardware

CPU Name: Intel Xeon platinum 8468  
Max MHz: 3800  
Nominal: 2100  
Enabled: 96 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 105 MB I+D on chip per chip  
Other: 5 GB I+D off chip per system board  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800BP-R)  
Storage: 960 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: Ubuntu 22.04.4 LTS  
6.8.0-40-generic  
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Version EG0.10.01 released Mar-2024  
File System: ext4  
System State: Run level 5 (multi user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: Defaults



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor  
(Test Sponsor: Meganet)

SPECrate®2017\_fp\_base = 862

Invento i6000 (Intel Xeon Platinum 8468)

SPECrate®2017\_fp\_peak = 908

CPU2017 License: 6221  
Test Sponsor: Meganet  
Tested by: Fusionstor system

Test Date: Sep-2024  
Hardware Availability: Dec-2022  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	484	3980	<b>482</b>	<b>3990</b>	482	4000	192	484	3980	<b>482</b>	<b>3990</b>	482	4000
507.cactuBSSN_r	192	258	941	257	945	<b>258</b>	<b>942</b>	96	121	1010	<b>121</b>	<b>1000</b>	121	1000
508.namd_r	192	284	642	283	645	<b>284</b>	<b>643</b>	192	284	642	283	645	<b>284</b>	<b>643</b>
510.parest_r	192	<b>1272</b>	<b>395</b>	1276	394	1268	396	96	<b>418</b>	<b>601</b>	418	601	420	599
511.povray_r	192	476	941	<b>467</b>	<b>960</b>	466	963	192	<b>448</b>	<b>1000</b>	448	1000	449	998
519.lbm_r	192	551	368	<b>550</b>	<b>368</b>	550	368	192	551	368	<b>550</b>	<b>368</b>	550	368
521.wrf_r	192	734	586	737	584	<b>734</b>	<b>586</b>	96	332	647	<b>332</b>	<b>648</b>	331	650
526.blender_r	192	331	882	<b>331</b>	<b>883</b>	328	892	192	331	882	<b>331</b>	<b>883</b>	328	892
527.cam4_r	192	359	936	<b>356</b>	<b>943</b>	353	951	96	<b>187</b>	<b>899</b>	187	900	187	898
538.imagick_r	192	170	2800	169	2820	<b>170</b>	<b>2800</b>	192	170	2800	169	2820	<b>170</b>	<b>2800</b>
544.nab_r	192	<b>163</b>	<b>1990</b>	164	1960	163	1990	192	<b>163</b>	<b>1990</b>	164	1960	163	1990
549.fotonik3d_r	192	<b>1392</b>	<b>538</b>	1391	538	1392	537	192	<b>1392</b>	<b>538</b>	1391	538	1392	537
554.roms_r	192	<b>1032</b>	<b>296</b>	1032	296	1028	297	96	<b>469</b>	<b>325</b>	470	325	468	326

SPECrate®2017\_fp\_base = 862

SPECrate®2017\_fp\_peak = 908

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on intel Mon Sep 23 21:31:32 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

1. uname -a
Linux intel 6.8.0-40-generic #40~22.04.3-Ubuntu SMP PREEMPT_DYNAMIC Tue Jul 30 17:30:19 UTC 2 x86_64 x86_64
x86_64 GNU/Linux

```

```

2. w
 21:31:32 up  8:22,  2 users,  load average: 99.60, 166.92, 181.25
USER   TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
intel  :1      :1            13:09   ?xdm?  1:17m  0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
intel pts/1    -            14:54   6:36m  1.02s  0.01s sudo
./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh

```

```

3. Username
From environment variable $USER:  root
From the command 'logname':      intel

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 132055216
process                4126421
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

```

-----
5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=96 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0005c0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 48
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       192
On-line CPU(s) list:         0-191
Vendor ID:                    GenuineIntel
Model name:                   Intel(R) Xeon(R) Platinum 8468
CPU family:                   6
Model:                        143
Thread(s) per core:          2
Core(s) per socket:          48
Socket(s):                   2
Stepping:                     8
CPU max MHz:                  3800.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4200.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                               pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                               xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                               cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                               ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                               tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                               avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                               sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                               cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                               user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi
                               avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                               avx512_vnni avx512_bitalg tme avx512_vppopcntdq la57 rdpid
                               bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                               serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                               amx_int8 flush_lld arch_capabilities

Virtualization:               VT-x
L1d cache:                    4.5 MiB (96 instances)
L1i cache:                    3 MiB (96 instances)
L2 cache:                     192 MiB (96 instances)
L3 cache:                     210 MiB (2 instances)
NUMA node(s):                 8
NUMA node0 CPU(s):            0-11,96-107
NUMA node1 CPU(s):            12-23,108-119
NUMA node2 CPU(s):            24-35,120-131
NUMA node3 CPU(s):            36-47,132-143
NUMA node4 CPU(s):            48-59,144-155
NUMA node5 CPU(s):            60-71,156-167
NUMA node6 CPU(s):            72-83,168-179
NUMA node7 CPU(s):            84-95,180-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

Vulnerability Srbds:  
Vulnerability Tsx async abort:

PBR SB-eIBRS SW sequence; BHI BHI\_DIS\_S  
Not affected  
Not affected

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 128622 MB
node 0 free: 114252 MB
node 1 cpus: 12-23,108-119
node 1 size: 129015 MB
node 1 free: 117998 MB
node 2 cpus: 24-35,120-131
node 2 size: 129015 MB
node 2 free: 118451 MB
node 3 cpus: 36-47,132-143
node 3 size: 129015 MB
node 3 free: 118157 MB
node 4 cpus: 48-59,144-155
node 4 size: 129015 MB
node 4 free: 118515 MB
node 5 cpus: 60-71,156-167
node 5 size: 128972 MB
node 5 free: 118075 MB
node 6 cpus: 72-83,168-179
node 6 size: 129015 MB
node 6 free: 118314 MB
node 7 cpus: 84-95,180-191
node 7 size: 129007 MB
node 7 free: 118379 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. `/proc/meminfo`

MemTotal: 1056441740 kB

10. `who -r`

run-level 5 Sep 23 13:10

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

Default Target Status  
graphical degraded

### 12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

### 13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oom systemd-pstore systemd-resolved systemd-timesyncd teamviewerd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	apport cpufrequtils loadcpufreq speech-dispatcher
indirect	saned@ spice-vdagentd uidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned screen-cleanup sudo systemd-rfkill x11-common

### 14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-40-generic
root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
ro
quiet
splash
vt.handoff=7
```

### 15. cpupower frequency-info

```
analyzing CPU 6:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

### 16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.4 LTS

```

```

-----
20. Disk information
SPEC is set to: /home/speccpu/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2  ext4 879G 676G 159G 82% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      Fusionstor
Product:     Invento_i6000
Product Family: SG_Intel_EagleStream
Serial:      HQ3110001BDA03CD0002

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 16x NO DIMM NO DIMM
 16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

BIOS Version: EG0.10.01  
BIOS Date: 03/22/2024  
BIOS Revision: 5.32

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECrate®2017\_fp\_base = 862

**Invento i6000 (Intel Xeon Platinum 8468)**

SPECrate®2017\_fp\_peak = 908

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor  
(Test Sponsor: Meganet)

SPECrate®2017\_fp\_base = 862

Invento i6000 (Intel Xeon Platinum 8468)

SPECrate®2017\_fp\_peak = 908

CPU2017 License: 6221  
Test Sponsor: Meganet  
Tested by: Fusionstor system

Test Date: Sep-2024  
Hardware Availability: Dec-2022  
Software Availability: Dec-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_fp\_base = 862**

**Invento i6000 (Intel Xeon Platinum 8468)**

**SPECrate®2017\_fp\_peak = 908**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-23 12:01:32-0400.

Report generated on 2024-10-09 14:05:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.