



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)


**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

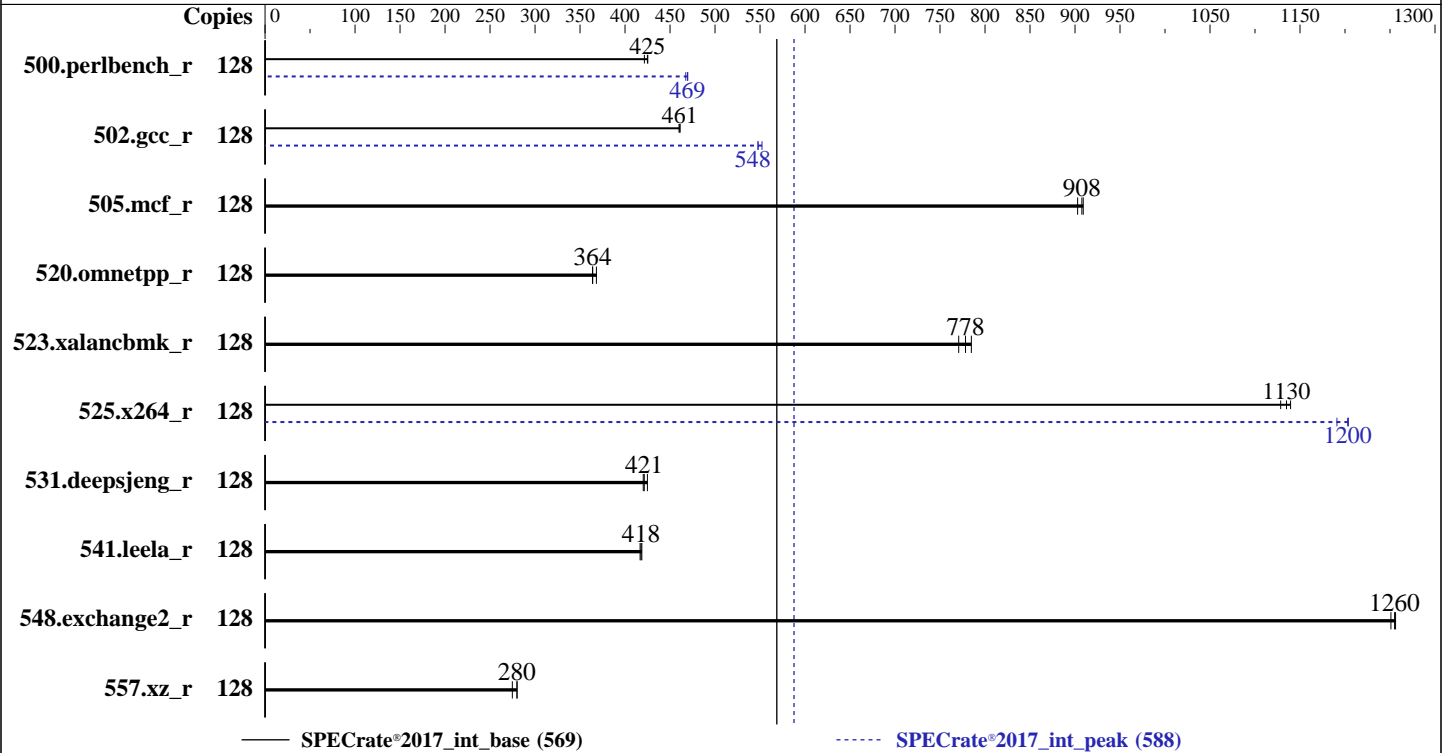

## Hardware

CPU Name: Intel Xeon Gold 6448H  
Max MHz: 4100  
Nominal: 2400  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 60 MB I+D on chip per chip  
Other: 5 GB I+D off chip per system board  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800BP-R)  
Storage: 960 GB SATA SSD  
Other: CPU Cooling: Air

## Software

OS: Ubuntu 22.04.4 LTS  
6.8.0-40-generic  
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Version EG0.10.01 released Mar-2024  
File System: ext4  
System State: Run level 5 (multi user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: Defaults



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor  
(Test Sponsor: Meganet)

SPECrate®2017\_int\_base = 569

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017\_int\_peak = 588

CPU2017 License: 6221  
Test Sponsor: Meganet  
Tested by: Fusionstor system

Test Date: Sep-2024  
Hardware Availability: Dec-2022  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	479	425	<b>480</b>	<b>425</b>	483	422	128	436	467	434	470	<b>434</b>	<b>469</b>
502.gcc_r	128	394	460	393	461	<b>393</b>	<b>461</b>	128	<b>331</b>	<b>548</b>	328	552	331	548
505.mcf_r	128	228	909	<b>228</b>	<b>908</b>	229	903	128	228	909	<b>228</b>	<b>908</b>	229	903
520.omnetpp_r	128	456	368	<b>461</b>	<b>364</b>	462	364	128	456	368	<b>461</b>	<b>364</b>	462	364
523.xalancbmk_r	128	175	771	172	785	<b>174</b>	<b>778</b>	128	175	771	172	785	<b>174</b>	<b>778</b>
525.x264_r	128	199	1130	<b>197</b>	<b>1130</b>	197	1140	128	186	1200	<b>186</b>	<b>1200</b>	188	1190
531.deepsjeng_r	128	345	425	<b>348</b>	<b>421</b>	349	420	128	345	425	<b>348</b>	<b>421</b>	349	420
541.leela_r	128	509	417	506	419	<b>507</b>	<b>418</b>	128	509	417	506	419	<b>507</b>	<b>418</b>
548.exchange2_r	128	267	1260	<b>267</b>	<b>1260</b>	268	1250	128	267	1260	<b>267</b>	<b>1260</b>	268	1250
557.xz_r	128	503	275	494	280	<b>494</b>	<b>280</b>	128	503	275	494	280	<b>494</b>	<b>280</b>

SPECrate®2017\_int\_base = 569

SPECrate®2017\_int\_peak = 588

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
"/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/lib/ia32:/home/speccpu/cpu2017/je5.0.1-32"  
MALLOCONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on intel Fri Sep 20 11:40:28 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux intel 6.8.0-40-generic #40~22.04.3-Ubuntu SMP PREEMPT_DYNAMIC Tue Jul 30 17:30:19 UTC 2 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
11:40:28 up 19:14,  2 users,  load average: 0.11, 0.07, 0.10
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
intel    :1      :1              Thu16   ?xdm?  51:43   0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
intel    pts/1    -                11:40   3.00s  0.98s  0.03s sudo
./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      intel
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

coredump(blocks)      0
memory(kbytes)        unlimited
locked memory(kbytes) 132058120
process                4126512
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0

```

```

-----
5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6448H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0005c0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Gold 6448H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 8
CPU max MHz: 4100.0000
CPU min MHz: 800.0000
BogoMIPS: 4800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_13 cat_12 cdp_13 intel_ppin cdp_12 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fpl6 amx_tile
amx_int8 flush_l1d arch_capabilities

Virtualization: VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 3M 12 Data 1 64 1 64
L1i 32K 2M 8 Instruction 1 64 1 64
L2 2M 128M 16 Unified 2 2048 1 64

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

L3 60M 120M 15 Unified 3 65536 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 257600 MB
node 0 free: 239315 MB
node 1 cpus: 16-31,80-95
node 1 size: 258036 MB
node 1 free: 242467 MB
node 2 cpus: 32-47,96-111
node 2 size: 258036 MB
node 2 free: 242536 MB
node 3 cpus: 48-63,112-127
node 3 size: 258029 MB
node 3 free: 243201 MB
node distances:
node  0  1  2  3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10
```

9. /proc/meminfo

MemTotal: 1056464972 kB

10. who -r

run-level 5 Sep 19 16:26

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

```
Default Target Status
graphical degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT                                LOAD ACTIVE SUB    DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online
```

13. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oom systemd-pstore
systemd-resolved systemd-timesyncd teamviewerd thermald ua-reboot-cmds ubuntu-advantage
udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@
rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext
systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@
generated apport cpufrequtils loadcpufreq speech-dispatcher
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECrate®2017\_int\_base = 569

**Invento i6000 (Intel Xeon Gold 6448H)**

SPECrate®2017\_int\_peak = 588

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```
indirect      saned@ spice-vdagentd uidd
masked        alsu-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
              screen-cleanup sudo systemd-rfkill x11-common
```

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-40-generic
root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
ro
quiet
splash
vt.handoff=7
-----
```

```
-----
15. cpupower frequency-info
analyzing CPU 103:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

scan\_sleep\_millisecs 10000

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 22.04.4 LTS  
-----

20. Disk information  
SPEC is set to: /home/speccpu/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 ext4 879G 678G 157G 82% /  
-----

21. /sys/devices/virtual/dmi/id  
Vendor: Fusionstor  
Product: Invento\_i6000  
Product Family: SG\_Intel\_EagleStream  
Serial: HQ3110001BDA03CD0002  
-----

22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x NO DIMM NO DIMM  
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800  
-----

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: EG0.10.01  
BIOS Date: 03/22/2024  
BIOS Revision: 5.32  
-----

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Base Portability Flags (Continued)

548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

**SPECrate®2017\_int\_base = 569**

**Invento i6000 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_int\_peak = 588**

**CPU2017 License:** 6221  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Sep-2024  
**Hardware Availability:** Dec-2022  
**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-20 02:10:28-0400.

Report generated on 2024-10-09 14:04:58 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.