



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.
 (Test Sponsor: Giga Computing Technology Co., Ltd.)
R183-Z93-LAJ1-000
 (2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082


Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

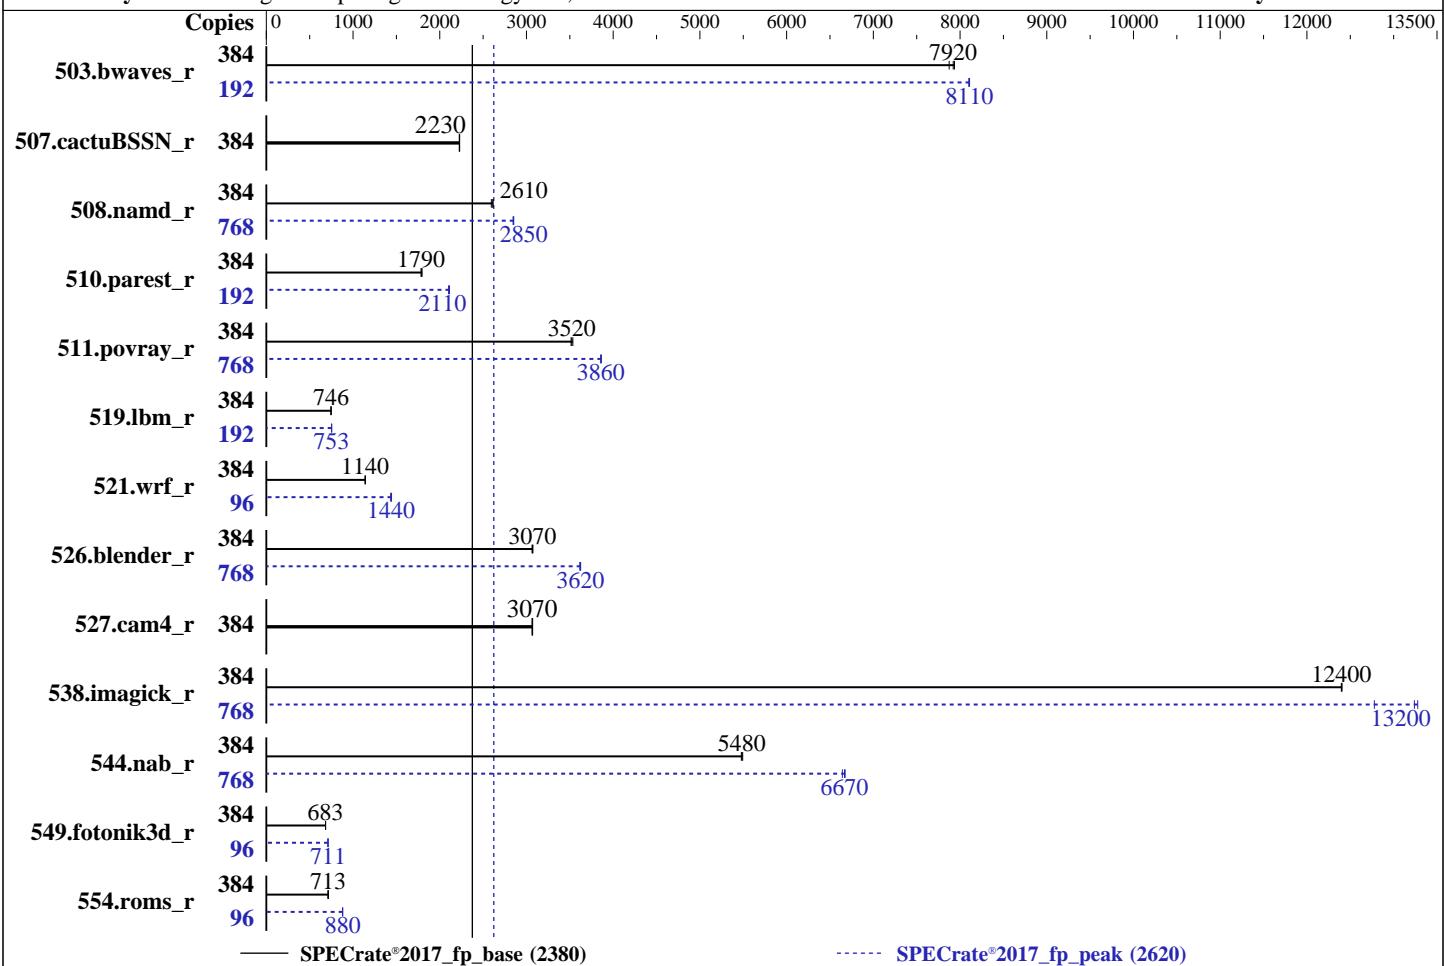

— SPECrate®2017_fp_base (2380)

----- SPECrate®2017_fp_peak (2620)

Hardware

CPU Name: AMD EPYC 9965
 Max MHz: 3700
 Nominal: 2250
 Enabled: 384 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 16 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
 Storage: 1 x 3.5TB SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.05 LTS
 Compiler: 5.15.0-122-generic
 C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version R02_F19 released Sep-2024
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	489	7870	485	7940	486	7920	192	237	8110	238	8100	237	8110
507.cactuBSSN_r	384	218	2230	218	2230	218	2230	384	218	2230	218	2230	218	2230
508.namd_r	384	141	2590	140	2610	140	2610	768	256	2850	256	2850	256	2850
510.parest_r	384	562	1790	559	1800	563	1790	192	239	2100	238	2110	238	2110
511.povray_r	384	255	3510	255	3520	254	3530	768	465	3860	464	3860	465	3860
519.lbm_r	384	542	746	543	746	542	747	192	269	753	268	754	269	751
521.wrf_r	384	754	1140	754	1140	754	1140	96	149	1440	150	1430	149	1440
526.blender_r	384	191	3070	190	3070	191	3070	768	323	3630	324	3610	323	3620
527.cam4_r	384	219	3070	219	3070	219	3070	384	219	3070	219	3070	219	3070
538.imagick_r	384	77.0	12400	77.0	12400	77.0	12400	768	149	12800	144	13200	144	13300
544.nab_r	384	118	5490	118	5480	118	5480	768	195	6640	194	6670	194	6670
549.fotonik3d_r	384	2192	683	2192	683	2189	684	96	526	711	526	711	526	711
554.roms_r	384	855	714	856	712	856	713	96	174	879	173	880	173	880

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/root/cpu2017_J/amd_rate_aocc500_znver5_A_lib/lib:/root/cpu2017_J/amd_rate_aocc500_znver5_A_lib/lib32
    :"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:
Power Policy Quick Settings = Best Performance
TDP Control = Manual
TDP = 500
PPT Control = Manual
PPT = 500
SMT Mode = Enabled

```
Sysinfo program /root/cpu2017_J/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on mz43-g20 Tue Jan 2 03:19:43 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```
21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS
```

```
-----  
1. uname -a  
Linux mz43-g20 5.15.0-122-generic #132-Ubuntu SMP Thu Aug 29 13:45:52 UTC 2024 x86_64 x86_64 x86_64  
GNU/Linux
```

```
-----  
2. w  
03:19:43 up 1:11, 3 users, load average: 0.30, 0.11, 0.04  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttys1 - 02:10 50:37 0.01s 0.01s -bash  
test pts/0 10.1.116.144 02:25 54:19 0.06s 0.01s sshd: test [priv]  
test pts/1 10.1.116.144 02:25 31.00s 1.71s 0.06s sudo -i
```

```
-----  
3. Username  
From environment variable $USER: root  
From the command 'logname': test
```

```
-----  
4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 6189535  
nofiles 1024  
vmmemory(kbytes) unlimited  
locks unlimited  
rtprio 0
```

```
-----  
5. sysinfo process ancestry  
/sbin/init  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: test [priv]  
sshd: test@pts/0  
-bash  
sudo -i  
sudo -i  
-bash  
python3 ./run_amd_rate_aocc500_znver5_A1.py  
/bin/bash ./amd_rate_aocc500_znver5_A1.sh  
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate  
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /root/cpu2017_J
```

```
-----  
6. /proc/cpuinfo  
model name : AMD EPYC 9965 192-Core Processor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```
vendor_id      : AuthenticAMD
cpu family    : 26
model         : 17
stepping       : 0
microcode     : 0xb101021
bugs          : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 192
siblings       : 384
2 physical ids (chips)
768 processors (hardware threads)
physical id 0: core ids 0-191
physical id 1: core ids 0-191
physical id 0: apicids 0-383
physical id 1: apicids 512-895
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                768
On-line CPU(s) list:  0-767
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9965 192-Core Processor
CPU family:            26
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   192
Socket(s):            2
Stepping:              0
Frequency boost:      enabled
CPU max MHz:          3700.1951
CPU min MHz:          1500.0000
BogoMIPS:              4500.21
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                      pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                      rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
                      aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1
                      sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                      osvw ibs skininit wdt tce topoext perfctr_core perfctr_nb bpext
                      perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd
                      mba ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1
                      avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx
                      smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occur_llc cqmq_mbmi_total
                      cqmq_mbmi_local avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru
                      wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale
                      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                      v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi umip pku ospte
                      avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitual
                      avx512_vpocndq la57 rdpid bus_lock_detect movdiri movdir64b
                      overflow_recov succor smca fsrm avx512_vp2intersect flush_lld
Virtualization:        AMD-V
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

L1d cache:	18 MiB (384 instances)
L1i cache:	12 MiB (384 instances)
L2 cache:	384 MiB (384 instances)
L3 cache:	768 MiB (24 instances)
NUMA node(s):	24
NUMA node0 CPU(s):	0-15, 384-399
NUMA node1 CPU(s):	16-31, 400-415
NUMA node2 CPU(s):	32-47, 416-431
NUMA node3 CPU(s):	48-63, 432-447
NUMA node4 CPU(s):	64-79, 448-463
NUMA node5 CPU(s):	80-95, 464-479
NUMA node6 CPU(s):	96-111, 480-495
NUMA node7 CPU(s):	112-127, 496-511
NUMA node8 CPU(s):	128-143, 512-527
NUMA node9 CPU(s):	144-159, 528-543
NUMA node10 CPU(s):	160-175, 544-559
NUMA node11 CPU(s):	176-191, 560-575
NUMA node12 CPU(s):	192-207, 576-591
NUMA node13 CPU(s):	208-223, 592-607
NUMA node14 CPU(s):	224-239, 608-623
NUMA node15 CPU(s):	240-255, 624-639
NUMA node16 CPU(s):	256-271, 640-655
NUMA node17 CPU(s):	272-287, 656-671
NUMA node18 CPU(s):	288-303, 672-687
NUMA node19 CPU(s):	304-319, 688-703
NUMA node20 CPU(s):	320-335, 704-719
NUMA node21 CPU(s):	336-351, 720-735
NUMA node22 CPU(s):	352-367, 736-751
NUMA node23 CPU(s):	368-383, 752-767
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	18M	12	Data	1	64	1	64
L1i	32K	12M	8	Instruction	1	64	1	64
L2	1M	384M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 24 nodes (0-23)

node 0 cpus: 0-15,384-399

node 0 size: 64064 MB

node 0 free: 63474 MB

node 1 cpus: 16-31,400-415

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 1 size: 64504 MB
node 1 free: 63846 MB
node 2 cpus: 32-47,416-431
node 2 size: 64504 MB
node 2 free: 64103 MB
node 3 cpus: 48-63,432-447
node 3 size: 64504 MB
node 3 free: 63988 MB
node 4 cpus: 64-79,448-463
node 4 size: 64504 MB
node 4 free: 63847 MB
node 5 cpus: 80-95,464-479
node 5 size: 64504 MB
node 5 free: 63959 MB
node 6 cpus: 96-111,480-495
node 6 size: 64504 MB
node 6 free: 64155 MB
node 7 cpus: 112-127,496-511
node 7 size: 64504 MB
node 7 free: 64137 MB
node 8 cpus: 128-143,512-527
node 8 size: 64504 MB
node 8 free: 64097 MB
node 9 cpus: 144-159,528-543
node 9 size: 64504 MB
node 9 free: 64113 MB
node 10 cpus: 160-175,544-559
node 10 size: 64504 MB
node 10 free: 64086 MB
node 11 cpus: 176-191,560-575
node 11 size: 64504 MB
node 11 free: 64141 MB
node 12 cpus: 192-207,576-591
node 12 size: 64504 MB
node 12 free: 64218 MB
node 13 cpus: 208-223,592-607
node 13 size: 64504 MB
node 13 free: 64233 MB
node 14 cpus: 224-239,608-623
node 14 size: 64504 MB
node 14 free: 64233 MB
node 15 cpus: 240-255,624-639
node 15 size: 64504 MB
node 15 free: 64232 MB
node 16 cpus: 256-271,640-655
node 16 size: 64504 MB
node 16 free: 64228 MB
node 17 cpus: 272-287,656-671
node 17 size: 64504 MB
node 17 free: 64235 MB
node 18 cpus: 288-303,672-687
node 18 size: 64504 MB
node 18 free: 64235 MB
node 19 cpus: 304-319,688-703
node 19 size: 64504 MB
node 19 free: 64234 MB
node 20 cpus: 320-335,704-719
node 20 size: 64504 MB
node 20 free: 64235 MB
node 21 cpus: 336-351,720-735
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```

node 21 size: 64504 MB
node 21 free: 64207 MB
node 22 cpus: 352-367,736-751
node 22 size: 64456 MB
node 22 free: 64171 MB
node 23 cpus: 368-383,752-767
node 23 size: 64386 MB
node 23 free: 64114 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
 0: 10 11 11 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 1: 11 10 11 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 2: 11 11 10 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 3: 12 12 12 10 11 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 4: 12 12 12 11 10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 5: 12 12 12 11 11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 6: 12 12 12 12 12 12 12 10 11 11 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 7: 12 12 12 12 12 12 11 10 11 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 8: 12 12 12 12 12 12 11 11 10 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32
 9: 12 12 12 12 12 12 12 12 12 10 11 11 32 32 32 32 32 32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 11 10 11 32 32 32 32 32 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32 32 32 32 32 32 32 32 32
12: 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 12 12 12 12 12 12 12 12
13: 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 12 12 12 12 12 12 12 12
14: 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 12 12 12 12 12 12 12 12
15: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 10 11 11 12 12 12 12
16: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 10 11 12 12 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 11 11 10 12 12 12 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11 11 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10 11 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 11 10 12 12
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 12 10 11
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 11 10 11
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 11 11 10

```

9. /proc/meminfo
MemTotal: 1584632156 kB

10. who -r
run-level 5 Jan 2 02:10

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```
setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades vauth
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated apport openipmi
indirect uid
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-122-generic
root=UUID=47834d90-08a4-46b4-873c-9fa419c95684
ro

-----
15. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 38800MHz

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvice never
enabled          [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS

20. Disk information
SPEC is set to: /root/cpu2017_J
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 ext4 3.5T 67G 3.2T 2% /

21. /sys/devices/virtual/dmi/id
Vendor: Giga Computing
Product: R183-Z93-LAJ1-000
Product Family: Server
Serial: 01234567890123456789AB

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
9x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000
3x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000
12x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400, configured at 6000

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: GIGABYTE
BIOS Version: R02_F19
BIOS Date: 09/18/2024
BIOS Revision: 5.35

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

```
=====
C++           | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----


=====
C++, C        | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----


=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----


=====
Fortran       | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----


=====
Fortran, C     | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.llbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIB -ffast-math -fno-PIE -no-pie -flio
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdaloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdaloc -lflang -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fsto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -fsto -Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm  
-lamdalloc -ldl -lflang
```

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

521.wrf_r (continued):

```
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm  
-lamdalloc -ldl
```

526.blender_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactusBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R183-Z93-LAJ1-000

(2.25 GHz, AMD EPYC 9965)

SPECrate®2017_fp_base = 2380

SPECrate®2017_fp_peak = 2620

CPU2017 License: 9082

Test Date: Oct-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Oct-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Oct-2024

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.0-Turin.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.0-Turin.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-01 22:19:42-0500.

Report generated on 2024-10-24 09:14:10 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-24.