



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Jun-2025

Software Availability: Apr-2024

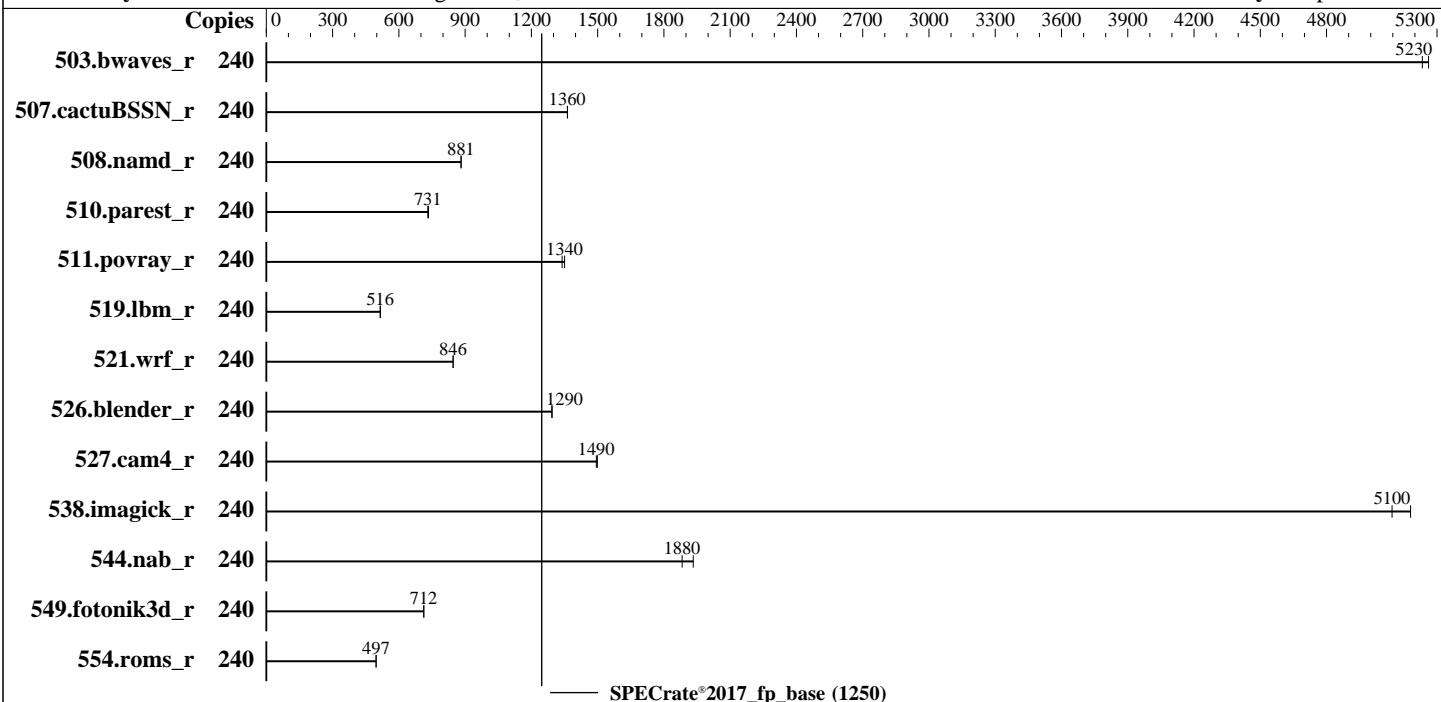

Hardware

CPU Name: Intel Xeon 6979P
 Max MHz: 3900
 Nominal: 2100
 Enabled: 120 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 504 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-11200B-R, running at 8800)
 Storage: 1 x 3.84 TB NVME SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
 Compiler: 5.14.0-427.13.1.el9_4.x86_64
 C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 7.10.01P91 released Sep-2024 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	240	457	5260	460	5230											
507.cactusBSSN_r	240	223	1360	223	1360											
508.namd_r	240	259	881	259	882											
510.parest_r	240	855	734	859	731											
511.povray_r	240	418	1340	415	1350											
519.lbm_r	240	491	516	490	516											
521.wrf_r	240	636	846	636	846											
526.blender_r	240	283	1290	282	1290											
527.cam4_r	240	281	1490	280	1500											
538.imagick_r	240	115	5180	117	5100											
544.nab_r	240	215	1880	209	1930											
549.fotonik3d_r	240	1311	713	1313	712											
554.roms_r	240	767	497	767	497											

SPECrate®2017_fp_base = 1250

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

LLC dead line alloc = Disabled
Power Performance Tuning = BIOS Controls EPPB
ENERGY_PERF_BIAS_CFG mode = Performance

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Oct 7 17:14:32 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-32.el9_4)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
17:14:32 up 2:15, 3 users, load average: 0.10, 49.99, 143.55
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 15:00 2:14m 0.00s 0.00s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Platform Notes (Continued)

```
root      pts/0      15:00   22.00s  0.97s  0.00s sh intrate.sh
root      pts/1      15:38   41:34   0.05s  0.05s -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3092092
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3092092
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
sh intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcores=120 --define
  physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base -o all fprate
  -n 2
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcores=120 --define
  physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base
  --output_format all --iterations 2 --nopower --runmode rate --tune base --size refrate fprate --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.027/templogs/preenv.fprate.027.0.log --lognum 027.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6979P
vendor_id       : GenuineIntel
cpu family     : 6
model          : 173
stepping        : 1
microcode       : 0x810002e0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 120
siblings        : 240
1 physical ids (chips)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Platform Notes (Continued)

```
240 processors (hardware threads)
physical id 0: core ids 0-39,64-103,128-167
physical id 0: apicids 0-79,128-207,256-335
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	240
On-line CPU(s) list:	0-239
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6979P
BIOS Model name:	Intel(R) Xeon(R) 6979P
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	120
Socket(s):	1
Stepping:	1
CPU(s) scaling MHz:	82%
CPU max MHz:	3900.0000
CPU min MHz:	800.0000
BogoMIPS:	4200.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpref tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba ibrs stibp ibrs_enhanced tpr_shadow flexpriority ept vpid_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavenc xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospe waitpkg avx512_vbmi2 gfnii vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopsndq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	5.6 MiB (120 instances)
L1i cache:	7.5 MiB (120 instances)
L2 cache:	240 MiB (120 instances)
L3 cache:	504 MiB (1 instance)
NUMA node(s):	3
NUMA node0 CPU(s):	0-39,120-159
NUMA node1 CPU(s):	40-79,160-199
NUMA node2 CPU(s):	80-119,200-239
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Platform Notes (Continued)

Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	64K	7.5M	16	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	504M	504M	16	Unified	3	516096	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 3 nodes (0-2)
node 0 cpus: 0-39,120-159
node 0 size: 257087 MB
node 0 free: 238526 MB
node 1 cpus: 40-79,160-199
node 1 size: 257986 MB
node 1 free: 241956 MB
node 2 cpus: 80-119,200-239
node 2 size: 258012 MB
node 2 free: 241223 MB
node distances:
node 0 1 2
 0: 10 12 12
 1: 12 10 12
 2: 12 12 10
```

9. /proc/meminfo

```
MemTotal: 791640580 kB
```

10. who -r

```
run-level 3 Oct 7 14:59
```

11. Systemd service manager version: systemd 252 (252-32.el9_4)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Platform Notes (Continued)

```
sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned
udisks2 upower vgaauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower
cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq fancontrol gssproxy
iprdump iprinit iprupdate ipsec iscsi-init iscsid iscsiuio kpatch kvm_stat ledmon
man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nfs-blkmap
nfs-server nftables nvme-autoconnect ostree-readonly-sysroot-migration
ostree-state-overlay@ pesign podman podman-auto-update podman-clean-transient podman-kube@
podman-restart psacct rdisc rhcd rhsm rhsm-facts rpmbuild-rebuild
selinux-check-proper-disable serial-getty@ speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext thermald wpa_supplicant
indirect iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 8:  
    current policy: frequency should be within 800 MHz and 3.90 GHz.  
              The governor "performance" may decide which speed to use  
              within this range.  
    boost state support:  
      Supported: yes  
      Active: yes
```

```
-----  
15. tuned-adm active  
Current active profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 40  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  10
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
    defrag           always defer defer+madvise [madvise] never  
    enabled          [always] madvise never  
    hpage_pmd_size  2097152  
    shmem_enabled   always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs  60000  
    defrag                1  
    max_ptes_none         511  
    max_ptes_shared       256  
    max_ptes_swap         64  
    pages_to_scan         4096  
    scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release      Red Hat Enterprise Linux 9.4 (Plow)  
redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)  
system-release  Red Hat Enterprise Linux release 9.4 (Plow)
```

```
-----  
20. Disk information  
SPEC is set to: /home/speccpu  
Filesystem           Type  Size  Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs   3.5T  141G  3.3T  5%  /home
```

```
-----  
21. /sys/devices/virtual/dmi/id  
Vendor:        New H3C Technologies Co., Ltd.  
Product:       H3C UniServer R3900 G7  
Serial:        210235A526H249000006
```

```
-----  
22. dmidecode  
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
 10x Samsung M327R8GA0PB0-CLVEM 64 GB 2 rank 11200, configured at 8800  
 2x Samsung M327R8GA0PB0-CLVFM 64 GB 2 rank 11200, configured at 8800
```

```
-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      American Megatrends International, LLC.  
BIOS Version:     7.10.01P91  
BIOS Date:        09/25/2024  
BIOS Revision:    5.35  
Firmware Revision: 1.16
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Compiler Version Notes

```
=====
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```



```
=====
C++          | 508.namd_r(base) 510.parest_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```



```
=====
C++, C       | 511.povray_r(base) 526.blender_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```



```
=====
C++, C, Fortran | 507.cactuBSSN_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```



```
=====
Fortran      | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```



```
=====
Fortran, C   | 521.wrf_r(base) 527.cam4_r(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 1250

H3C UniServer R3900 G7 (Intel Xeon 6979P)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jun-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -futo  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-futo -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -futo -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -futo -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-07 05:14:32-0400.

Report generated on 2024-11-25 17:28:04 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-23.