



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3


Test Date: Sep-2024

Test Sponsor: HPE

Hardware Availability: Nov-2022

Tested by: HPE

Software Availability: Sep-2024

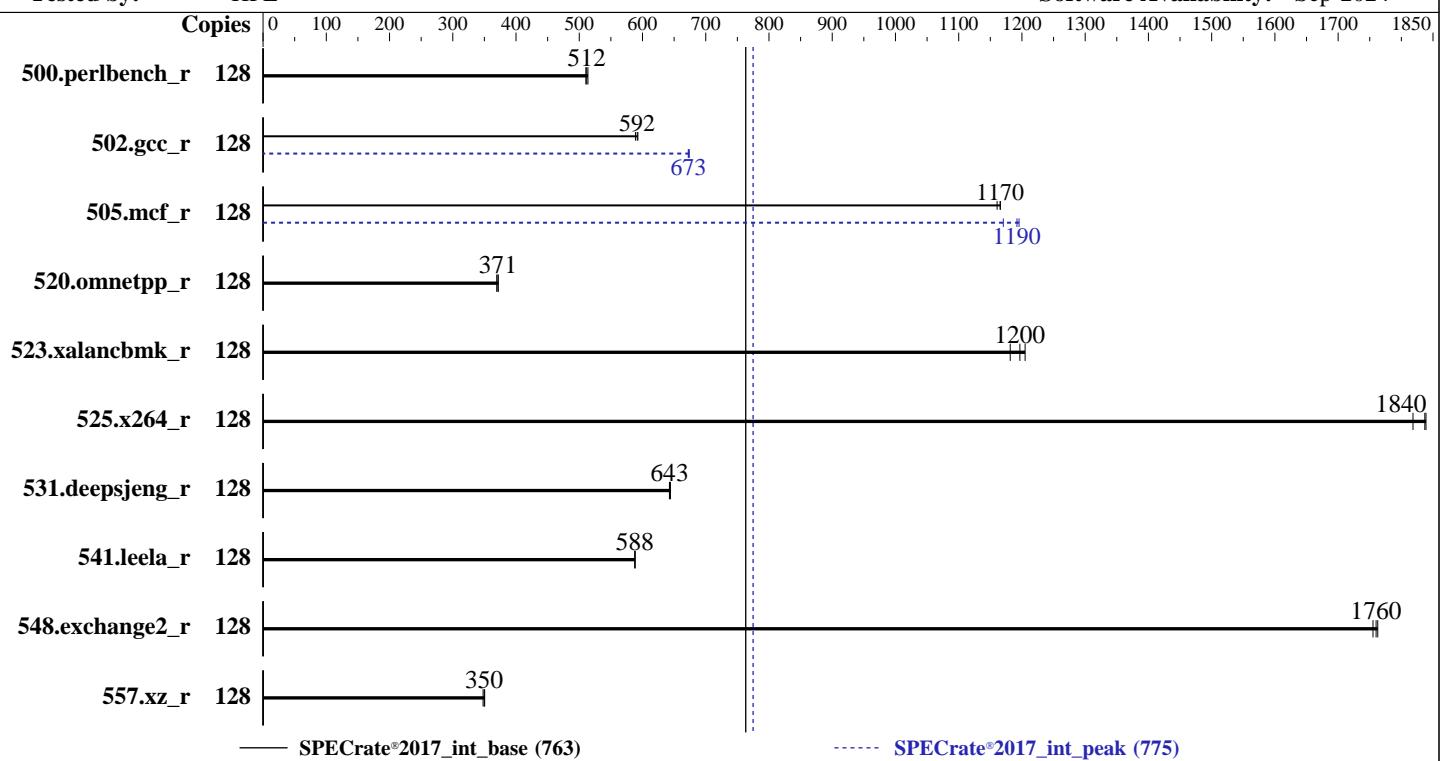

Hardware

CPU Name: AMD EPYC 9334
 Max MHz: 3900
 Nominal: 2700
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.4 LTS
 Compiler: Kernel 5.15.0-112-generic
 Parallel: C/C++/Fortran: Version 5.0.0 of AOCC
 Firmware: No
 File System: HPE BIOS Version v1.58 01/04/2024 released
 Jan-2024
 System State: ext4
 Base Pointers: Run level 5 (multi-user)
 Peak Pointers: 64-bit
 Other: 32/64-bit
 Power Management: None
 BIOS and OS set to prefer performance at the
 cost of
 additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Date: Sep-2024

Test Sponsor: HPE

Hardware Availability: Nov-2022

Tested by: HPE

Software Availability: Sep-2024

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	399	510	397	514	398	512	128	399	510	397	514	398	512		
502.gcc_r	128	306	593	306	592	308	589	128	269	674	269	673	270	672		
505.mcf_r	128	178	1160	177	1170	177	1170	128	173	1200	174	1190	177	1170		
520.omnetpp_r	128	452	371	455	369	452	372	128	452	371	455	369	452	372		
523.xalancbmk_r	128	112	1210	114	1180	113	1200	128	112	1210	114	1180	113	1200		
525.x264_r	128	122	1840	123	1820	122	1840	128	122	1840	123	1820	122	1840		
531.deepsjeng_r	128	228	643	228	643	228	644	128	228	643	228	643	228	644		
541.leela_r	128	360	588	360	588	360	588	128	360	588	360	588	360	588		
548.exchange2_r	128	191	1760	190	1760	191	1760	128	191	1760	190	1760	191	1760		
557.xz_r	128	397	348	395	350	394	350	128	397	348	395	350	394	350		

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
 'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
 To enable THP for all allocations for peak runs,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.70 GHz, AMD EPYC 9334)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Data Fabric C-State Enable set to Force Enabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.B

Sysinfo program /cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on dl385 Wed Sep 18 07:19:39 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
19. OS release  
20. Disk information  
21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS
```

```
-----  
1. uname -a  
Linux dl385 5.15.0-112-generic #122-Ubuntu SMP Thu May 23 07:48:21 UTC 2024 x86_64 x86_64 x86_64 GNU/Linux
```

```
-----  
2. w  
07:19:40 up 15:12, 2 users, load average: 0.22, 0.05, 0.02  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
epc tty1 - Tue16 15:08m 0.11s 0.03s -bash  
root pts/0 16.1.33.101 Tue16 28.00s 2.11s 0.80s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
-----  
3. Username  
From environment variable $USER: root
```

```
-----  
4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 6190935  
nofiles 1024  
vmemory(kbytes) unlimited  
locks unlimited  
rtprio 0
```

```
-----  
5. sysinfo process ancestry  
/sbin/init  
sshd: root@pts/0  
-bash  
python3 ./run_amd_rate_aocc500_znver5_A1.py  
/bin/bash ./amd_rate_aocc500_znver5_A1.sh  
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune peak --reportable --iterations 3 intrate  
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune peak --reportable --iterations 3 --nopower  
--runmode rate --tune peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.003/templogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /cpu2017
```

```
-----  
6. /proc/cpuinfo  
model name : AMD EPYC 9334 32-Core Processor  
vendor_id : AuthenticAMD  
cpu family : 25  
model : 17  
stepping : 1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Date: Sep-2024

Test Sponsor: HPE

Hardware Availability: Nov-2022

Tested by: HPE

Software Availability: Sep-2024

Platform Notes (Continued)

```

microcode      : 0xa101144
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 3584 4K pages
cpu cores     : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 64-127

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9334 32-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           2700.0000
CPU min MHz:           1500.0000
BogoMIPS:              5392.03
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                      lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf
                      rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe
                      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                      cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skininit wdt tce
                      topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13
                      cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                      fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq
                      rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                      avx512vl xsaveopt xsavenc xgetbv1 xsaves cqmq_llc cqmq_occur_llc
                      cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                      wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale
                      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                      v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi umip pkru ospke avx512_vbmi2
                      gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpocntdq la57
                      rdpid overflow_recov succor smca fsrm flush_ll1
Virtualization:        AMD-V
L1d cache:              2 MiB (64 instances)
L1i cache:              2 MiB (64 instances)
L2 cache:               64 MiB (64 instances)
L3 cache:               256 MiB (8 instances)
NUMA node(s):           8
NUMA node0 CPU(s):      0-7,64-71

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Date: Sep-2024

Test Sponsor: HPE

Hardware Availability: Nov-2022

Tested by: HPE

Software Availability: Sep-2024

Platform Notes (Continued)

NUMA node1 CPU(s):	8-15,72-79
NUMA node2 CPU(s):	16-23,80-87
NUMA node3 CPU(s):	24-31,88-95
NUMA node4 CPU(s):	32-39,96-103
NUMA node5 CPU(s):	40-47,104-111
NUMA node6 CPU(s):	48-55,112-119
NUMA node7 CPU(s):	56-63,120-127
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Llrf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Mitigation; safe RET
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines; IBPB conditional; IBRS_FW; STIBP always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-7,64-71

node 0 size: 193173 MB

node 0 free: 192472 MB

node 1 cpus: 8-15,72-79

node 1 size: 193531 MB

node 1 free: 192903 MB

node 2 cpus: 16-23,80-87

node 2 size: 193531 MB

node 2 free: 192674 MB

node 3 cpus: 24-31,88-95

node 3 size: 193531 MB

node 3 free: 192923 MB

node 4 cpus: 32-39,96-103

node 4 size: 193531 MB

node 4 free: 192948 MB

node 5 cpus: 40-47,104-111

node 5 size: 193531 MB

node 5 free: 192949 MB

node 6 cpus: 48-55,112-119

node 6 size: 193531 MB

node 6 free: 193030 MB

node 7 cpus: 56-63,120-127

node 7 size: 193483 MB

node 7 free: 192967 MB

node distances:

node 0	1	2	3	4	5	6	7
--------	---	---	---	---	---	---	---

0:	10	12	12	12	32	32	32
----	----	----	----	----	----	----	----

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Platform Notes (Continued)

```
1: 12 10 12 12 32 32 32 32  
2: 12 12 10 12 32 32 32 32  
3: 12 12 12 10 32 32 32 32  
4: 32 32 32 32 10 12 12 12  
5: 32 32 32 32 12 10 12 12  
6: 32 32 32 32 12 12 10 12  
7: 32 32 32 32 12 12 12 10
```

```
-----  
9. /proc/meminfo  
MemTotal: 1584996248 kB
```

```
-----  
10. who -r  
run-level 5 Sep 17 16:09
```

```
-----  
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)  
Default Target Status  
graphical degraded
```

```
-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
```

```
-----  
13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init  
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager  
grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent  
multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db  
setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore  
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw  
unattended-upgrades vgaauth  
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs  
disabled console-getty debug-shell iscsid nftables rsync serial-getty@  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync upower  
generated apport  
indirect uuidd  
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo  
x11-common
```

```
-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/vmlinuz-5.15.0-112-generic  
root=/dev/mapper/ubuntu--vg-ubuntu--lv  
ro
```

```
-----  
15. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 1.50 GHz and 2.70 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
boost state support:  
    Supported: yes  
    Active: yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Platform Notes (Continued)

```
Boost States: 0
Total States: 3
Pstate-P0: 2700MHz
```

```
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs    10000
```

```
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.4 LTS
```

```
20. Disk information
SPEC is set to: /cpu2017
Filesystem              Type  Size  Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4  295G  18G  262G  7% /
```

```
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL385 Gen11
Product Family: ProLiant
Serial:          CZ230308GV
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.70 GHz, AMD EPYC 9334)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMCG94AEBRA109N 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.58
BIOS Date: 01/04/2024
BIOS Revision: 1.58
Firmware Revision: 1.58

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C | 502.gcc_r(peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Compiler Version Notes (Continued)

```
=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
     | 541.leela_r(base, peak)
-----
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----
```

```
=====
Fortran | 548.exchange2_r(base, peak)
-----
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIB
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdaloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIB -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

```
502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.3.html>
<http://www.spec.org/cpu2017/flags/aocc500-flags.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017_int_base = 763

SPECrate®2017_int_peak = 775

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2024

Hardware Availability: Nov-2022

Software Availability: Sep-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.3.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-18 03:19:39-0400.

Report generated on 2024-11-20 11:02:31 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-19.