



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Feb-2025
Software Availability: Oct-2024

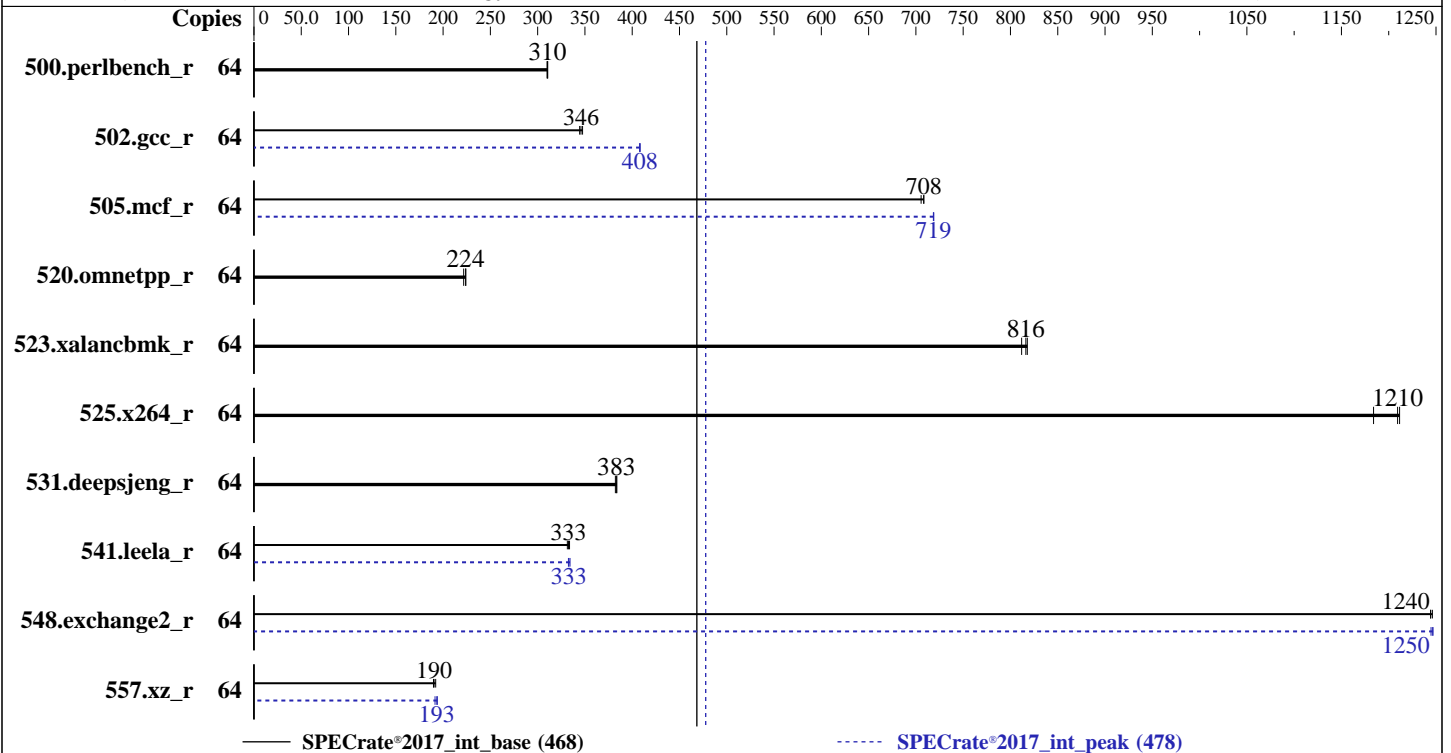

Hardware

CPU Name: AMD EPYC 9135
Max MHz: 4300
Nominal: 3650
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 64 MB I+D on chip per chip,
16 MB shared / 4 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage: 1 x 1.92 TB M.2 NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Lenovo BIOS Version QGE131R 6.10 released Sep-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	328	311	329	310	<u>328</u>	<u>310</u>	64	328	311	329	310	<u>328</u>	<u>310</u>
502.gcc_r	64	261	348	263	344	<u>262</u>	<u>346</u>	64	222	408	222	408	<u>222</u>	<u>408</u>
505.mcf_r	64	146	708	<u>146</u>	<u>708</u>	147	705	64	144	718	144	719	<u>144</u>	<u>719</u>
520.omnetpp_r	64	379	222	<u>375</u>	<u>224</u>	375	224	64	379	222	<u>375</u>	<u>224</u>	375	224
523.xalancbmk_r	64	82.6	818	83.2	812	<u>82.8</u>	<u>816</u>	64	82.6	818	83.2	812	<u>82.8</u>	<u>816</u>
525.x264_r	64	92.5	1210	94.7	1180	<u>92.7</u>	<u>1210</u>	64	92.5	1210	94.7	1180	<u>92.7</u>	<u>1210</u>
531.deepsjeng_r	64	191	384	192	382	<u>191</u>	<u>383</u>	64	191	384	192	382	<u>191</u>	<u>383</u>
541.leela_r	64	<u>319</u>	<u>333</u>	318	334	320	331	64	317	334	319	333	<u>318</u>	<u>333</u>
548.exchange2_r	64	<u>135</u>	<u>1240</u>	135	1250	135	1240	64	<u>135</u>	<u>1250</u>	135	1240	134	1250
557.xz_r	64	360	192	364	190	<u>363</u>	<u>190</u>	64	356	194	<u>358</u>	<u>193</u>	361	191

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

cpupower set to performance mode
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-a
occ500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

P-State set to Enabled

NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Oct 26 15:56:43 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

1. `uname -a`
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36cle09)
x86_64 x86_64 x86_64 GNU/Linux

2. `w`
15:56:43 up 3 min, 1 user, load average: 0.11, 0.19, 0.09
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. `ulimit -a`
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6190844
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6190844
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run025-compliant-amd-rateint.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.189/templogs/preenv.intrate.189.0.log --lognum 189.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1

6. `/proc/cpuinfo`
model name : AMD EPYC 9135 16-Core Processor
vendor_id : AuthenticAMD
cpu family : 26
model : 2
stepping : 1
microcode : 0xb002116
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

TLB size : 192 4K pages
cpu cores : 16
siblings : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27
physical id 1: core ids 0-3,8-11,16-19,24-27
physical id 0: apicids 0-7,16-23,32-39,48-55
physical id 1: apicids 64-71,80-87,96-103,112-119

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       64
On-line CPU(s) list:         0-63
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9135 16-Core Processor
BIOS Model name:             AMD EPYC 9135 16-Core Processor
BIOS CPU family:             107
CPU family:                   26
Model:                       2
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                    2
Stepping:                     1
Frequency boost:              enabled
CPU(s) scaling MHz:          103%
CPU max MHz:                  3650.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     7288.54
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
                                avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                flush_lld debug_swap

Virtualization:               AMD-V
Lld cache:                    1.5 MiB (32 instances)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

L1i cache:                1 MiB (32 instances)
L2 cache:                 32 MiB (32 instances)
L3 cache:                 128 MiB (8 instances)
NUMA node(s):             8
NUMA node0 CPU(s):       0-3,32-35
NUMA node1 CPU(s):       4-7,36-39
NUMA node2 CPU(s):       8-11,40-43
NUMA node3 CPU(s):       12-15,44-47
NUMA node4 CPU(s):       16-19,48-51
NUMA node5 CPU(s):       20-23,52-55
NUMA node6 CPU(s):       24-27,56-59
NUMA node7 CPU(s):       28-31,60-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability Lltf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow:  Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 193074 MB
node 0 free: 192736 MB
node 1 cpus: 4-7,36-39
node 1 size: 193533 MB
node 1 free: 192944 MB
node 2 cpus: 8-11,40-43
node 2 size: 193533 MB
node 2 free: 193168 MB
node 3 cpus: 12-15,44-47
node 3 size: 193533 MB
node 3 free: 193186 MB
node 4 cpus: 16-19,48-51
node 4 size: 193533 MB
node 4 free: 193243 MB
node 5 cpus: 20-23,52-55
node 5 size: 193533 MB
node 5 free: 193217 MB
node 6 cpus: 24-27,56-59
node 6 size: 193533 MB
node 6 free: 193190 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```

node 7 cpus: 28-31,60-63
node 7 size: 193461 MB
node 7 free: 193076 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

9. /proc/meminfo
   MemTotal:      1584883148 kB

```

```

10. who -r
    run-level 3 Oct 26 15:53

```

```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target Status
    multi-user      running

```

```

12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
    kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix
    purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore wicked
    wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
    chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
    firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
    kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
    serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
    systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
    systemd-timesyncd
    generated      ntp_sync
    indirect       systemd-userdbd uidd wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
    root=UUID=240b751b-cc96-4bc0-bc79-208919660c0a
    splash=silent
    mitigations=auto
    quiet
    security=apparmor

```

```

14. cpupower frequency-info
    analyzing CPU 15:
    current policy: frequency should be within 1.50 GHz and 3.65 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Platform Notes (Continued)

boost state support:
Supported: yes
Active: yes

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 1.8T 113G 1.7T 7% /

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR675 V3 System Board
Product Family: ThinkSystem
Serial:          None

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Feb-2025
Software Availability: Oct-2024

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0PB1-CCPPC 64 GB 2 rank 6400, configured at 6000
8x Samsung M321R8GA0PB1-CCPYC 64 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: QGE131R-6.10
BIOS Date: 09/11/2024
BIOS Revision: 6.10
Firmware Revision: 8.10

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
         | 541.leela_r(base, peak)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

```

```

=====
Fortran | 548.exchange2_r(base, peak)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 468

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017_int_base = 468

SPECrate®2017_int_peak = 478

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Feb-2025

Software Availability: Oct-2024

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-26 03:56:42-0400.

Report generated on 2024-11-20 11:10:15 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-19.