SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model N4000

SPECint_rate95 = 739

SPECint_rate_base95 = 667

SPEC license # 3	Tested By: HP Richardson, TX	Test Date: Jan-2000	Hardware Avail: Apr-2000	Software Avail: Apr-2000

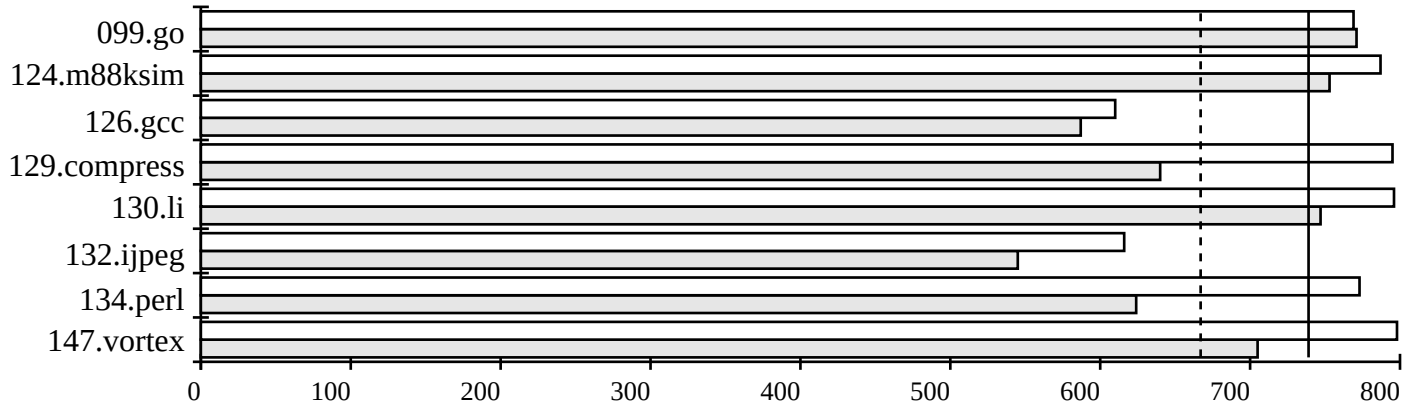

Hardware/Software Configuration for:
HP 9000 Model N4000

Hardware

Model Name:	HP 9000 Model N4000
CPU:	552 MHz PA-RISC 8600
FPU:	Integrated
Number of CPU(s):	2
Primary Cache:	512KBI+1MBD
Secondary Cache:	None
Other Cache:	None
Memory:	8GB
Disk Subsystem:	1x9GB
Other Hardware:	None

Software

Operating System:	HP-UX B.11.00 U 9000/800 74565 unlimited-user
Compiler:	HP92453-01 A.11.01.00 HP C Compiler
File System:	HP-UX VxFS
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	2	107	771	2	108	769
124.m88ksim	2	45.4	753	2	43	787
126.gcc	2	52.1	587	2	50	610
129.compress	2	50.7	640	2	41	795
130.li	2	45.8	747	2	43	796
132.ijpeg	2	79.2	545	2	70	616
134.perl	2	54.8	624	2	44	773
147.vortex	2	68.9	705	2	61	798
SPECint_rate_base95 (G. Mean)			667			
SPECint_rate95 (G. Mean)						739

Notes/Tuning Information

```
Portability flag: -Ae

Base flags:
All: fastmem.o +Oall +I/+P +Ostaticprediction

Peak flags:
All:  +ESfic +ESlit +I/+P +Ostaticprediction
Linker Flag: -Wl,-aarchive
099: +O4 +Oentrysched +Olibcalls +Onolimit +Onoloopunroll +Optrs_strongly_typed fastmem.o
124: +Oall +Onoparmsoverlap +Optrs_strongly_typed
126: +O4 +Odataprefetch +Olibcalls +Onolimit +Optrs_ansi -DSPEC fastmem.o
129: +Oall +Odataprefetch +Optrs_strongly_typed +Owhole_program_mode
130: +ESsfc +Oall +Oinline_budget=400 +Onoptrs_to_globals +Owhole_program_mode -lm
132: +ESsfc +Oall +Odataprefetch +Optrs_strongly_typed +Owhole_program_mode
134: +ESsfc +O4 -Ac +Oinline_budget=70 +Olibcalls +Onolimit +Owhole_program_mode -lm fastmem.o
147: +Oall +Oinline_budget=800 +Optrs_strongly_typed -lm fastmem.o
Note: +I/+P indicates use of profile-based optimization
```