SPEC CFP95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Advanced Micro Devices
ASUS K7V-RM mainboard, 900MHz Athlon processor

SPECfp95 = --

SPECfp_base95 = 27.9

SPEC license # 49	Tested By: --	Test Date: Mar-2000	Hardware Avail: Mar-2000	Software Avail: Nov-1999

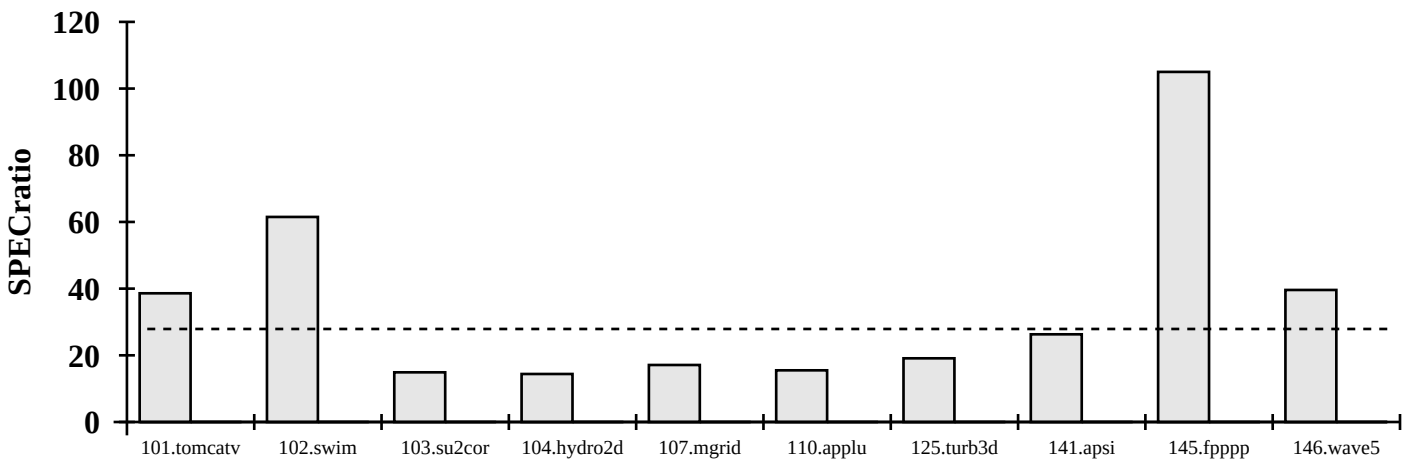

Hardware/Software Configuration for:
ASUS K7V-RM mainboard, 900MHz Athlon processor

Hardware

Model Name:	Asus K7V-RM w/ Via KX-133
CPU:	AMD Athlon processor 900 MHz
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	64KBI + 64KBD
Secondary Cache:	512KB(I+D), 300MHz
Other Cache:	none
Memory:	256MB PC-133 SDRAM CL2
Disk Subsystem:	IBM DPTA-373420
Other Hardware:	3DBlaster Annihilator 32MB DDR graphics adapter

Software

Operating System:	Windows NT 4 Workstation with SP6a
Compiler:	Compaq Visual Fortran V6.1, KAI VKAP V3.6
File System:	NTFS
System State:	Default

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
101.tomcatv	3700	95.8	38.6	--	--
102.swim	8600	140	61.5	--	--
103.su2cor	1400	94.2	14.9	--	--
104.hydro2d	2400	166	14.4	--	--
107.mgrid	2500	146	17.1	--	--
110.applu	2200	141	15.5	--	--
125.turb3d	4100	215	19.1	--	--
141.apsi	2100	79.9	26.3	--	--
145.fpppp	9600	91.5	105	--	--
146.wave5	3000	75.7	39.6	--	--
SPECfp_base95 (G. Mean)			27.9		
			SPECfp95 (G. Mean)		--

Notes/Tuning Information

```
Flags:
Base: /optimize:5 /fast /WKscalaropt

The tested system can be assembled using an ATX mid-tower case such
the Antec KS-282 and a 300W ATX power supply such as the Sparkle
```

For More Information Contact: SPEC info@spec.org http://www.spec.org/

-- Prepared By: --