SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Enterprise 4500

SPECint_rate95 = 2119

SPECint_rate_base95 = 1729

SPEC license # 6	Tested By: Sun, Palo Alto	Test Date: Sep-98	Hardware Avail: Dec-98	Software Avail: Oct-98

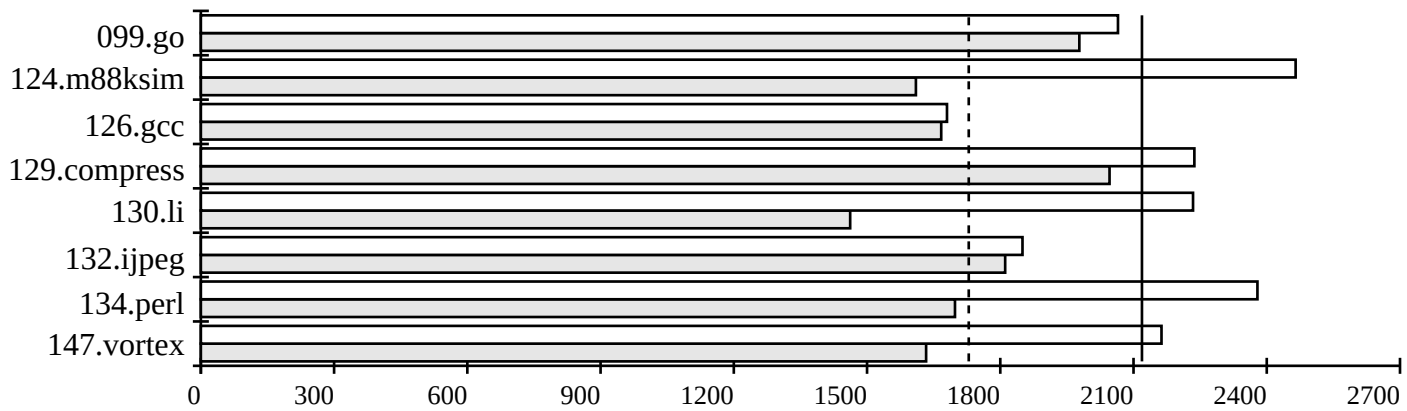

Hardware/Software Configuration for:
Sun Enterprise 4500

Hardware

Model Name:	Sun Enterprise 4500
CPU:	400MHz UltraSPARC II
FPU:	Integrated
Number of CPU(s):	14
Primary Cache:	16KBI+16KBD on chip
Secondary Cache:	4096KB(I+D) off chip
Other Cache:	None
Memory:	8192MB
Disk Subsystem:	2 x 9GB
Other Hardware:	FastEthernet

Software

Operating System:	Solaris 2.7
Compiler:	Sun C 5.0
File System:	UFS
System State:	Multi-User
Kernel Extensions:	

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	14	293	1978	14	281	2065
124.m88ksim	14	149	1610	14	97	2465
126.gcc	14	129	1667	14	128	1680
129.compress	14	111	2046	14	101	2237
130.li	14	164	1462	14	107	2234
132.ijpeg	14	167	1811	14	163	1850
134.perl	14	141	1698	14	101	2379
147.vortex	14	208	1633	14	157	2163
SPECint_rate_base95 (G. Mean)			1729			
SPECint_rate95 (G. Mean)						2119

Notes/Tuning Information

```
Baseline: -fast -xO5 -xarch=v8plusa -xprofile=use
099.go: -fast -xO4 -xarch=v8plus -xrestrict -xcrossfile -W2,-O4+ansi_alias+bopt -xprofile=use
124.m88ksim: -fast -xO5 -xsafe=mem -xarch=v8plus -xcrossfile -xrestrict
124 cont: -W2,-O4+cond_elim+pde,-Mt9000 -Wc,-Qiselect-sw_pf_tbl_th=20 -xprofile=use
126.gcc: -fast -xO4 -xarch=v8plus -W2,-O4+ansi_alias+cond_elim -xprofile=use
129.compress: -fast -xO4 -W2,-O4+ansi_alias+pde -xarch=v8plus -xprofile=use
130.li: PASS1=-fast -xO4 -xarch=v8plus -xcrossfile -xprofile=collect
130.li: PASS2=-fast -xO5 -xsafe=mem -xarch=v8plus -xcrossfile
130 PASS2 cont: -W2,-O4+ansi_alias+cond_elim+pde,-Mt350,-whole,-crit -xprofile=use
132.ijpeg: -fast -xO5 -xsafe=mem -xarch=v8plus -W2,-O4+ansi_alias+cond_elim -xprofile=use
134.perl: -fast -xO4 -xarch=v8plusa -xchip=ultra -xcrossfile -W2,-Mp1,-ANSI_S,-O4+cond_elim
134 cont: Wc,-Qiselect-sw_pf_tbl_th=30 -xprofile=use -lfast
147.vortex: PASS1=-fast -xO4 -xarch=v8plus -xcrossfile -xprofile=collect
147: PASS2=-fast -xO5 -xsafe=mem -xarch=v8plus -xcrossfile -xprofile=use
147 PASS2 cont: -W2,-O4+cond_elim,-Mt500,-Mr6000,crit
Portability: 124.m88ksim, 132.ijpeg: -DSYSV -Xc, 126.gcc: -Dalloca=__builtin_alloca -Xc
others: -Xc
Shell limits: # ulimit -n 1024  or % limit descriptors 1024
Config Version @(#)uds.cfg 1.0 98/09/03
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --