SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

FUJITSU LIMITED
GP7000F Model600 250

SPECfp_rate95 = 180

SPECfp_rate_base95 = 166

SPEC license # 19	Tested By: FUJITSU LIMITED	Test Date: Dec-98	Hardware Avail: Dec-98	Software Avail: Feb-99

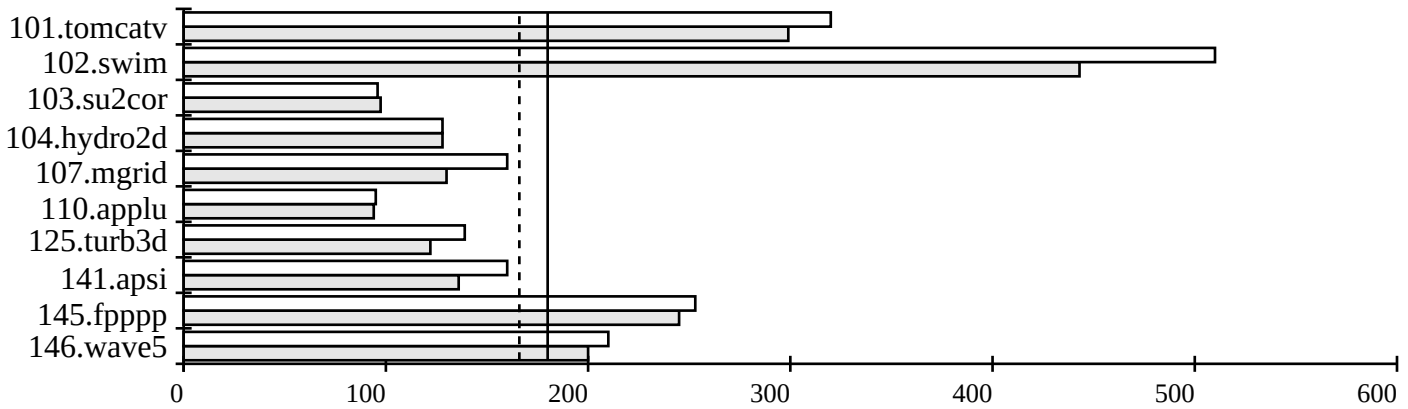

Hardware/Software Configuration for:
GP7000F Model600 250

Hardware

Model Name:	FUJITSU GP7000F Model600 250
CPU:	248MHz SPARC64 GP
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	64KBI+64KBD on chip, 4way
Secondary Cache:	4.0MB(I+D) off chip
Other Cache:	None
Memory:	4096MB
Disk Subsystem:	2 x 9.0GB
Other Hardware:	Ethernet

Software

Operating System:	Solaris 2.6 HW:5/98
Compiler:	Fujitsu Fortran V4.0.1
File System:	UFS
System State:	Single User
Kernel Extensions:	set consistent_coloring=1

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	1	111	299	1	104	320
102.swim	1	175	443	1	152	510
103.su2cor	1	129	97.4	1	131	95.9
104.hydro2d	1	169	128	1	168	128
107.mgrid	1	173	130	1	141	160
110.applu	1	211	94.0	1	208	95.0
125.turb3d	1	303	122	1	266	139
141.apsi	1	139	136	1	118	160
145.fpppp	1	352	245	1	341	253
146.wave5	1	135	200	1	129	210
SPECfp_rate_base95 (G. Mean)			166			
SPECfp_rate95 (G. Mean)						180

Notes/Tuning Information

```
Baseline flags were: -Kfast,V8PFMADD,prefetch,gs
Nonbaseline: PEAKOPT=-X7 -Kfast,V8PFMADD,GREG,gs,prefetch; EXTRA_FFLAGS=-dn
101: ${PEAKOPT} -Kpreex,eval
102: ${PEAKOPT} -Koffset=160 -Ksp=0
103: ${PEAKOPT} -Knofuse,eval -x-
104: ${PEAKOPT} -Kpreex,eval
107: ${PEAKOPT} -Kcommonpad,eval
110: ${PEAKOPT} -Kauto,preex,eval
125: ${PEAKOPT} -Kcommonpad,eval -Ksp=0 -x-
141: -X7 ${PEAKOPT} -Kauto,preex,eval
145: ${PEAKOPT} -Keval
146: ${PEAKOPT} -Kauto,nofuse -x10
Shell limits: ulimit -n 1024; ulimit -s 81920;
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --