SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Intel Corporation
Intel SE440BX2 Motherboard(450MHz, Pentium II processor)

SPECint95 = 18.5

SPECint_base95 = 18.5

SPEC license # 14 | Tested By: Intel Corp. | Test Date: Feb-99 | Hardware Avail: Mar-99 | Software Avail: Mar-99

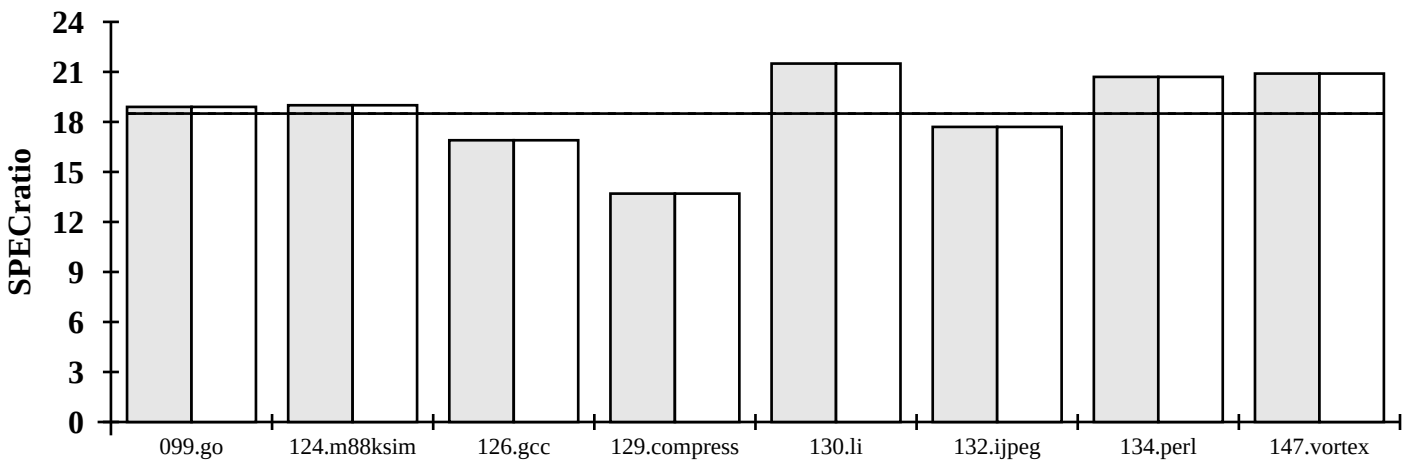

Hardware/Software Configuration for:
Intel SE440BX2 Motherboard(450MHz, Pentium II processor)

A line in your configuration is too long
or you have too many lines.
Please fix the problem and try again

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	243	18.9	243	18.9
124.m88ksim	1900	99.9	19.0	100	19.0
126.gcc	1700	101	16.9	101	16.9
129.compress	1800	132	13.7	132	13.7
130.li	1900	88.3	21.5	88	21.5
132.ijpeg	2400	135	17.7	135	17.7
134.perl	1900	91.6	20.7	92	20.7
147.vortex	2700	129	20.9	129	20.9
SPECint_base95 (G. Mean)			18.5		
		SPECint95 (G. Mean)			18.5

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -G6 -Qipo -Qprof_gen -Qprof_dir c:/temp/IRCDB
Pass2: -G6 -Qipo -Qprof_use -Qprof_dir c:/temp/IRCDB
-prof_dir is a location flag and not an optimization flag
Portability: 124:-DNT -DLEHOST  125: -Qlowercase
Portability: 126: -D__STDC__=0 -DONLY_INT_FIELDS=0 -Dalloca=_alloca -DDeleteFile=remove
Portability: 132: -DSYSV -DMSDOS
Portability: 134: -DMSDOS -DI_TIME
The Intel Compiler 4.0 for Windows NT is shipped with VTune 4.0, see http://developer.intel.com/
Microsoft Visual C++ 6.0 is also installed for libraries
Tested systems can be used with: Shin-G ATX Computer Case; Sparkle, Inc. ATX Power Supply
Product description located as of 8/98:
http://developer.intel.com/design/motherbd/se/se_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://www.intel.com/intel/contact/ for further information
```

For More Information Contact:

SPEC

info@spec.org
http://www.spec.org/

--

Prepared By: --