SPEChpc™ 2021 Tiny Result

Lenovo Global Technology

ThinkSystem SR655 V3 (AMD EPYC 9654P)

SPEChpc 2021_tny_base = 6.99

SPEChpc 2021_tny_peak = 6.99

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Feb-2023

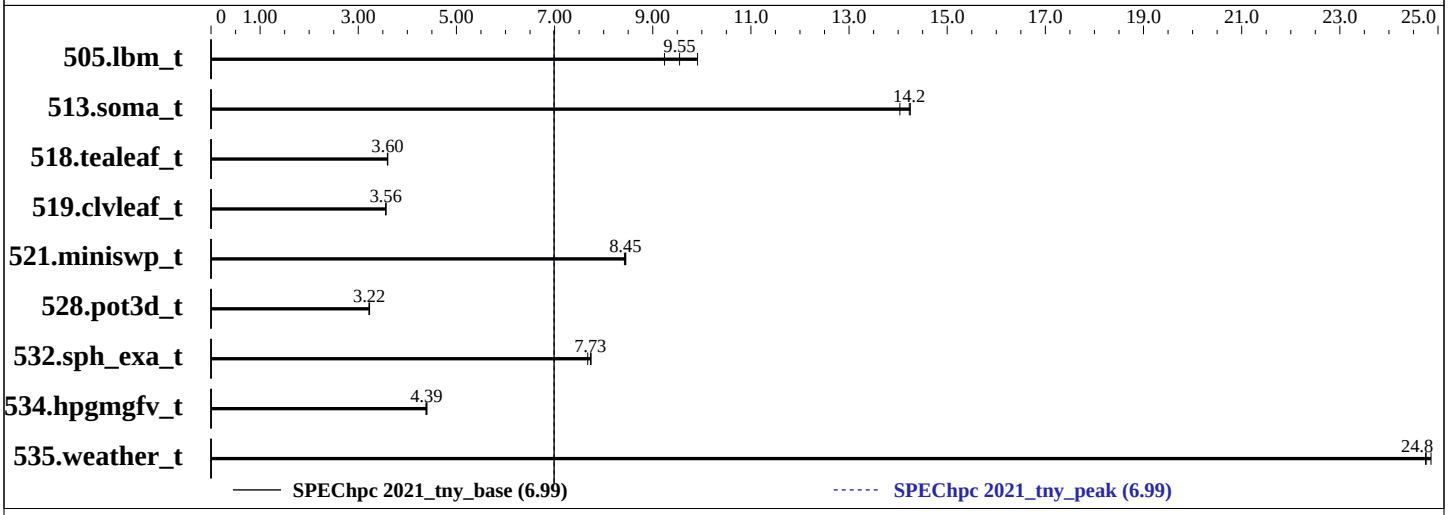

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	OMP	12	16	**236**	**9.55**	244	9.24	227	9.91	OMP	12	16	**236**	**9.55**	244	9.24	227	9.91
513.soma_t	OMP	12	16	260	14.2	**260**	**14.2**	264	14.0	OMP	12	16	260	14.2	**260**	**14.2**	264	14.0
518.tealeaf_t	OMP	12	16	**458**	**3.60**	459	3.59	458	3.60	OMP	12	16	**458**	**3.60**	459	3.59	458	3.60
519.clvleaf_t	OMP	12	16	464	3.56	463	3.56	**463**	**3.56**	OMP	12	16	464	3.56	463	3.56	**463**	**3.56**
521.miniswp_t	OMP	12	16	190	8.42	189	8.45	**189**	**8.45**	OMP	12	16	190	8.42	189	8.45	**189**	**8.45**
528.pot3d_t	OMP	12	16	660	3.22	**659**	**3.22**	658	3.23	OMP	12	16	660	3.22	**659**	**3.22**	658	3.23
532.sph_exa_t	OMP	12	16	**252**	**7.73**	252	7.74	254	7.68	OMP	12	16	**252**	**7.73**	252	7.74	254	7.68
534.hpgmgfv_t	OMP	12	16	268	4.38	**268**	**4.39**	267	4.40	OMP	12	16	268	4.38	**268**	**4.39**	267	4.40
535.weather_t	OMP	12	16	**130**	**24.8**	130	24.9	130	24.7	OMP	12	16	**130**	**24.8**	130	24.9	130	24.7

SPEChpc 2021_tny_base = 6.99

SPEChpc 2021_tny_peak = 6.99

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Lenovo Global Technology

ThinkSystem SR655 V3 (AMD EPYC 9654P)

SPEChpc 2021_tny_base = 6.99

SPEChpc 2021_tny_peak = 6.99

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Feb-2023

Hardware Summary

Type of System:	Homogeneous Cluster
Compute Node:	ThinkSystem SR655 V3
Interconnect:	Nvidia Mellanox ConnectX-6 HDR
Compute Nodes Used:	1
Total Chips:	1
Total Cores:	96
Total Threads:	192
Total Memory:	768 GB
Max. Peak Threads:	16

Software Summary

Compiler:	Intel oneAPI Compiler 2022.1.0
MPI Library:	Intel MPI Library for Linux OS, Build 20220227
Other MPI Info:	--
Other Software:	--
Base Parallel Model:	OMP
Base Ranks Run:	12
Base Threads Run:	16
Peak Parallel Models:	OMP
Minimum Peak Ranks:	12
Maximum Peak Ranks:	12
Max. Peak Threads:	16
Min. Peak Threads:	16

Node Description: ThinkSystem SR655 V3

Hardware

Number of nodes:	1
Uses of the node:	Compute
Vendor:	Lenovo Global Technology
Model:	ThinkSystem SR655 V3
CPU Name:	AMD EPYC 9654P
CPU(s) orderable:	1 chips
Chips enabled:	1
Cores enabled:	96
Cores per chip:	96
Threads per core:	2
CPU Characteristics:	Max Boost Clock up to 3.7 GHz
CPU MHz:	2400
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	384 MB I+D on chip per chip 32 MB shared / 8 cores
Other Cache:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
Disk Subsystem:	1x ThinkSystem 2.5" 5300 480GB SSD
Other Hardware:	None
Accel Count:	--
Accel Model:	--
Accel Vendor:	--
Accel Type:	--
Accel Connection:	--
Accel ECC enabled:	--
Accel Description:	--
Adapter:	Nvidia Mellanox ConnectX-6 HDR
Number of Adapters:	1
Slot Type:	PCI-Express 4.0 x16
Data Rate:	200 Gb/s
Ports Used:	1

(Continued on next page)

Software

Accelerator Driver:	--
Adapter:	Nvidia Mellanox ConnectX-6 HDR
Adapter Driver:	5.7-1.0.2
Adapter Firmware:	20.28.1002
Operating System:	Red Hat Enterprise Linux Server release 8.6, Kernel 4.18.0-372.9.1.el8.x86_64
Local File System:	xfs
Shared File System:	None
System State:	Multi-user, run level 3
Other Software:	None

Node Description: ThinkSystem SR655 V3

Hardware (Continued)

Interconnect Type: ConnectX-6 HDR

Interconnect Description: Nvidia Mellanox ConnectX-6 HDR

Hardware

Vendor:	Nvidia
Model:	Nvidia Mellanox ConnectX-6 HDR
Switch Model:	QM8700
Number of Switches:	1
Number of Ports:	40
Data Rate:	200 Gb/s
Firmware:	3.9.0606
Topology:	Mesh
Primary Use:	MPI Traffic, NFS Access

Software

: --

Submit Notes

```
The config file option 'submit' was used.
submit = mpiexec -hostfile $[top]/6nodes -np ranks -genv OMP_NUM_THREADS=$threads -ppn %{NRNK} $command
```

Compiler Version Notes

```
==============================================================================
 FC  519.clvleaf_t(base) 528.pot3d_t(base) 535.weather_t(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
ifx: command line error: no files specified; for help type "ifx -help"
------------------------------------------------------------------------------

==============================================================================
 CC  505.lbm_t(base) 513.soma_t(base) 518.tealeaf_t(base) 521.miniswp_t(base)
      534.hpgmgfv_t(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
clang: warning: -Z-reserved-lib-stdc++: 'linker' input unused
  [-Wunused-command-line-argument]
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 CXXC 532.sph_exa_t(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
clang: warning: -Z-reserved-lib-stdc++: 'linker' input unused
  [-Wunused-command-line-argument]
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`mpiicc -cc=icx`

C++ benchmarks:
`mpiicpc -cxx=icx`

Fortran benchmarks:
`mpiifort  -fc=ifx`

Base Portability Flags

505.lbm_t: `-lstdc++`
513.soma_t: `-lstdc++ -DSPEC_NO_VAR_ARRAY_REDUCE`
518.tealeaf_t: `-lstdc++`
519.clvleaf_t: `-lstdc++`
521.miniswp_t: `-lstdc++`
528.pot3d_t: `-lstdc++`
532.sph_exa_t: `-lstdc++`
534.hpgmgfv_t: `-lstdc++`
535.weather_t: `-lstdc++`

Base Optimization Flags

C benchmarks:
`-Ofast -mprefer-vector-width=512 -march=core-avx2 -ipo -fiopenmp -ansi-alias`

C++ benchmarks:
`-Ofast -mprefer-vector-width=512 -march=core-avx2 -ipo -fiopenmp`

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
`-ansi-alias`

Fortran benchmarks:
`-Ofast -mprefer-vector-width=512 -march=core-avx2 -ipo -fiopenmp -nostandard-realloc-lhs -align array64byte`

Base Other Flags

C benchmarks (except as noted below):
`-Ispecmpitime`

521.miniswp_t: `-Ispecmpitime/`

534.hpgmgfv_t: `-Ispecmpitime`

C++ benchmarks:
`-Ispecmpitime`

Fortran benchmarks:

519.clvleaf_t: `-Ispecmpitime`

Peak Optimization Flags

C benchmarks:

505.lbm_t: `basepeak = yes`

513.soma_t: `basepeak = yes`

518.tealeaf_t: `basepeak = yes`

521.miniswp_t: `basepeak = yes`

534.hpgmgfv_t: `basepeak = yes`

C++ benchmarks:

532.sph_exa_t: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

519.clvleaf_t: `basepeak = yes`

528.pot3d_t: `basepeak = yes`

535.weather_t: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2022-11-10.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2022-11-10.xml`

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.7 on 2018-06-24 13:00:30-0400.
Report generated on 2023-02-22 12:25:47 by hpc2021 PDF formatter v1.0.3.
Originally published on 2023-02-22.