



# SPEC<sup>®</sup> MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI


SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 6.24

MPI2007 license: 14  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2016  
Hardware Availability: May-2016  
Software Availability: Jun-2016

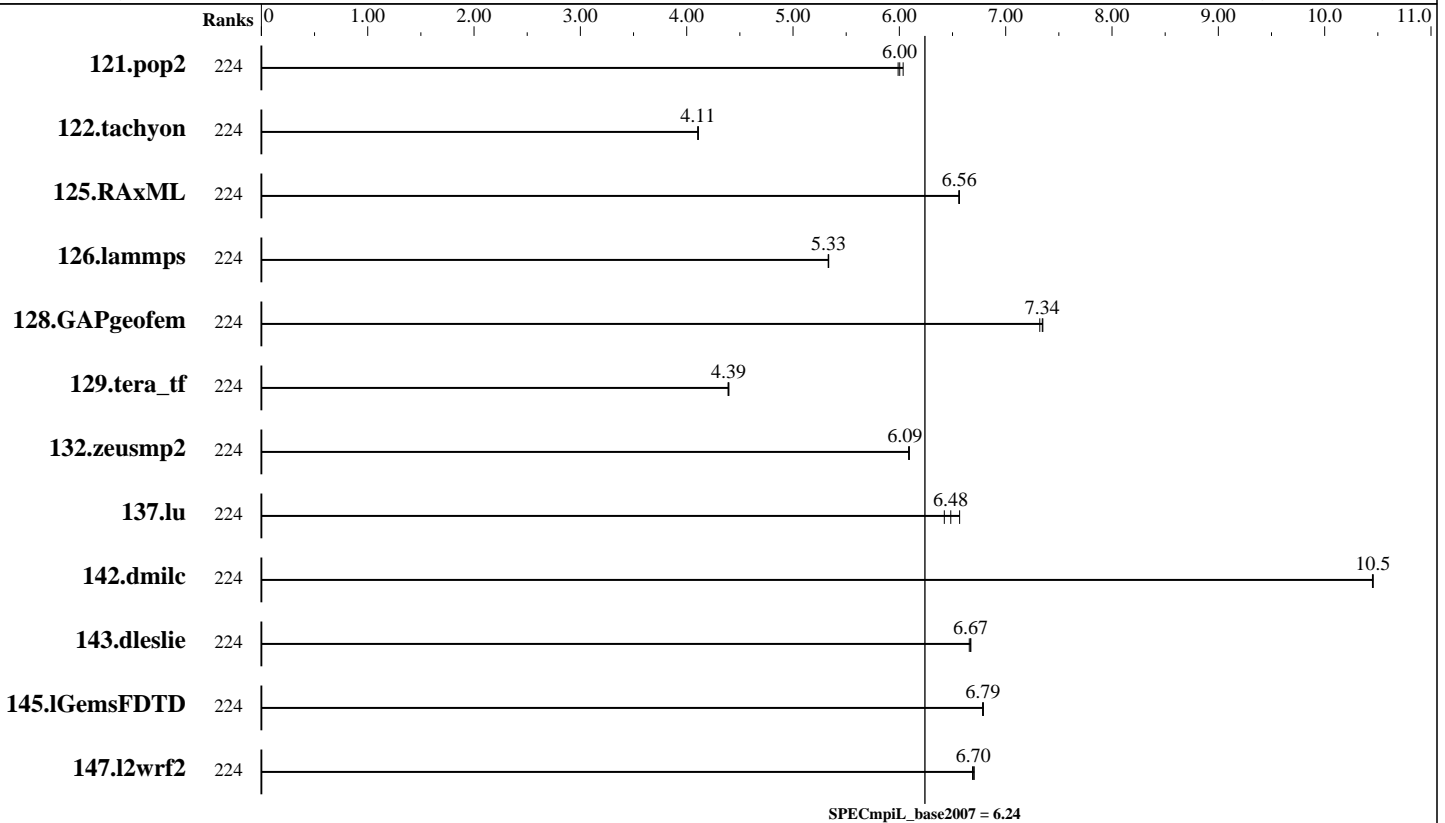

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
121.pop2	224	645	6.04	<b>648</b>	<b>6.00</b>	650	5.99									
122.tachyon	224	473	4.11	<b>473</b>	<b>4.11</b>	474	4.10									
125.RAxML	224	445	6.56	<b>445</b>	<b>6.56</b>	445	6.56									
126.lammps	224	<b>461</b>	<b>5.33</b>	461	5.33	461	5.33									
128.GAPgeofem	224	<b>808</b>	<b>7.34</b>	811	7.32	807	7.35									
129.tera_tf	224	250	4.40	250	4.39	<b>250</b>	<b>4.39</b>									
132.zeusmp2	224	<b>348</b>	<b>6.09</b>	348	6.09	348	6.09									
137.lu	224	640	6.57	654	6.42	<b>648</b>	<b>6.48</b>									
142.dmilc	224	352	10.5	353	10.4	<b>352</b>	<b>10.5</b>									
143.dleslie	224	<b>465</b>	<b>6.67</b>	466	6.66	465	6.67									
145.lGemsFDTD	224	650	6.79	650	6.78	<b>650</b>	<b>6.79</b>									
147.l2wrf2	224	1224	6.70	1227	6.69	<b>1225</b>	<b>6.70</b>									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 6.24

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: May-2016

Software Availability: Jun-2016

### Hardware Summary

Type of System: Homogeneous  
 Compute Node: SGI ICE XA IP-125 CS  
 Interconnect: InfiniBand (MPI and I/O)  
 File Server Node: SGI MIS Server  
 Total Compute Nodes: 4  
 Total Chips: 8  
 Total Cores: 112  
 Total Threads: 224  
 Total Memory: 512 GB  
 Base Ranks Run: 224  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C++ Composer XE 2016 for Linux, Version 16.0.3.210 Build 20160415  
 C++ Compiler: Intel C++ Composer XE 2016 for Linux Version 16.0.3.210 Build 20160405  
 Fortran Compiler: Intel Fortran Composer XE 2016 for Linux, Version 16.0.3.210 Build 20160405  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: SGI MPT 2.14 Patch 11328  
 Other MPI Info: OFED 3.2.2  
 Pre-processors: None  
 Other Software: None

## Node Description: SGI ICE XA IP-125 CS

### Hardware

Number of nodes: 4  
 Uses of the node: compute  
 Vendor: SGI  
 Model: SGI ICE XA (Intel Xeon E5-2690 v4, 2.6 GHz)  
 CPU Name: Intel Xeon E5-2690 v4  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 28  
 Cores per chip: 14  
 Threads per core: 2  
 CPU Characteristics: 14 Core, 2.60 GHz, 9.6 GT/s QPI  
 Intel Turbo Boost Technology up to 3.50 GHz  
 Hyper-Threading Technology enabled  
 CPU MHz: 2600  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: None  
 Other Hardware: None  
 Adapter: Mellanox MT27700 with ConnectX-4 ASIC (PCIe x16 Gen3 8 GT/s)  
 Number of Adapters: 2  
 Slot Type: PCIe x16 Gen3  
 Data Rate: InfiniBand 4X EDR  
 Ports Used: 1  
 Interconnect Type: InfiniBand

### Software

Adapter: Mellanox MT27700 with ConnectX-4 ASIC (PCIe x16 Gen3 8 GT/s)  
 Adapter Driver: OFED-3.2.1.5.3  
 Adapter Firmware: 12.14.0114  
 Operating System: SUSE Linux Enterprise Server 11 SP4 (x86\_64), Kernel 3.0.101-71.1.10690.1.PTF-default  
 Local File System: NFSv3  
 Shared File System: NFSv3 IPoIB  
 System State: Multi-user, run level 3  
 Other Software: SGI Tempo Compute Node 3.3.0, Build 714r18.sles11sp4-1604041900



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 6.24

MPI2007 license: 14  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2016  
Hardware Availability: May-2016  
Software Availability: Jun-2016

### Node Description: SGI MIS Server

Hardware		Software	
Number of nodes:	1	Adapter:	Mellanox MT27500 with ConnectX-3 ASIC
Uses of the node:	fileserver	Adapter Driver:	OFED-3.2.0.1.1
Vendor:	SGI	Adapter Firmware:	2.36.5000
Model:	SGI MIS Server	Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 3.0.101-0.46-default
CPU Name:	Intel Xeon E5-2670	Local File System:	xf
CPU(s) orderable:	1-2 chips	Shared File System:	--
Chips enabled:	2	System State:	Multi-user, run level 3
Cores enabled:	16	Other Software:	SGI Foundation Software 2.9, Build 711r2.sles11sp3-1411192056
Cores per chip:	8		
Threads per core:	1		
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz Hyper-Threading Technology disabled		
CPU MHz:	1200		
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	256 KB I+D on chip per core		
L3 Cache:	20 MB I+D on chip per chip		
Other Cache:	None		
Memory:	128 GB (12 * 8 GB 2Rx4 PC3-12800R-11, ECC)		
Disk Subsystem:	45 TB RAID 6 8 x 6+2 900GB (WD, 10K RPM)		
Other Hardware:	None		
Adapter:	Mellanox MT27500 with ConnectX-3 ASIC		
Number of Adapters:	2		
Slot Type:	PCIe x8 Gen3		
Data Rate:	InfiniBand 4X FDR		
Ports Used:	2		
Interconnect Type:	InfiniBand		

### Interconnect Description: InfiniBand (MPI and I/O)

Hardware		Software
Vendor:	Mellanox Technologies and SGI	
Model:	None	
Switch Model:	SGI P0002145	
Number of Switches:	2	
Number of Ports:	36	
Data Rate:	InfiniBand 4x EDR	
Firmware:	11.0350.0394	
Topology:	Enhanced Hypercube	
Primary Use:	MPI and I/O traffic	



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 6.24

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: May-2016

Software Availability: Jun-2016

## Submit Notes

The config file option 'submit' was used.

## General Notes

### Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_IB_RAILS=2
export MPI_IB_UPGRADE_SENDS=50
export MPI_IB_IMM_UPGRADE=false
export MPI_IB_DCIS=2
export MPI_CONNECTIONS_THRESHOLD=0
export MPI_IB_MTU=4096
ulimit -s unlimited
```

### BIOS settings:

```
AMI BIOS version HA012036
Hyper-Threading Technology enabled
Intel Turbo Boost Technology enabled (default)
Transparent Hugepages Enabled
```

### Job Placement:

Each MPI job was assigned to a topologically compact set of nodes with 28 ranks per socket.

### Additional notes regarding interconnect:

The Infiniband network consists of two independent planes, with half the switches in the system allocated to each plane. I/O traffic is restricted to one plane, while MPI traffic can use both planes.

## Base Compiler Invocation

### C benchmarks:

icc

### C++ benchmarks:

126.lammps: icpc

### Fortran benchmarks:

ifort

### Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 6.24

MPI2007 license: 14  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2016  
Hardware Availability: May-2016  
Software Availability: Jun-2016

## Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX2 -no-prec-div

## Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel14\\_flags.20140908.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel14_flags.20140908.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel14\\_flags.20140908.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel14_flags.20140908.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Fri Aug 19 11:45:13 2016 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 19 August 2016.