



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 35.3

MPI2007 license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Apr-2019

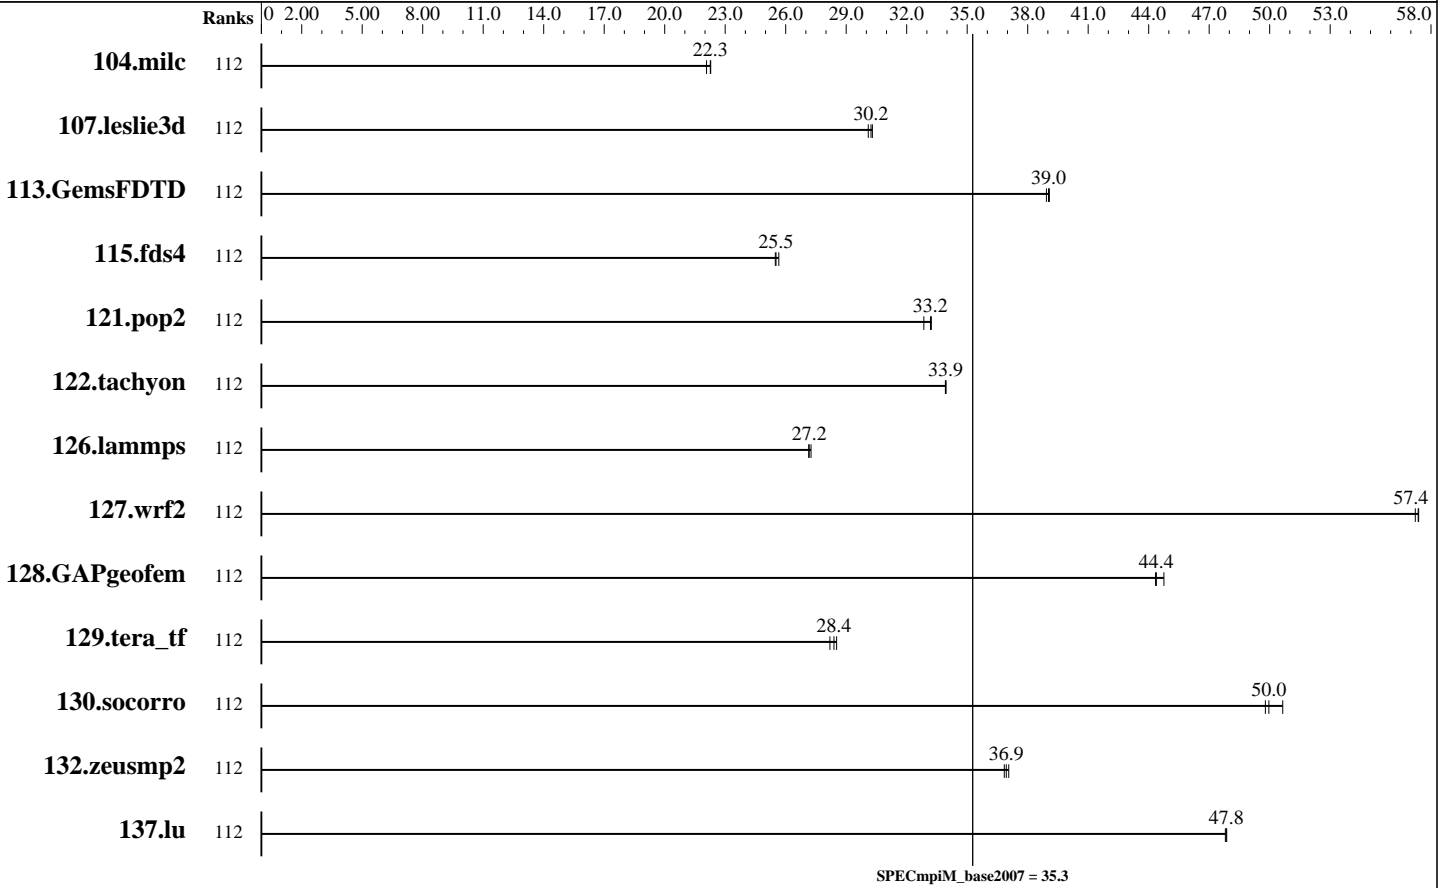

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	112	70.2	22.3	<u>70.3</u>	<u>22.3</u>	70.9	22.1									
107.leslie3d	112	172	30.3	<u>173</u>	<u>30.2</u>	173	30.1									
113.GemsFDTD	112	162	38.9	161	39.1	<u>162</u>	<u>39.0</u>									
115.fds4	112	76.6	25.5	<u>76.4</u>	<u>25.5</u>	76.0	25.7									
121.pop2	112	124	33.2	<u>124</u>	<u>33.2</u>	126	32.9									
122.tachyon	112	82.5	33.9	82.4	34.0	<u>82.4</u>	<u>33.9</u>									
126.lammps	112	107	27.3	<u>107</u>	<u>27.2</u>	107	27.1									
127.wrf2	112	<u>136</u>	<u>57.4</u>	136	57.4	136	57.2									
128.GAPgeofem	112	46.1	44.8	<u>46.5</u>	<u>44.4</u>	46.6	44.3									
129.tera_tf	112	<u>97.5</u>	<u>28.4</u>	97.0	28.5	98.2	28.2									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiM_peak2007 = Not Run

ThinkSystem SR650
(Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 35.3

MPI2007 license: 28

Test date: Mar-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Apr-2019

Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	112	75.4	50.6	76.7	49.8	76.4	50.0							
132.zeusmp2	112	83.7	37.1	84.2	36.8	84.0	36.9							
137.lu	112	76.9	47.8	76.8	47.9	76.8	47.8							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: ThinkSystem SR650
 Interconnect: Intel Omni-Path
 File Server Node: NFS
 Total Compute Nodes: 2
 Total Chips: 4
 Total Cores: 112
 Total Threads: 112
 Total Memory: 1536 GB
 Base Ranks Run: 112
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

Software Summary

C Compiler: Intel C++ Compiler 17.0 Update 7 for Linux
 Version 17.0.7 Build 20180403
 C++ Compiler: Intel C++ Compiler 17.0 Update 7 for Linux
 Version 17.0.7 Build 20180403
 Fortran Compiler: Intel Fortran Compiler 17.0 Update 7 for Linux
 Version 17.0.7 Build 20180403
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 MPI Library: Intel MPI Library for Linux* OS
 Version 2018 Update 3 Build 20180411
 Other MPI Info: None
 Pre-processors: No
 Other Software: None

Node Description: ThinkSystem SR650

Hardware

Number of nodes: 2
 Uses of the node: compute
 Vendor: Lenovo Global Technology
 Model: SR650
 CPU Name: Intel Xeon Platinum 8280
 CPU(s) orderable: 1-2 chips
 Chips enabled: 2
 Cores enabled: 56
 Cores per chip: 28
 Threads per core: 1
 CPU Characteristics: None
 CPU MHz: 2700
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Disk Subsystem: 1 x 1 TB 12 Gbps SAS 2.5" SSD (JBOD)
 Other Hardware: ThinkSystem RAID 530-8i 2GB Flash
 Adapter: Intel Omni-Path 100 Series Single-port PCIe 3.0 x16 HFA
 Number of Adapters: 1
 Slot Type: PCI-Express Gen3 x16
 Data Rate: 100 Gb/s

Software

Adapter: Intel Omni-Path 100 Series Single-port PCIe 3.0 x16 HFA
 Adapter Driver: IFS 10.9.1.0.15
 Adapter Firmware: 10.9.0.1.0
 Operating System: Red Hat Enterprise Linux Server release 7.6, Kernel 3.10.0-957.el7.x86_64
 Local File System: xfs
 Shared File System: nfs
 System State: Multi-user, run level 3
 Other Software: NONE

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiM_peak2007 = Not Run

ThinkSystem SR650
(Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 35.3

MPI2007 license: 28

Test date: Mar-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Apr-2019

Node Description: ThinkSystem SR650

Ports Used: 1
Interconnect Type: Intel Omni-Path Fabric 100 Series

Node Description: NFS

Hardware

Number of nodes: 1
 Uses of the node: Fileserver
 Vendor: Lenovo Global Technology
 Model: ThinkSystem SR650
 CPU Name: Intel Xeon Platinum 8280
 CPU(s) orderable: 1-2 chips
 Chips enabled: 2
 Cores enabled: 56
 Cores per chip: 28
 Threads per core: 1
 CPU Characteristics: None
 CPU MHz: 2700
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Disk Subsystem: 1 x 1 TB 12 Gbps SAS 2.5" SSD (JBOD)
 Other Hardware: None
 Adapter: Intel Omni-Path 100 Series Single-port PCIe 3.0 x16 HFA
 Number of Adapters: 1
 Slot Type: PCI-Express 3.0 x16
 Data Rate: 100 Gb/s
 Ports Used: 1
 Interconnect Type: Intel Omni-Path Fabric 100 series

Software

Adapter: Intel Omni-Path 100 Series Single-port PCIe 3.0 x16 HFA
 Adapter Driver: 10.9.1.0.15
 Adapter Firmware: 10.9.0.1.0
 Operating System: Red Hat Enterprise Linux Server release 7.6
 Local File System: None
 Shared File System: NFS
 System State: Multi-User, run level 3
 Other Software: None

Interconnect Description: Intel Omni-Path

Hardware

Vendor: Intel
 Model: Intel Omni-Path Fabric 100 Series
 Switch Model: Intel Omni-Path Edge Switch 100 Series 48 Port 2 PSU
 Number of Switches: 1
 Number of Ports: 48
 Data Rate: 100 Gb/s
 Firmware: 10.3.0.0.60
 Topology: Mesh
 Primary Use: MPI Traffic

Software



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiM_peak2007 = Not Run

ThinkSystem SR650
(Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 35.3

MPI2007 license: 28

Test date: Mar-2019

Test sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Apr-2019

Submit Notes

The config file option 'submit' was used.

General Notes

MPI startup command:
mpiexec command was used to start MPI jobs.

RAM configuration:
Compute nodes have 2 x 32 GB RDIMM on each memory channel.

BIOS settings:
Operating Mode : Maximum Performance Mode
Intel Hyper-Threading Technology (SMT): Disabled
SNC (Sub-NUMA Cluster): Enable

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:
mpiifort

Benchmarks using both Fortran and C:
mpiicc mpiifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG
126.lammps: -DMPICH_IGNORE_CXX_SEEK
127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 35.3

MPI2007 license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Apr-2019

Base Portability Flags (Continued)

130.socorro: -assume nostd_intent_in

Base Optimization Flags

C benchmarks:

-O3 -ipo -xCORE-AVX512 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -ipo -xCORE-AVX512 -no-prec-div

Fortran benchmarks:

-O3 -ipo -xCORE-AVX512 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -ipo -xCORE-AVX512 -no-prec-div

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20170711.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20170711.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.
Report generated on Tue Apr 2 18:30:12 2019 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 2 April 2019.