



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

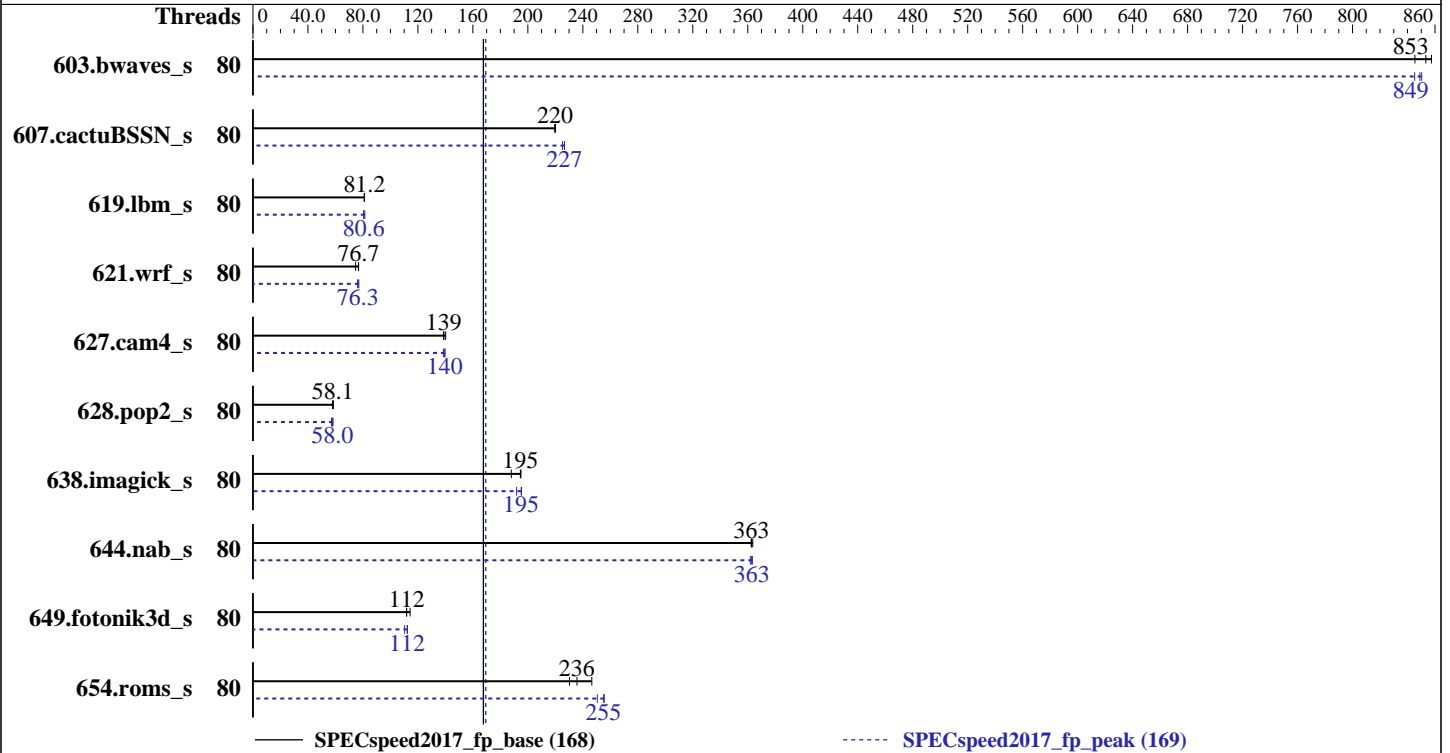

Hardware

CPU Name: Intel Xeon Gold 6148
 Max MHz.: 3700
 Nominal: 2400
 Enabled: 80 cores, 4 chips
 Orderable: 2,4 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 600 GB SAS HDD, 10K RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 3.2.2a released Sep-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	80	68.8	857	<u>69.1</u>	<u>853</u>	69.8	845	80	69.8	845	<u>69.5</u>	<u>849</u>	69.4	850
607.cactuBSSN_s	80	75.9	220	75.7	220	<u>75.8</u>	<u>220</u>	80	74.0	225	73.5	227	<u>73.6</u>	<u>227</u>
619.lbm_s	80	64.5	81.2	64.8	80.9	<u>64.5</u>	<u>81.2</u>	80	<u>65.0</u>	<u>80.6</u>	65.0	80.6	64.4	81.4
621.wrf_s	80	<u>172</u>	<u>76.7</u>	172	76.9	177	74.7	80	174	76.1	<u>173</u>	<u>76.3</u>	172	77.0
627.cam4_s	80	63.9	139	63.2	140	<u>63.8</u>	<u>139</u>	80	64.0	139	63.4	140	<u>63.5</u>	<u>140</u>
628.pop2_s	80	203	58.5	<u>204</u>	<u>58.1</u>	205	57.9	80	<u>205</u>	<u>58.0</u>	204	58.2	208	57.1
638.imagick_s	80	<u>74.1</u>	<u>195</u>	74.0	195	76.7	188	80	73.8	195	<u>73.9</u>	<u>195</u>	75.2	192
644.nab_s	80	<u>48.2</u>	<u>363</u>	48.2	362	48.0	364	80	<u>48.2</u>	<u>363</u>	48.1	363	48.3	362
649.fotonik3d_s	80	79.7	114	<u>81.5</u>	<u>112</u>	81.6	112	80	<u>81.2</u>	<u>112</u>	82.6	110	81.1	112
654.roms_s	80	63.9	247	<u>66.8</u>	<u>236</u>	68.4	230	80	61.6	256	62.8	251	<u>61.7</u>	<u>255</u>

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/opt/cpu2017/lib/ia32:/opt/cpu2017/lib/intel64:/opt/cpu2017/je5.0.1-32:/opt/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

General Notes (Continued)

generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Disabled
CPU performance set to Enterprise
Power Performance Tuning set to OS Controls
SNC set to Disabled
Patrol Scrub set to Disabled
Sysinfo program /opt/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-qiwr Mon Nov 27 09:19:14 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 80
On-line CPU(s) list: 0-79
Thread(s) per core: 1
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

Core(s) per socket:    20
Socket(s):             4
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
Stepping:              4
CPU MHz:               2964.203
CPU max MHz:           3700.0000
CPU min MHz:           1000.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              28160K
NUMA node0 CPU(s):    0-19
NUMA node1 CPU(s):    20-39
NUMA node2 CPU(s):    40-59
NUMA node3 CPU(s):    60-79
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm hwp
hwp_act_window hwp_epp hwp_pkg_req intel_pt tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 28160 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
node 0 size: 191927 MB
node 0 free: 190366 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
node 1 size: 193521 MB
node 1 free: 188727 MB
node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59
node 2 size: 193521 MB
node 2 free: 192242 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```
node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
node 3 size: 193518 MB
node 3 free: 192255 MB
node distances:
node 0 1 2 3
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10
```

```
From /proc/meminfo
MemTotal: 791028648 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-qiwr 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 4 06:35

```
SPEC is set to: /opt/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda1 xfs 280G 144G 136G 52% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. B480M5.3.2.2a.0.0919171641 09/19/2017
Memory:

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 619.lbm_s(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148,
2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:

`icc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`ifort icc`

Benchmarks using Fortran, C, and C++:

`icpc icc ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP`

`638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP`

`644.nab_s: Same as 638.imagick_s`

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp  
-nonstandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nonstandard-realloc-lhs  
-align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B480 M5 (Intel Xeon Gold 6148, 2.40 GHz)

SPECspeed2017_fp_base = 168

SPECspeed2017_fp_peak = 169

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-27 09:19:14-0500.

Report generated on 2018-10-31 16:57:31 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-23.