



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

**SPECspeed2017\_fp\_base = 119**

**SPECspeed2017\_fp\_peak = Not Run**

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2018

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

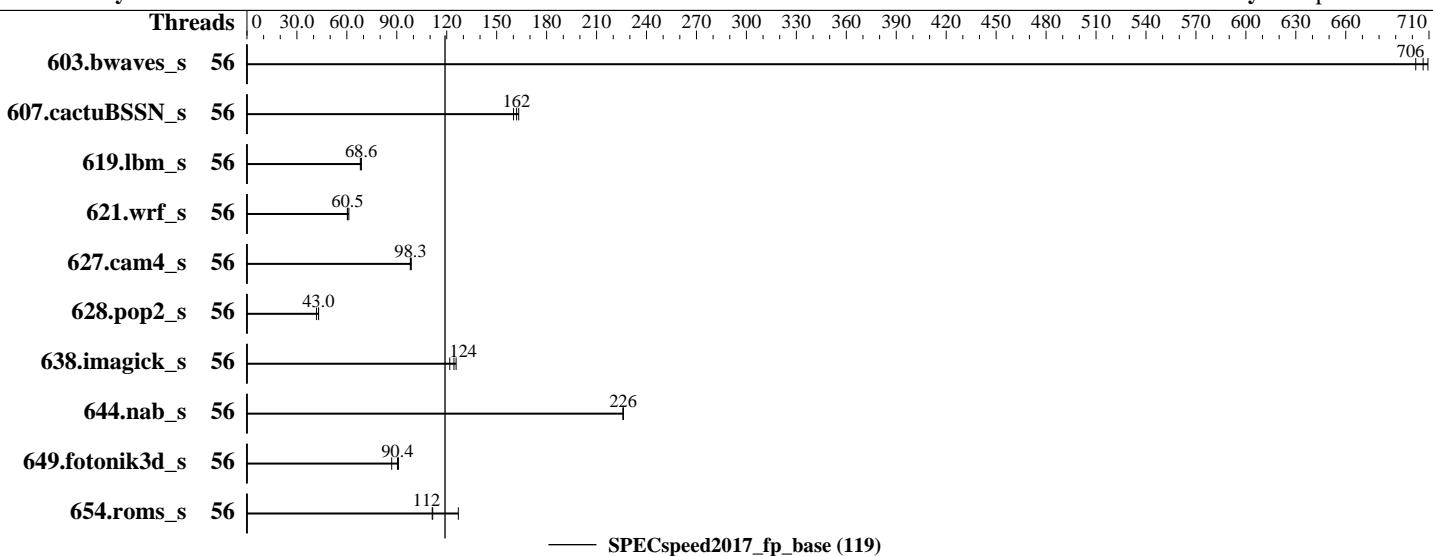

## Hardware

CPU Name: Intel Xeon Gold 5120  
 Max MHz.: 3200  
 Nominal: 2200  
 Enabled: 56 cores, 4 chips  
 Orderable: 1, 2, 4 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 19.25 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)  
 Storage: 1 x 480 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Compiler: Kernel 3.10.0-693.el7.x86\_64  
 C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: HPE BIOS Version U34 released Nov-2017 (tested as U34 11/14/2017)  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

**SPECspeed2017\_fp\_base = 119**

**SPECspeed2017\_fp\_peak = Not Run**

CPU2017 License: 3

Test Date: Feb-2018

Test Sponsor: HPE

Hardware Availability: Nov-2017

Tested by: HPE

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	56	84.0	702	83.2	709	<b>83.5</b>	<b>706</b>							
607.cactuBSSN_s	56	104	160	102	163	<b>103</b>	<b>162</b>							
619.lbm_s	56	76.3	68.7	76.9	68.1	<b>76.4</b>	<b>68.6</b>							
621.wrf_s	56	<b>219</b>	<b>60.5</b>	219	60.3	216	61.2							
627.cam4_s	56	90.3	98.1	<b>90.2</b>	<b>98.3</b>	89.8	98.7							
628.pop2_s	56	276	43.0	<b>276</b>	<b>43.0</b>	284	41.8							
638.imagick_s	56	115	126	118	122	<b>116</b>	<b>124</b>							
644.nab_s	56	77.4	226	77.3	226	<b>77.3</b>	<b>226</b>							
649.fotonik3d_s	56	<b>101</b>	<b>90.4</b>	105	86.9	100	91.0							
654.roms_s	56	124	127	142	111	<b>141</b>	<b>112</b>							
<b>SPECspeed2017_fp_base = 119</b>														
<b>SPECspeed2017_fp_peak = Not Run</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set with "tuned-adm profile throughput-performance"
```

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=core,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

**SPECspeed2017\_fp\_base = 119**

**SPECspeed2017\_fp\_peak = Not Run**

CPU2017 License: 3

**Test Date:** Feb-2018

Test Sponsor: HPE

**Hardware Availability:** Nov-2017

Tested by: HPE

**Software Availability:** Sep-2017

## Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Stale A to S set to Enabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Workload Profile set to Custom

NUMA Group Size Optimization set to Flat

Uncore Frequency Scaling set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on dl580\_jk\_rhel74 Thu Feb 1 23:09:37 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz

4 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 14

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 56

On-line CPU(s) list: 0-55

Thread(s) per core: 1

Core(s) per socket: 14

Socket(s): 4

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL580 Gen10 (2.20 GHz, Intel Xeon Gold 5120)	<b>SPECspeed2017_fp_base = 119</b>
	<b>SPECspeed2017_fp_peak = Not Run</b>
CPU2017 License: 3	<b>Test Date:</b> Feb-2018
Test Sponsor: HPE	<b>Hardware Availability:</b> Nov-2017
Tested by: HPE	<b>Software Availability:</b> Sep-2017

## Platform Notes (Continued)

```

Stepping: 4
CPU MHz: 2200.000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0-13
NUMA node1 CPU(s): 14-27
NUMA node2 CPU(s): 28-41
NUMA node3 CPU(s): 42-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2
erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc
cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts

```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

From numactl --hardware   WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13
node 0 size: 196267 MB
node 0 free: 191764 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 1 size: 196608 MB
node 1 free: 192064 MB
node 2 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41
node 2 size: 196608 MB
node 2 free: 192126 MB
node 3 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55
node 3 size: 196607 MB
node 3 free: 192234 MB
node distances:
node 0 1 2 3
 0: 10 21 21 21
 1: 21 10 21 21
 2: 21 21 10 21
 3: 21 21 21 10

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL580 Gen10 (2.20 GHz, Intel Xeon Gold 5120)	<b>SPECspeed2017_fp_base = 119</b>
	<b>SPECspeed2017_fp_peak = Not Run</b>
CPU2017 License: 3	<b>Test Date:</b> Feb-2018
Test Sponsor: HPE	<b>Hardware Availability:</b> Nov-2017
Tested by: HPE	<b>Software Availability:</b> Sep-2017

## Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:      792288896 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux dl580_jk_rhel74 3.10.0-693.el7.x86_64 #1 SMP Thu Jul 6 19:56:57 EDT 2017 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Feb 1 23:05

SPEC is set to: /home/cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs    57G   31G   27G  54% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE U34 11/14/2017
  Memory:
    48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
icc (ICC) 18.0.0 20170811
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017\_fp\_base = 119

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2018

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 607.cactuBSSN\_s(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

fort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

**SPECspeed2017\_fp\_base = 119**

**SPECspeed2017\_fp\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2018

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017\_fp\_base = 119

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2018

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-02-01 12:39:37-0500.

Report generated on 2018-10-31 17:06:41 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-11.