



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation


SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: May-2018
Hardware Availability: Jan-2018
Software Availability: Mar-2018

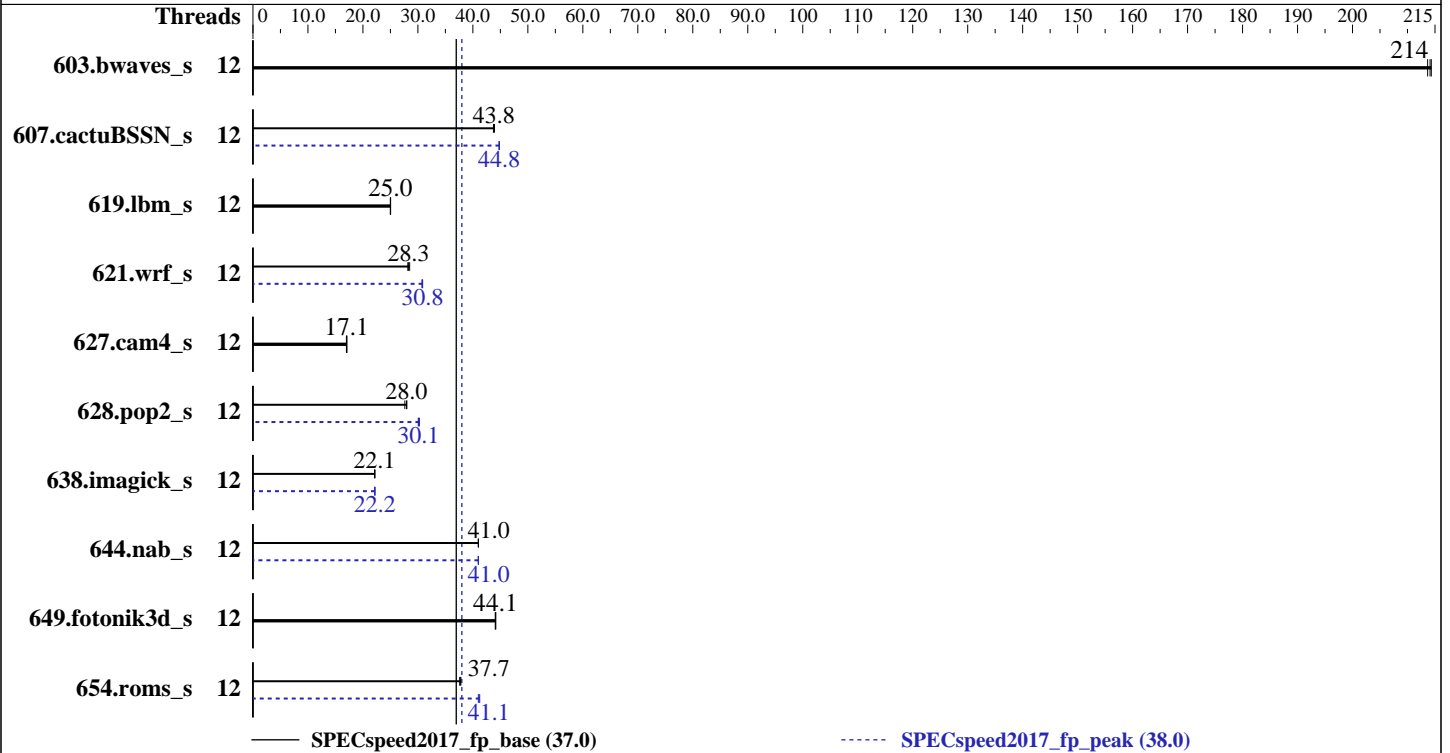

Hardware

CPU Name: Intel Xeon Bronze 3104
Max MHz.: 1700
Nominal: 1700
Enabled: 12 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 8.25 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2133)
Storage: 1 x 1 TB SATA, 7200 RPM
Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
Kernel 3.10.0-693.21.1.el7.x86_64
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: Yes
Firmware: Version F21 02/22/2018 released Apr-2018
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECSpeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECSpeed2017_fp_peak = 38.0

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: May-2018
Hardware Availability: Jan-2018
Software Availability: Mar-2018

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|------------|-------------|------------|-------------|------------|-------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 12 | 276 | 214 | 276 | 214 | 275 | 214 | 12 | 276 | 214 | 276 | 214 | 275 | 214 |
| 607.cactuBSSN_s | 12 | 381 | 43.7 | 381 | 43.8 | 379 | 43.9 | 12 | 372 | 44.8 | 372 | 44.8 | 372 | 44.8 |
| 619.lbm_s | 12 | 210 | 25.0 | 209 | 25.0 | 210 | 25.0 | 12 | 210 | 25.0 | 209 | 25.0 | 210 | 25.0 |
| 621.wrf_s | 12 | 467 | 28.3 | 470 | 28.2 | 464 | 28.5 | 12 | 429 | 30.9 | 429 | 30.8 | 430 | 30.7 |
| 627.cam4_s | 12 | 519 | 17.1 | 521 | 17.0 | 520 | 17.1 | 12 | 519 | 17.1 | 521 | 17.0 | 520 | 17.1 |
| 628.pop2_s | 12 | 430 | 27.6 | 424 | 28.0 | 425 | 28.0 | 12 | 395 | 30.1 | 392 | 30.3 | 394 | 30.1 |
| 638.imagick_s | 12 | 652 | 22.1 | 650 | 22.2 | 652 | 22.1 | 12 | 650 | 22.2 | 652 | 22.1 | 650 | 22.2 |
| 644.nab_s | 12 | 426 | 41.0 | 426 | 41.0 | 426 | 41.0 | 12 | 426 | 41.0 | 426 | 41.0 | 426 | 41.0 |
| 649.fotonik3d_s | 12 | 206 | 44.2 | 207 | 44.1 | 207 | 44.1 | 12 | 206 | 44.2 | 207 | 44.1 | 207 | 44.1 |
| 654.roms_s | 12 | 416 | 37.8 | 419 | 37.6 | 417 | 37.7 | 12 | 384 | 41.0 | 382 | 41.2 | 383 | 41.1 |

SPECSpeed2017_fp_base = 37.0

SPECSpeed2017_fp_peak = 38.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Platform Notes

BIOS Settings:

ENERGY_PERF_BIAS_CFG mode: Performance
 LLC dead line alloc: Disable
 Patrol Scrub: Disable
 DCU Streamer Prefetcher: Disable
 Adjacent Cache Prefetch: Disable
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on dl20h Wed May 30 08:23:34 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
 2 "physical id"s (chips)
 12 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 6
 siblings : 6
 physical 0: cores 0 1 2 3 4 5
 physical 1: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86_64
 CPU op-mode(s): 32-bit, 64-bit
 Byte Order: Little Endian
 CPU(s): 12
 On-line CPU(s) list: 0-11
 Thread(s) per core: 1
 Core(s) per socket: 6
 Socket(s): 2
 NUMA node(s): 2
 Vendor ID: GenuineIntel
 CPU family: 6
 Model: 85
 Model name: Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
 Stepping: 4
 CPU MHz: 1513.664
 CPU max MHz: 1700.0000
 CPU min MHz: 800.0000
 BogoMIPS: 3400.00
 Virtualization: VT-x
 L1d cache: 32K
 L1i cache: 32K

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Platform Notes (Continued)

L2 cache: 1024K

L3 cache: 8448K

NUMA node0 CPU(s): 0-5

NUMA node1 CPU(s): 6-11

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req

/proc/cpuinfo cache data
cache size : 8448 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 195236 MB
node 0 free: 190391 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 196608 MB
node 1 free: 192070 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10
```

From /proc/meminfo
MemTotal: 394644656 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Platform Notes (Continued)

```
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux dl20h 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 May 30 08:17

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  909G  334G  529G   39% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS GIGABYTE F21 02/22/2018

Memory:

```
4x NO DIMM NO DIMM
1x SK Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666, configured at 2133
11x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2133
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 619.lbm_s(peak)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
FC 607.cactuBSSN_s(base)  
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 607.cactuBSSN_s(peak)
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 621.wrf_s(peak) 628.pop2_s(peak)
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:

-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

`-nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only`

`-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP`

`-nostandard-realloc-lhs -align array32byte`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only`

`-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP`

`-nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:

`-m64 -std=c11`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:

`icc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`ifort icc`

Benchmarks using Fortran, C, and C++:

`icpc icc ifort`



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-qopenmp -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4_s: basepeak = yes

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017_fp_base = 37.0

Express5800/D120h (Intel Xeon Bronze 3104)

SPECspeed2017_fp_peak = 38.0

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: May-2018

Hardware Availability: Jan-2018

Software Availability: Mar-2018

Peak Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-D120h-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-29 19:23:33-0400.

Report generated on 2018-10-31 17:24:50 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.