



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro


SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

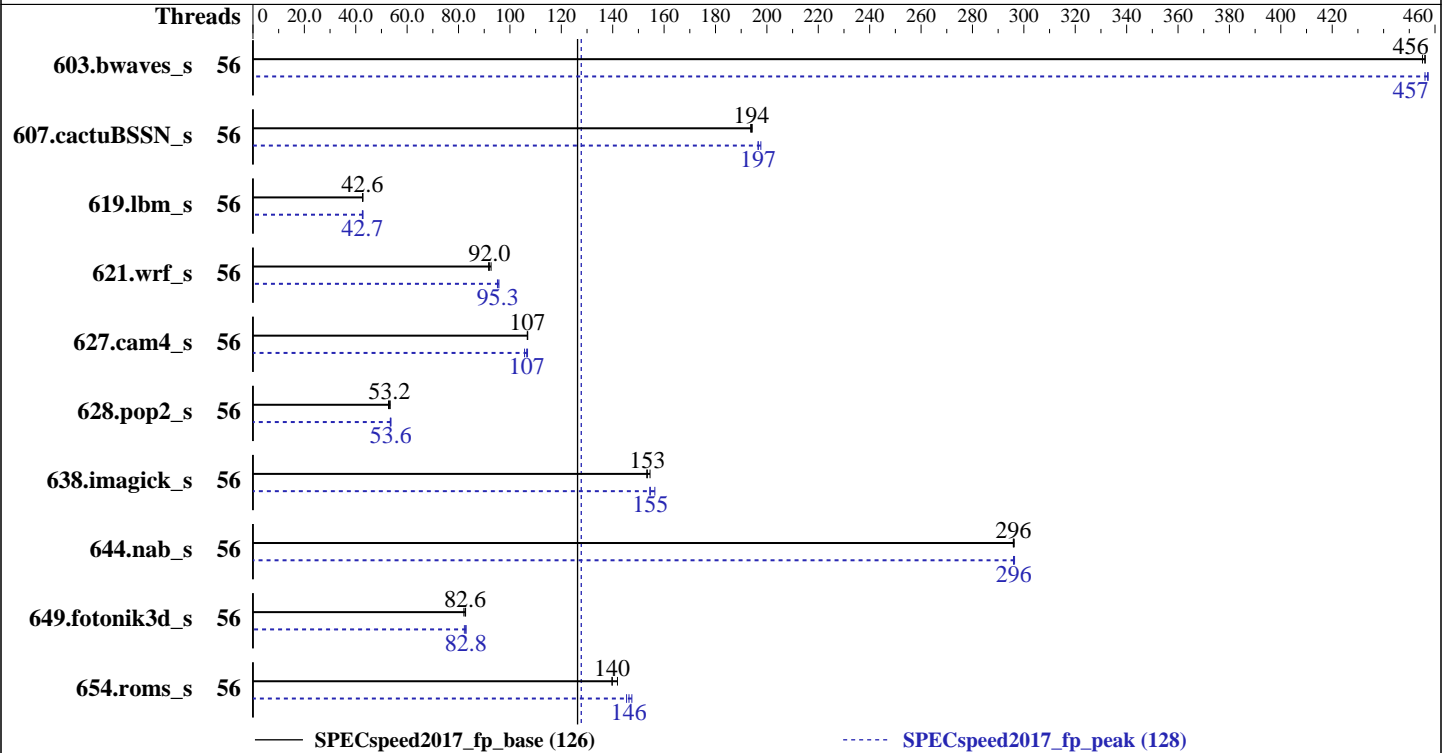

### Hardware

CPU Name: Intel Xeon Platinum 8180  
 Max MHz.: 3800  
 Nominal: 2500  
 Enabled: 56 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 200 GB SATAIII SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 Kernel 4.4.114-94.11-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Supermicro BIOS version 2.0b released Apr-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	129	456	130	455	<u>129</u>	<u>456</u>	56	129	456	129	457	<u>129</u>	<u>457</u>
607.cactuBSSN_s	56	85.8	194	86.1	194	<u>85.9</u>	<u>194</u>	56	84.8	197	<u>84.8</u>	<u>197</u>	84.3	198
619.lbm_s	56	<u>123</u>	<u>42.6</u>	123	42.6	122	42.8	56	122	42.8	123	42.6	<u>123</u>	<u>42.7</u>
621.wrf_s	56	<u>144</u>	<u>92.0</u>	144	91.7	143	92.7	56	138	95.7	<u>139</u>	<u>95.3</u>	139	95.2
627.cam4_s	56	83.0	107	<u>83.0</u>	<u>107</u>	82.9	107	56	83.9	106	<u>83.2</u>	<u>107</u>	82.9	107
628.pop2_s	56	<u>223</u>	<u>53.2</u>	222	53.4	225	52.7	56	<u>221</u>	<u>53.6</u>	221	53.6	222	53.4
638.imagick_s	56	94.1	153	93.4	155	<u>94.0</u>	<u>153</u>	56	93.4	154	92.2	156	<u>93.3</u>	<u>155</u>
644.nab_s	56	<u>59.0</u>	<u>296</u>	59.0	296	59.0	296	56	59.0	296	59.0	296	<u>59.0</u>	<u>296</u>
649.fotonik3d_s	56	<u>110</u>	<u>82.6</u>	111	82.1	110	82.7	56	111	82.3	<u>110</u>	<u>82.8</u>	110	82.9
654.roms_s	56	111	142	<u>113</u>	<u>140</u>	113	140	56	<u>108</u>	<u>146</u>	108	145	107	147

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Hyper-Threading = Disable

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

LLC prefetch = Enable  
Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
Hardware P-state = Out of Band Mode  
XPT Prefetch = Enable  
Stale AtoS = Enable  
LLC dead line alloc = Disable  
SDDC Plus One = Disable  
ADDDC Sparing = Disable  
Patrol Scrub = Disable  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-k7zv Fri Jun 1 22:42:12 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz  
2 "physical id"s (chips)  
56 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 28  
siblings : 28  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 56  
On-line CPU(s) list: 0-55  
Thread(s) per core: 1  
Core(s) per socket: 28  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz  
Stepping: 4

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

### Platform Notes (Continued)

CPU MHz: 2500.000  
BogoMIPS: 5000.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 39424K  
NUMA node0 CPU(s): 0-27  
NUMA node1 CPU(s): 28-55

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm hwp\_epp intel\_pt rsb\_ctxsw spec\_ctrl retpoline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc pku ospke

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 192089 MB
node 0 free: 186319 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 193515 MB
node 1 free: 191219 MB
node distances:
node  0  1
0:  10  21
1:  21  10
```

```
From /proc/meminfo
MemTotal: 394859192 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

## Platform Notes (Continued)

```

PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-k7zv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 1 14:43

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   145G   19G  126G  13% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS American Megatrends Inc. 2.0b 04/18/2018
Memory:
4x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

```

## Compiler Version Notes

```

=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 619.lbm_s(peak)
-----

icc (ICC) 18.0.0 20170811

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

### Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 607.cactuBSSN\_s(base)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 607.cactuBSSN\_s(peak)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 603.bwaves\_s(peak) 649.fotonik3d\_s(peak) 654.roms\_s(peak)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

CC 621.wrf\_s(base) 627.cam4\_s(base, peak) 628.pop2\_s(base)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

## Compiler Version Notes (Continued)

=====  
CC 621.wrf\_s(peak) 628.pop2\_s(peak)  
=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:  
icc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
ifort icc

Benchmarks using Fortran, C, and C++:  
icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

(Continued on next page)





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP
```

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp  
-nonstandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 7049GP-TRT (X11DPG-QT , Intel Xeon Platinum 8180)

SPECspeed2017\_fp\_base = 126

SPECspeed2017\_fp\_peak = 128

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

## Peak Optimization Flags (Continued)

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs  
-align array32byte
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-01 10:42:11-0400.

Report generated on 2018-10-31 17:28:51 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.