



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECspeed2017_fp_base = 193

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3


Test Date: Aug-2018

Test Sponsor: HPE

Hardware Availability: Jun-2018

Tested by: HPE

Software Availability: Mar-2018

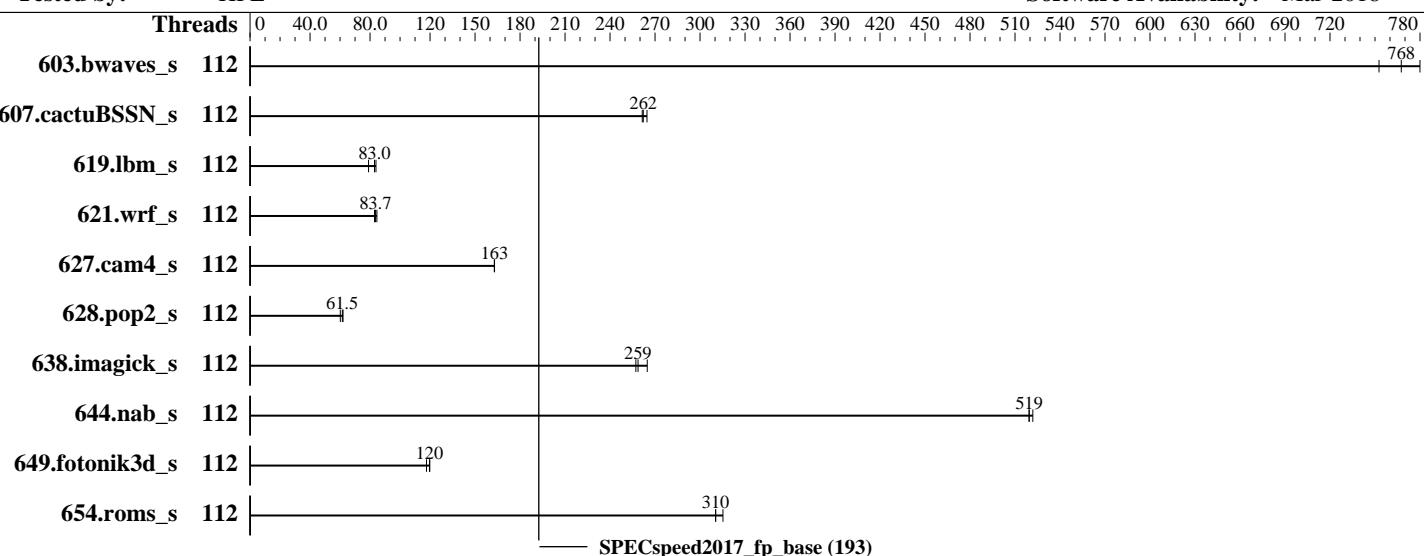

Hardware

CPU Name: Intel Xeon Platinum 8180
 Max MHz.: 3800
 Nominal: 2500
 Enabled: 112 cores, 4 chips
 Orderable: 1, 2, 4 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 600 GB SAS HDD, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (x86_64) (Maipo)
 Compiler: Kernel 3.10.0-693.20.1.el7.x86_64 C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: HPE BIOS Version U34 06/20/2018 released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECspeed2017_fp_base = 193

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Date: Aug-2018

Test Sponsor: HPE

Hardware Availability: Jun-2018

Tested by: HPE

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	112	76.9	768	75.6	780	78.4	753							
607.cactuBSSN_s	112	63.0	265	63.6	262	63.8	261							
619.lbm_s	112	66.3	79.0	62.4	83.9	63.1	83.0							
621.wrf_s	112	156	84.6	158	83.7	159	83.0							
627.cam4_s	112	54.4	163	54.4	163	54.4	163							
628.pop2_s	112	193	61.5	197	60.2	192	62.0							
638.imagick_s	112	56.1	257	54.5	265	55.8	259							
644.nab_s	112	33.5	522	33.6	519	33.6	519							
649.fotonik3d_s	112	76.2	120	76.1	120	77.5	118							
654.roms_s	112	49.9	315	50.7	310	50.7	310							
SPECspeed2017_fp_base = 193														
SPECspeed2017_fp_peak = Not Run														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/cpu2017/lib/ia32:/cpu2017/lib/intel64:/cpu2017/je5.0.1-32:/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (2.50 GHz, Intel Xeon Platinum 8180)	SPECspeed2017_fp_base = 193 SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Aug-2018 Hardware Availability: Jun-2018 Software Availability: Mar-2018

Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Dead Line Allocation set to Disabled
Stale A to S set to Enabled
LLC Dead Line Allocation set to Disabled
Workload Profile set to General Peak Frequency Compute
Minimum Processor Idle Power Core C-state set to C6
Energy/Performance Bias set to Maximum Performance

Workload Profile set to Custom

Uncore Frequency Scaling set to Auto
NUMA Group Size Optimization set to Flat

Sysinfo program /cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Thu Aug 16 15:15:09 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
        4 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 28
    siblings   : 28
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
    physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
    physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               112
On-line CPU(s) list: 0-111
Thread(s) per core:  1
Core(s) per socket:  28
Socket(s):            4
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (2.50 GHz, Intel Xeon Platinum 8180)	SPECspeed2017_fp_base = 193
	SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3	Test Date: Aug-2018
Test Sponsor: HPE	Hardware Availability: Jun-2018
Tested by: HPE	Software Availability: Mar-2018

Platform Notes (Continued)

```

NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
Stepping: 4
CPU MHz: 2500.000
BogoMIPS: 5000.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
From /proc/meminfo
MemTotal: 792053220 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (2.50 GHz, Intel Xeon Platinum 8180)	SPECspeed2017_fp_base = 193
	SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3	Test Date: Aug-2018
Test Sponsor: HPE	Hardware Availability: Jun-2018
Tested by: HPE	Software Availability: Mar-2018

Platform Notes (Continued)

```
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-693.20.1.el7.x86_64 #1 SMP Wed Feb 7 16:53:38 EST
2018 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

run-level 3 Aug 16 12:46

SPEC is set to: /cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs    50G   11G   40G  22%  /


Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 06/20/2018
Memory:
48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
FC 607.cactuBSSN_s(base)
-----
icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL560 Gen10 (2.50 GHz, Intel Xeon Platinum 8180)	SPECspeed2017_fp_base = 193 SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Aug-2018 Hardware Availability: Jun-2018 Software Availability: Mar-2018

Compiler Version Notes (Continued)

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

=====

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

=====

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

fort -m64

Benchmarks using both Fortran and C:

fort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECspeed2017_fp_base = 193

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2018

Hardware Availability: Jun-2018

Software Availability: Mar-2018

Base Portability Flags (Continued)

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
-assume byterecl  
638.imagick_s: -DSPEC_LP64  
644.nab_s: -DSPEC_LP64  
649.fotonik3d_s: -DSPEC_LP64  
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revI.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revI.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-08-16 16:15:08-0400.

Report generated on 2018-10-31 18:14:02 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.