



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488


Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

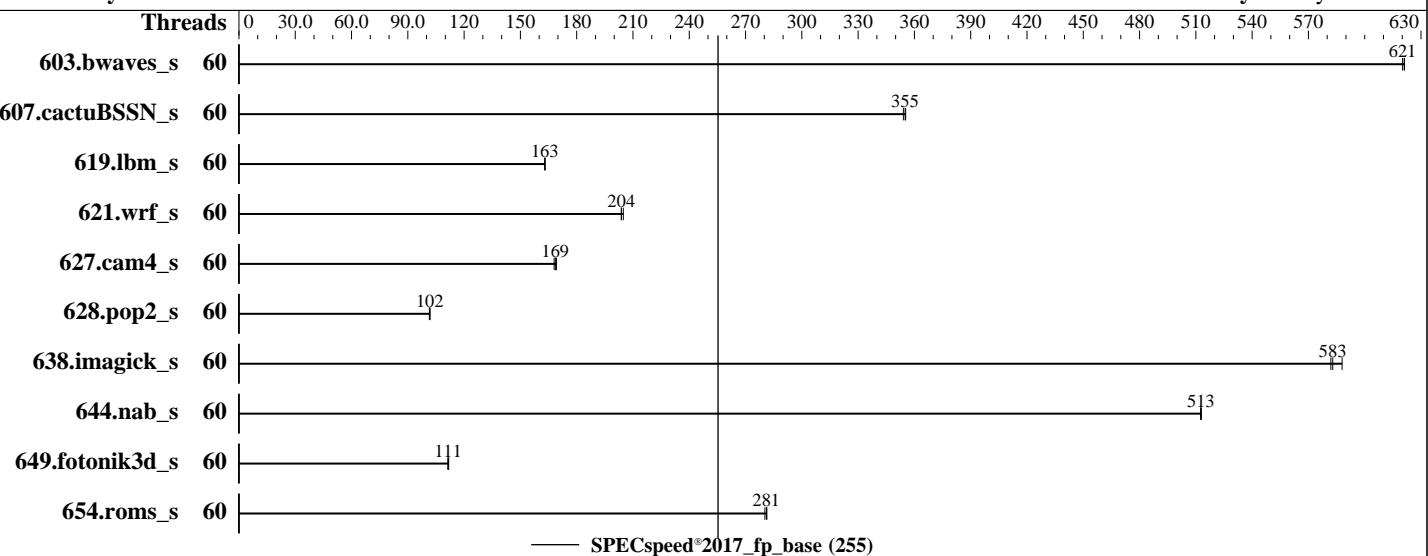

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 60 cores, 1 chip
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 1920 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 2.00.35 Released Nov-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	60	95.1	620	95.0	621	95.0	621									
607.cactuBSSN_s	60	47.0	355	46.9	355	47.1	354									
619.lbm_s	60	32.1	163	32.1	163	32.1	163									
621.wrf_s	60	64.6	205	64.9	204	64.9	204									
627.cam4_s	60	52.8	168	52.6	169	52.4	169									
628.pop2_s	60	117	101	117	102	117	102									
638.imagick_s	60	24.5	588	24.8	582	24.7	583									
644.nab_s	60	34.1	513	34.1	513	34.1	513									
649.fotonik3d_s	60	81.8	111	81.8	111	81.5	112									
654.roms_s	60	56.2	280	56.0	281	56.0	281									

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/spec2017/lib/intel64:/spec2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Performance Profile Set to Load Balance
Enable LP [Global] Set to Single LP

Sysinfo program /spec2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost.localdomain Tue Dec 6 00:11:55 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8490H
  1 "physical id"s (chips)
  60 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 60
  siblings : 60
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59
```

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	60
On-line CPU(s) list:	0-59
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:	Intel(R) Xeon(R) Platinum 8490H
CPU family:	6
Model:	143
Thread(s) per core:	1
Core(s) per socket:	60
Socket(s):	1
Stepping:	6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

Platform Notes (Continued)

Frequency boost:	enabled
CPU max MHz:	1901.0000
CPU min MHz:	800.0000
BogoMIPS:	3800.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_ll1d arch_capabilities
Virtualization:	VT-x
L1d cache:	2.8 MiB (60 instances)
L1i cache:	1.9 MiB (60 instances)
L2 cache:	120 MiB (60 instances)
L3 cache:	112.5 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-59
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.8M	12	Data	1	64	1	64
L1i	32K	1.9M	8	Instruction	1	64	1	64
L2	2M	120M	16	Unified	2	2048	1	64
L3	112.5M	112.5M	15	Unified	3	122880	1	64

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

Platform Notes (Continued)

cache size : 115200 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59

node 0 size: 256858 MB

node 0 free: 251025 MB

node distances:

node 0

0: 10

From /proc/meminfo

MemTotal: 263022620 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="9.0 (Plow)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="9.0"

PLATFORM_ID="platform:el9"

PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)

system-release: Red Hat Enterprise Linux release 9.0 (Plow)

system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos

uname -a:

Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14
12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: May-2022

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Bypass disabled via prctl
Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Dec 5 23:02

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	420G	50G	371G	12%	/

From /sys/devices/virtual/dmi/id

Vendor:	XFUSION
Product:	2288H V7
Product Family:	Eagle Stream
Serial:	2106182101X3N8000005

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

BIOS:

BIOS Vendor:	XFUSION
BIOS Version:	2.00.35
BIOS Date:	11/30/2022
BIOS Revision:	0.35

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C           | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Date: Dec-2022

Test Sponsor: xFusion

Hardware Availability: Jan-2023

Tested by: xFusion

Software Availability: May-2022

Compiler Version Notes (Continued)

=====

C++, C, Fortran | 607.cactusBSSN_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: May-2022

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_S: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_S: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.html>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 255

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Dec-2022

Hardware Availability: Jan-2023

Software Availability: May-2022

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-06 00:11:54-0500.

Report generated on 2023-01-10 19:01:42 by CPU2017 PDF formatter v6442.

Originally published on 2023-01-10.