



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECSpeed®2017_fp_base = 249

SPECSpeed®2017_fp_peak = 253

CPU2017 License: 3


Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

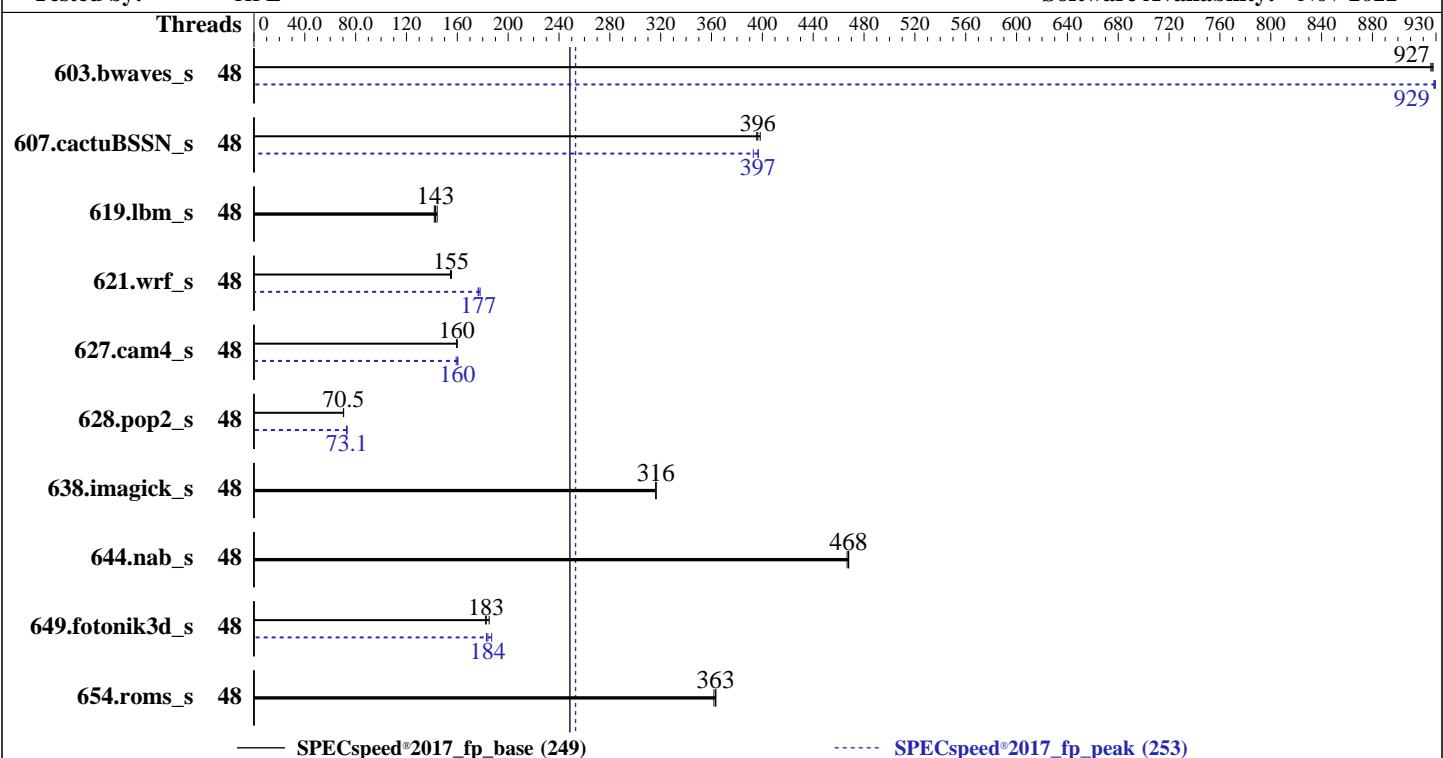

— SPECSpeed®2017_fp_base (249)

----- SPECSpeed®2017_fp_peak (253)

Hardware

CPU Name: AMD EPYC 9224
 Max MHz: 3700
 Nominal: 2500
 Enabled: 48 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip,
 16 MB shared / 6 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 Compiler: Kernel 5.15.0-56-generic
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
 Firmware: Yes
 File System: HPE BIOS Version v1.12 11/24/2022 released
 System State: Nov-2022
 Base Pointers: ext4
 Peak Pointers: Run level 5 (multi-user)
 Other: 64-bit
 Power Management: Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	63.7	926	63.6	928	63.7	927	48	63.6	928	63.5	930	63.5	929
607.cactuBSSN_s	48	41.9	398	42.1	396	42.1	396	48	42.0	397	42.4	393	42.0	397
619.lbm_s	48	36.9	142	36.3	144	36.7	143	48	36.9	142	36.3	144	36.7	143
621.wrf_s	48	85.1	155	85.2	155	85.5	155	48	75.0	176	74.8	177	74.3	178
627.cam4_s	48	55.5	160	55.6	159	55.4	160	48	55.2	160	55.4	160	55.7	159
628.pop2_s	48	169	70.4	168	70.5	168	70.5	48	162	73.1	162	73.1	163	72.9
638.imagick_s	48	45.6	316	45.6	316	45.6	316	48	45.6	316	45.6	316	45.6	316
644.nab_s	48	37.3	468	37.4	467	37.3	468	48	37.3	468	37.4	467	37.3	468
649.fotonik3d_s	48	49.3	185	50.0	182	49.9	183	48	49.5	184	48.7	187	49.8	183
654.roms_s	48	43.5	362	43.3	363	43.3	363	48	43.5	362	43.3	363	43.3	363

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves_s, 607.cactubSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

To disable THP for peak runs of 621.wrf_s:

'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

To enable THP only on request for peak runs of 654.roms_s:

'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-47"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 607.cactubSSN_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-47"
PGHPF_ZMEM = "yes"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL365 Gen11 (2.50 GHz, AMD EPYC 9224)	SPECspeed®2017_fp_base = 249 SPECspeed®2017_fp_peak = 253
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Dec-2022 Hardware Availability: Dec-2022 Software Availability: Nov-2022

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Memory PStates set to Disabled

Thermal Configuration set to Maximum Cooling

The system ROM used for this result contains microcode version 0xa10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L6

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on admin1 Tue Jun 28 15:49:49 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9224 24-Core Processor
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings   : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu from util-linux 2.37.2:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	48
On-line CPU(s) list:	0-47
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9224 24-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	24
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3707.0000
CPU min MHz:	400.0000
BogoMIPS:	4992.64
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cq_m rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cq_m_llc cq_m_occup_llc cq_m_mb_m_total cq_m_mb_m_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pkupkospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_ll1d
Virtualization:	AMD-V
L1d cache:	1.5 MiB (48 instances)
L1i cache:	1.5 MiB (48 instances)
L2 cache:	48 MiB (48 instances)
L3 cache:	128 MiB (8 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-5
NUMA node1 CPU(s):	12-17
NUMA node2 CPU(s):	18-23
NUMA node3 CPU(s):	6-11
NUMA node4 CPU(s):	24-29
NUMA node5 CPU(s):	36-41
NUMA node6 CPU(s):	42-47
NUMA node7 CPU(s):	30-35

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

/proc/cpuinfo cache data
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 193188 MB
node 0 free: 192806 MB
node 1 cpus: 12 13 14 15 16 17
node 1 size: 193534 MB
node 1 free: 193190 MB
node 2 cpus: 18 19 20 21 22 23
node 2 size: 193534 MB
node 2 free: 193227 MB
node 3 cpus: 6 7 8 9 10 11
node 3 size: 193534 MB
node 3 free: 193233 MB
node 4 cpus: 24 25 26 27 28 29
node 4 size: 193534 MB
node 4 free: 193129 MB
node 5 cpus: 36 37 38 39 40 41
node 5 size: 193534 MB
node 5 free: 192995 MB
node 6 cpus: 42 43 44 45 46 47
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 6 size: 193491 MB
node 6 free: 193107 MB
node 7 cpus: 30 31 32 33 34 35
node 7 size: 193534 MB
node 7 free: 193008 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 11 11 32 32 32 32
  1: 11 10 11 11 32 32 32 32
  2: 11 11 10 11 32 32 32 32
  3: 11 11 11 10 32 32 32 32
  4: 32 32 32 32 10 11 11 11
  5: 32 32 32 32 11 10 11 11
  6: 32 32 32 32 11 11 10 11
  7: 32 32 32 32 11 11 11 10
```

```
From /proc/meminfo
MemTotal:      1585034840 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/sbin/tuned-adm active
  Current active profile: throughput-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
  performance
```

```
/usr/bin/lsb_release -d
Ubuntu 22.04.1 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bookworm/sid
os-release:
  PRETTY_NAME="Ubuntu 22.04.1 LTS"
  NAME="Ubuntu"
  VERSION_ID="22.04"
  VERSION="22.04.1 LTS (Jammy Jellyfish)"
  VERSION_CODENAME=jammy
  ID=ubuntu
  ID_LIKE=debian
  HOME_URL="https://www.ubuntu.com/"
```

```
uname -a:
Linux admin1 5.15.0-56-generic #62-Ubuntu SMP Tue Nov 22 19:54:14 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.50 GHz, AMD EPYC 9224)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling, PBRSB-eIBRS: Not affected
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Jun 28 00:00

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	98G	18G	76G	19%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL365 Gen11
Product Family:	ProLiant
Serial:	DL365G11-003

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800

BIOS:

BIOS Vendor:	HPE
BIOS Version:	1.12
BIOS Date:	11/24/2022
BIOS Revision:	1.12
Firmware Revision:	1.10

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
           | 644.nab_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
           | 654.roms_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
Fortran, C    | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
           | 628.pop2_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes (Continued)

LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on

LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

628.pop2_s (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-Mrecursive -fvector-transform -fscalar-transform  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100  
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 249

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-28 06:19:49-0400.

Report generated on 2023-02-01 18:20:47 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.