



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Nettrix**

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

**SPECSpeed®2017\_fp\_base = 277**

**SPECSpeed®2017\_fp\_peak = 277**

CPU2017 License: 6138


Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

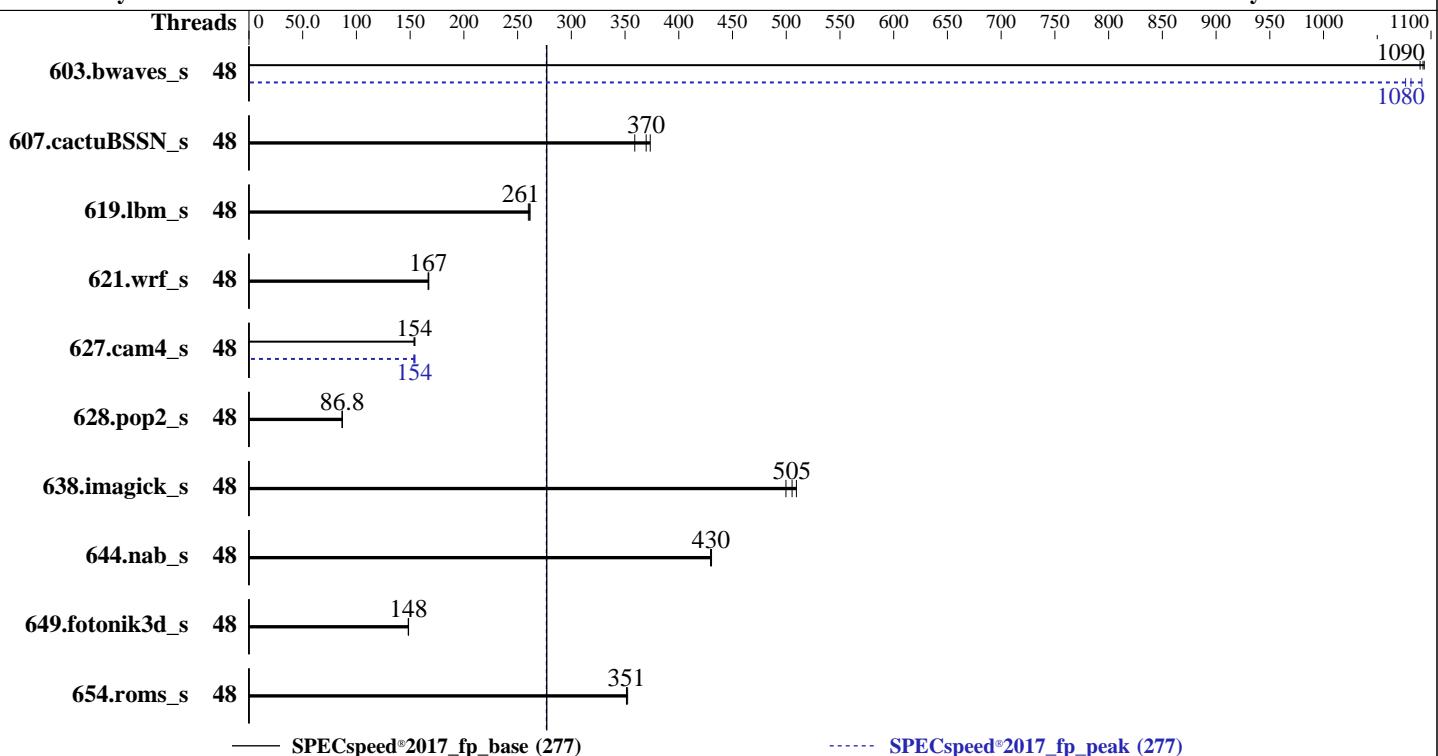

— SPECSpeed®2017\_fp\_base (277)

----- SPECSpeed®2017\_fp\_peak (277)

## Hardware

CPU Name: Intel Xeon Gold 6418H  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 48 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB NVME SSD  
 Other: None

## OS:

SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default

## Compiler:

C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
 Compiler Build for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler  
 Build for Linux;

## Parallel:

Yes

## Firmware:

Nettrix BIOS Version NNH1041018-U00-1 released  
 Nov-2022

## File System:

btrfs

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

64-bit

## Other:

jemalloc memory allocator V5.0.1

## Power Management:

BIOS and OS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Nettrix**

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

**SPECSpeed®2017\_fp\_base = 277**

**SPECSpeed®2017\_fp\_peak = 277**

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	54.1	1090	53.9	1090	<b>54.0</b>	<b>1090</b>	48	54.1	1090	54.8	1080	<b>54.6</b>	<b>1080</b>
607.cactuBSSN_s	48	46.4	359	<b>45.1</b>	<b>370</b>	44.6	373	48	46.4	359	<b>45.1</b>	<b>370</b>	44.6	373
619.lbm_s	48	20.1	260	<b>20.1</b>	<b>261</b>	20.0	262	48	20.1	260	<b>20.1</b>	<b>261</b>	20.0	262
621.wrf_s	48	79.0	167	<b>79.2</b>	<b>167</b>	79.3	167	48	79.0	167	<b>79.2</b>	<b>167</b>	79.3	167
627.cam4_s	48	57.4	154	57.7	154	<b>57.5</b>	<b>154</b>	48	<b>57.5</b>	<b>154</b>	57.8	153	57.4	154
628.pop2_s	48	<b>137</b>	<b>86.8</b>	137	86.7	137	87.0	48	<b>137</b>	<b>86.8</b>	137	86.7	137	87.0
638.imagick_s	48	28.3	509	28.9	500	<b>28.5</b>	<b>505</b>	48	28.3	509	28.9	500	<b>28.5</b>	<b>505</b>
644.nab_s	48	<b>40.6</b>	<b>430</b>	40.7	430	40.6	430	48	<b>40.6</b>	<b>430</b>	40.7	430	40.6	430
649.fotonik3d_s	48	<b>61.4</b>	<b>148</b>	61.5	148	61.4	149	48	<b>61.4</b>	<b>148</b>	61.5	148	61.4	149
654.roms_s	48	44.8	351	44.7	352	<b>44.8</b>	<b>351</b>	48	44.8	351	44.7	352	<b>44.8</b>	<b>351</b>

SPECSpeed®2017\_fp\_base = 277

SPECSpeed®2017\_fp\_peak = 277

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/lijq/lib/intel64:/home/lijq/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECSpeed®2017\_fp\_base = 277

SPECSpeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Platform Notes

### BIOS Configuration:

Enable LP [Global] set to Single LP  
LLC Prefetch set to Enabled  
SNC (Sub NUMA) set to Disabled  
Patrol Scrub set to Disabled  
LLC dead line alloc set to Disabled  
XPT Prefetch set to Enabled  
KTI Prefetch set to Disabled  
DCU Streamer Prefetcher set to Disabled  
Hardware P-States set to Native Mode

Sysinfo program /home/lijq/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Jan 16 14:51:02 2023

SUT (System Under Test) info as seen by some common utilities.

---

### Table of contents

---

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

1. uname -a
- 

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 277

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Platform Notes (Continued)

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

-----  
2. w

```
14:51:02 up 5 min, 2 users, load average: 0.00, 0.02, 0.00
USER      TTY      FROM             LOGIN@     IDLE     JCPU    PCPU WHAT
root      tty1          -           14:50   38.00s  0.99s  0.00s -bash
root      pts/0        10.2.48.216  14:48     1:14   0.07s  0.07s -bash
```

-----  
3. Username

```
From environment variable $USER: root
```

-----  
4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4125291
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125291
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
-bash
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags -c
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=48 --tune base,peak -o all --define drop_caches
fpspeed
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=48 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.013/templogs/preenv.fpspeed.013.0.log --lognum 013.0
--from_runcpu 2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/lijq
```

```
-----  
6. /proc/cpuinfo  
    model name      : Intel(R) Xeon(R) Gold 6418H  
    vendor_id       : GenuineIntel  
    cpu family     : 6  
    model          : 143  
    stepping       : 8  
    microcode      : 0x2b000111  
    bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs  
    cpu cores      : 24  
    siblings        : 24  
    2 physical ids (chips)  
    48 processors (hardware threads)  
    physical id 0: core ids 0-23  
    physical id 1: core ids 0-23  
    physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46  
    physical id 1: apicids  
    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:  
Architecture:                  x86_64  
CPU op-mode(s):                32-bit, 64-bit  
Address sizes:                 52 bits physical, 57 bits virtual  
Byte Order:                    Little Endian  
CPU(s):                        48  
On-line CPU(s) list:          0-47  
Vendor ID:                     GenuineIntel  
Model name:                    Intel(R) Xeon(R) Gold 6418H  
CPU family:                   6  
Model:                         143  
Thread(s) per core:            1  
Core(s) per socket:            24  
Socket(s):                     2  
Stepping:                      8  
CPU max MHz:                  4000.0000  
CPU min MHz:                  800.0000  
BogoMIPS:                      4200.00  
Flags:                          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Nettrix**

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

**SPECspeed®2017\_fp\_base = 277**

**SPECspeed®2017\_fp\_peak = 277**

**CPU2017 License:** 6138

**Test Date:** Jan-2023

**Test Sponsor:** Nettrix

**Hardware Availability:** Jan-2023

**Tested by:** Nettrix

**Software Availability:** Jun-2022

## Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
vmx smx est tm2 ssse3 sdbg fma cx16 xptr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2
erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
amx_tile flush_llc arch_capabilities
```

Virtualization:

L1d cache: 2.3 MiB (48 instances)

L1i cache: 1.5 MiB (48 instances)

L2 cache: 96 MiB (48 instances)

L3 cache: 120 MiB (2 instances)

NUMA node(s): 2

NUMA node0 CPU(s): 0-23

NUMA node1 CPU(s): 24-47

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation: Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-23

node 0 size: 515609 MB

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

SPECSpeed®2017\_fp\_base = 277

SPECSpeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Platform Notes (Continued)

```
node 0 free: 514444 MB
node 1 cpus: 24-47
node 1 size: 515735 MB
node 1 free: 515102 MB
node distances:
node    0    1
  0: 10 21
  1: 21 10
```

```
-----9. /proc/meminfo
      MemTotal:       1056097160 kB
```

```
-----10. who -r
      run-level 3 Jan 16 14:45
```

```
-----11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
      Default Target  Status
      multi-user     running
```

```
-----12. Services, from systemctl list-unit-files
      STATE          UNIT FILES
      enabled        apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings kdump
                      kdump-early nvmefc-boot-connections postfix purge-kernels rollback sshd wicked
                      wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
      enabled-runtime   systemd-remount-fs
      disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                      exchange-bmc-os-info grub2-once haveged-switch-root ipmievd issue-add-ssh-keys kexec-load
                      nfs nfs-blkmap nvmf-autoconnect rpcbind rpmconfigcheck serial-getty@
                      systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                      systemd-time-wait-sync systemd-timesyncd tuned
      indirect       wickedd
```

```
-----13. Linux kernel boot-time arguments, from /proc/cmdline
      BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
      root=UUID=3da31185-cc2a-4a7c-b38c-37a409ad06ed
      splash=silent
      mitigations=auto
      quiet
      security=apparmor
      crashkernel=300M,high
      crashkernel=72M,low
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Platform Notes (Continued)

```
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 4.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.

    boost state support:
        Supported: yes
        Active: yes
```

```
15. tuned-adm active
Current active profile: latency-performance
```

```
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

```
17. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Nettrix

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

**SPECSpeed®2017\_fp\_base = 277**

**SPECSpeed®2017\_fp\_peak = 277**

**CPU2017 License:** 6138

**Test Date:** Jan-2023

**Test Sponsor:** Nettrix

**Hardware Availability:** Jan-2023

**Tested by:** Nettrix

**Software Availability:** Jun-2022

## Platform Notes (Continued)

max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

### 19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

### 20. Disk information

SPEC is set to: /home/ljq

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	btrfs	928G	136G	793G	15%	/home

### 21. /sys/devices/virtual/dmi/id

Vendor:	Nettrix
Product:	R620 G50 LP
Product Family:	Rack
Serial:	6101823603509646

### 22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	American Megatrends International, LLC.
BIOS Version:	NNH1041018-U00-1
BIOS Date:	11/01/2022
BIOS Revision:	5.29

## Compiler Version Notes

=====

C	619.lbm_s(base, peak) 638.imagick_s(base, peak)
---	---

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

SPECSpeed®2017\_fp\_base = 277

SPECSpeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Compiler Version Notes (Continued)

| 644.nab\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

SPECSpeed®2017\_fp\_base = 277

SPECSpeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactubssn\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX512 -Ofast -ffast-math  
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Jan-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: basepeak = yes
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Gold 6418H, 2.10 GHz)

SPECspeed®2017\_fp\_base = 277

SPECspeed®2017\_fp\_peak = 277

CPU2017 License: 6138

Test Date: Jan-2023

Test Sponsor: Nettrix

Hardware Availability: Jan-2023

Tested by: Nettrix

Software Availability: Jun-2022

## Peak Optimization Flags (Continued)

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

```
649.fotonik3d_s: basepeak = yes
```

```
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: basepeak = yes
```

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-16 01:51:01-0500.

Report generated on 2023-02-01 18:32:41 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.