



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3


**Test Date:** Dec-2022

Test Sponsor: HPE

**Hardware Availability:** Dec-2022

Tested by: HPE

**Software Availability:** Nov-2022

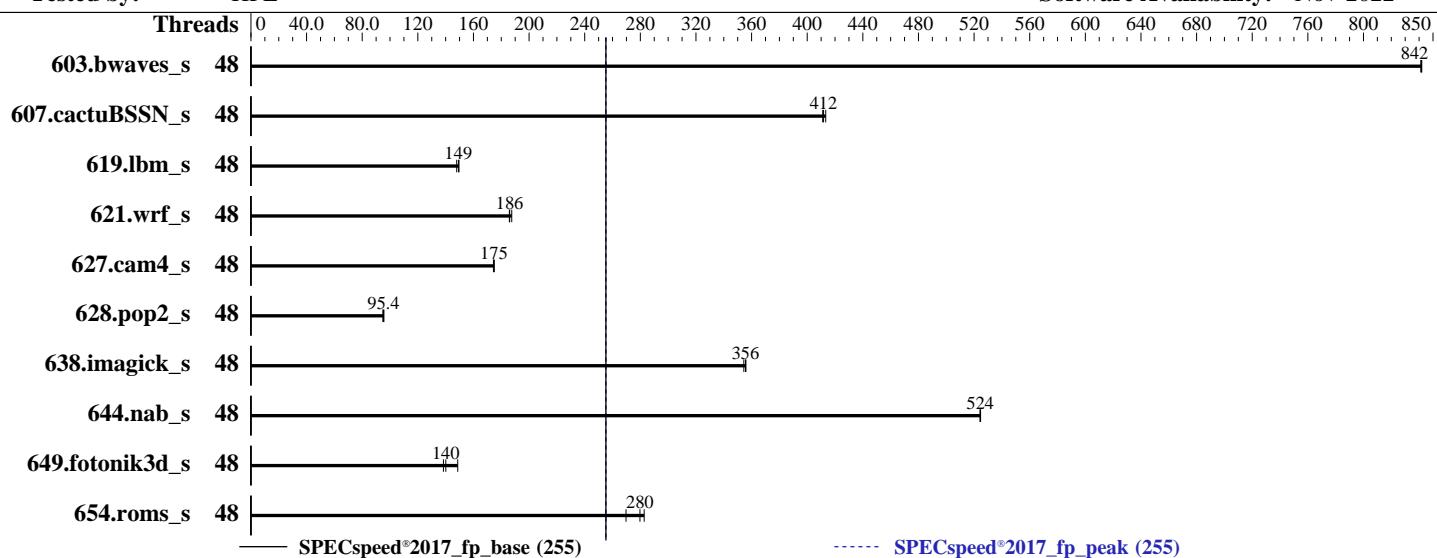

## Hardware

CPU Name: AMD EPYC 9474F  
 Max MHz: 4100  
 Nominal: 3600  
 Enabled: 48 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
     32 MB shared / 6 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 1.6 TB NVMe SSD, RAID 0  
 Other: None

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 Compiler: Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
 C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.12 11/24/2022 released Nov-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	70.1	841	70.1	842	<b>70.1</b>	<b>842</b>	48	70.1	841	70.1	842	<b>70.1</b>	<b>842</b>
607.cactuBSSN_s	48	<b>40.5</b>	<b>412</b>	40.5	411	40.3	413	48	<b>40.5</b>	<b>412</b>	40.5	411	<b>40.3</b>	<b>413</b>
619.lbm_s	48	<b>35.1</b>	<b>149</b>	35.4	148	35.0	150	48	<b>35.1</b>	<b>149</b>	35.4	148	<b>35.0</b>	<b>150</b>
621.wrf_s	48	70.5	188	<b>71.1</b>	<b>186</b>	71.2	186	48	70.5	188	<b>71.1</b>	<b>186</b>	71.2	186
627.cam4_s	48	50.8	174	<b>50.7</b>	<b>175</b>	50.7	175	48	50.8	174	<b>50.7</b>	<b>175</b>	50.7	175
628.pop2_s	48	124	95.5	<b>124</b>	<b>95.4</b>	125	94.8	48	124	95.5	<b>124</b>	<b>95.4</b>	125	94.8
638.imagick_s	48	40.7	354	<b>40.6</b>	<b>356</b>	40.5	356	48	40.7	354	<b>40.6</b>	<b>356</b>	40.5	356
644.nab_s	48	33.3	525	<b>33.3</b>	<b>524</b>	33.3	524	48	33.3	525	<b>33.3</b>	<b>524</b>	33.3	524
649.fotonik3d_s	48	61.3	149	<b>65.1</b>	<b>140</b>	65.9	138	48	61.3	149	<b>65.1</b>	<b>140</b>	65.9	138
654.roms_s	48	<b>56.3</b>	<b>280</b>	55.7	283	58.4	270	48	<b>56.3</b>	<b>280</b>	55.7	283	<b>58.4</b>	270

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Dec-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

To enable THP only on request for peak runs of 628.pop2\_s:

'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.

To disable THP for peak runs of 627.cam4\_s, 649.fotonik3d\_s, and 654.roms\_s,  
'echo never > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-47"  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd\_speed\_aocc400\_genoa\_B\_lib/lib:  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "48"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute  
Determinism Control set to Manual

Performance Determinism set to Power Deterministic  
AMD SMT Option set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Memory PStates set to Disabled

Thermal Configuration set to Maximum Cooling

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Platform Notes (Continued)

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0x0A10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L6

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on localhost.localdomain Sun Jun 4 16:54:14 2023
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 9474F 48-Core Processor
  1 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 48
  siblings : 48
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
            32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61
```

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	48
On-line CPU(s) list:	0-47
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9474F 48-Core Processor
BIOS Model name:	AMD EPYC 9474F 48-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	48
Socket(s):	1
Stepping:	1
BogoMIPS:	7189.04
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr           pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt           pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid           aperfmpf perf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

## Platform Notes (Continued)

```

popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bml1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lld

Virtualization: AMD-V
L1d cache: 1.5 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5
NUMA node1 CPU(s): 24-29
NUMA node2 CPU(s): 12-17
NUMA node3 CPU(s): 36-41
NUMA node4 CPU(s): 18-23
NUMA node5 CPU(s): 42-47
NUMA node6 CPU(s): 6-11
NUMA node7 CPU(s): 30-35
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

```
/proc/cpuinfo cache data
cache size : 1024 KB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

**Test Date:** Dec-2022

Test Sponsor: HPE

**Hardware Availability:** Dec-2022

Tested by: HPE

**Software Availability:** Nov-2022

## Platform Notes (Continued)

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 48136 MB
node 0 free: 47927 MB
node 1 cpus: 24 25 26 27 28 29
node 1 size: 48382 MB
node 1 free: 47849 MB
node 2 cpus: 12 13 14 15 16 17
node 2 size: 48382 MB
node 2 free: 48184 MB
node 3 cpus: 36 37 38 39 40 41
node 3 size: 48346 MB
node 3 free: 48176 MB
node 4 cpus: 18 19 20 21 22 23
node 4 size: 48382 MB
node 4 free: 48265 MB
node 5 cpus: 42 43 44 45 46 47
node 5 size: 48382 MB
node 5 free: 48259 MB
node 6 cpus: 6 7 8 9 10 11
node 6 size: 48382 MB
node 6 free: 48264 MB
node 7 cpus: 30 31 32 33 34 35
node 7 size: 48334 MB
node 7 free: 48225 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 12 12 12 12 12 12
  1: 11 10 12 12 12 12 12 12
  2: 12 12 10 11 12 12 12 12
  3: 12 12 11 10 12 12 12 12
  4: 12 12 12 12 10 11 12 12
  5: 12 12 12 12 11 10 12 12
  6: 12 12 12 12 12 12 10 11
  7: 12 12 12 12 12 12 11 10
```

From /proc/meminfo

```
MemTotal:      396010920 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Dec-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Platform Notes (Continued)

```
VERSION="9.0 (Plow)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="9.0"
PLATFORM_ID="platform:el9"
PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos

uname -a:
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14
12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jun 4 16:48

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	12G	807G	2%	/home

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL345 Gen11
Product Family:	ProLiant
Serial:	DL345G11-004

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Dec-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800

BIOS:

BIOS Vendor: HPE  
BIOS Version: 1.12  
BIOS Date: 11/24/2022  
BIOS Revision: 1.12  
Firmware Revision: 1.10

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Dec-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

=====

Fortran	603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
	654.roms_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

Fortran, C	621.wrf_s(base, peak) 627.cam4_s(base, peak)
	628.pop2_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Dec-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactubSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Benchmarks using Fortran, C, and C++:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Dec-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-flang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 255**

**SPECspeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Dec-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.60 GHz, AMD EPYC 9474F)

**SPECSpeed®2017\_fp\_base = 255**

**SPECSpeed®2017\_fp\_peak = 255**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Dec-2022

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2023-06-04 07:24:14-0400.

Report generated on 2023-02-15 10:33:26 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.