



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

SPECSpeed®2017_fp_peak = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

CPU2017 License: 6573


Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

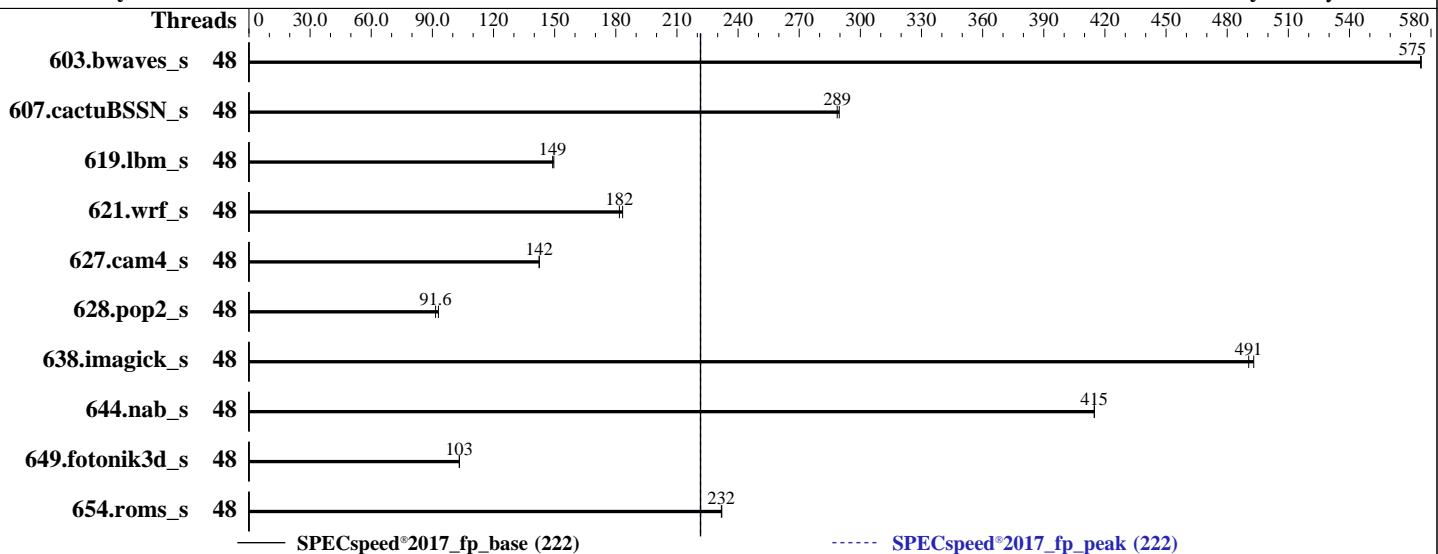

Hardware

CPU Name: Intel Xeon Platinum 8461V
Max MHz: 3700
Nominal: 2200
Enabled: 48 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 97.5 MB I+D on chip per chip
Other: None
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 125 GB on tmpfs
Other: None

Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa)
4.18.0-372.9.1.el8.x86_64
Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 0.3.1 released Nov-2022
File System: tmpfs
System State: Run level 5 (graphical multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECSpeed®2017_fp_peak = 222

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	103	575	103	575			48	103	575	103	575				
607.cactuBSSN_s	48	57.6	290	57.8	289			48	57.6	290	57.8	289				
619.lbm_s	48	35.0	150	35.2	149			48	35.0	150	35.2	149				
621.wrf_s	48	72.8	182	72.1	183			48	72.8	182	72.1	183				
627.cam4_s	48	62.3	142	62.2	142			48	62.3	142	62.2	142				
628.pop2_s	48	128	93.0	130	91.6			48	128	93.0	130	91.6				
638.imagick_s	48	29.3	493	29.4	491			48	29.3	493	29.4	491				
644.nab_s	48	42.1	415	42.1	415			48	42.1	415	42.1	415				
649.fotonik3d_s	48	88.4	103	88.2	103			48	88.4	103	88.2	103				
654.roms_s	48	67.9	232	67.9	232			48	67.9	232	67.9	232				
SPECSpeed®2017_fp_base = 222								SPECSpeed®2017_fp_peak = 222								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
    1.9-ic2022.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
```

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECSpeed®2017_fp_peak = 222

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
    Logical Processor : Disabled
    Sub NUMA Cluster : 2-way Clustering
    Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
    C1E : Disabled
    C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
    Power Management : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 1 Wed Jan 25 23:41:48 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECSpeed®2017_fp_peak = 222

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

10. who -r
11. Systemd service manager version: systemd 239 (239-58.el8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux 1 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

2. w
23:41:48 up 2:26, 1 user, load average: 5.57, 5.72, 3.44
USER TTY FROM LOGIN@ IDLE PCPU WHAT
donald :1 :1 21:18 ?xdm? 25.98s 0.00s /usr/libexec/gdm-x-session
--register-session --run-script gnome-session

3. Username
From environment variable \$USER: root
From the command 'logname': donald

4. ulimit -a
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060709
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8461V)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECSpeed®2017_fp_base = 222

SPECSpeed®2017_fp_peak = 222

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Platform Notes (Continued)

```
cpu time          (seconds, -t) unlimited
max user processes      (-u) 2060709
virtual memory        (kbytes, -v) unlimited
file locks           (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 18  
/usr/lib/systemd/systemd --user  
/usr/libexec/gnome-terminal-server  
bash  
sudo su  
su  
bash  
/bin/bash ./DELL_speed.sh  
/bin/bash ./dell-norun-main.sh speed  
/bin/bash ./dell-norun-main.sh speed  
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define  
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc  
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define  
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=48 --tune base,peak -o all --define drop_caches  
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc fpspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=48 --tune base,peak --output_format all  
--define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define  
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode speed --tune base:peak --size refspeed fpspeed  
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0  
--from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
```

```
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) Platinum 8461V  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 143  
stepping        : 8  
microcode       : 0x2b000111  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores      : 48  
siblings        : 48  
1 physical ids (chips)  
48 processors (hardware threads)  
physical id 0: core ids 0-47
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECSpeed®2017_fp_peak = 222

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.32.1:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 1
Core(s) per socket: 48
Socket(s): 1
NUMA node(s): 2
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel
CPU family: 6
Model: 143
Model name: Intel(R) Xeon(R) Platinum 8461V
BIOS Model name: Intel(R) Xeon(R) Platinum 8461V
Stepping: 8
CPU MHz: 2200.000
BogoMIPS: 4400.00
L1d cache: 48K
L1i cache: 32K
L2 cache: 2048K
L3 cache: 99840K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsqsb base tsc_adjust bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occur_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECspeed®2017_fp_base = 222

SPECspeed®2017_fp_peak = 222

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

```
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46

node 0 size: 257197 MB

node 0 free: 251291 MB

node 1 cpus: 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47

node 1 size: 258039 MB

node 1 free: 247883 MB

node distances:

node 0 1

0: 10 12

1: 12 10

9. /proc/meminfo

MemTotal: 527602436 kB

10. who -r

run-level 5 Jan 25 21:16

11. Systemd service manager version: systemd 239 (239-58.el8)

Default Target Status

graphical running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
atd audited autovt@ avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm getty@
import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned libstoragemgmt
libvirtd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvmefc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd syslog timedatectl tuned udisks2 vdo vauthd vmtoolsd
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
debug-shell dnsmasq ebttables gssproxy hwloc-dump-hwdata initial-setup
initial-setup-reconfiguration iprdump iprinit iprupdate iscsid iscsiuio kpatch kvm_stat ledmon
libvirt-guests man-db-restart-cache-update ndctl-monitor netcf-transaction nfs-blkmap nfs-convert
nfs-server nftables numad nvmf-autoconnect oddjobd podman podman-auto-update podman-restart
psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ speech-dispatcherd
sshd-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcscd upower virtinterfaced

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8461V)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECSpeed®2017_fp_base = 222

SPECSpeed®2017_fp_peak = 222

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Platform Notes (Continued)

```
virtnetworkd virtnodevdevd virtnwfiltterd virtproxyd virtqemud virtsecretd virtstoraged  
wpa_supplicant  
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd  
virtlogd  
masked systemd-timedated
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-372.9.1.el8.x86_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=auto  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet
```

14. cpupower frequency-info
analyzing CPU 0:

```
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes
```

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	0
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECSpeed®2017_fp_peak = 222

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

```
vm.swappiness          10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
    defrag      always defer defer+madvise [madvise] never  
    enabled     [always] madvise never  
    hpage_pmd_size 2097152  
    shmem_enabled always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs 60000  
    defrag                1  
    max_ptes_none         511  
    max_ptes_swap         64  
    pages_to_scan         4096  
    scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
    From /etc/*-release /etc/*-version  
    os-release      Red Hat Enterprise Linux 8.6 (Ootpa)  
    redhat-release  Red Hat Enterprise Linux release 8.6 (Ootpa)  
    system-release  Red Hat Enterprise Linux release 8.6 (Ootpa)
```

```
-----  
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities  
    itlb_multihit      Not affected  
    l1tf               Not affected  
    mds                Not affected  
    meltdown          Not affected  
    spec_store_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
    spectre_v1         Mitigation: usercopy/swapgs barriers and __user pointer sanitization  
    spectre_v2         Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling  
    srbds              Not affected  
    tsx_async_abort   Not affected
```

For more information, see the Linux documentation on hardware vulnerabilities, for example
<https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

```
-----  
21. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1  
Filesystem  Type  Size  Used  Avail Use% Mounted on  
tmpfs       tmpfs  125G  9.6G  116G  8% /mnt/ramdisk
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECSpeed®2017_fp_peak = 222

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Platform Notes (Continued)

22. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge C6620
Product Family: PowerEdge
Serial: SL6C201

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 0.3.1
BIOS Date: 11/24/2022
BIOS Revision: 0.3

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECSpeed®2017_fp_peak = 222

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran	603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
	654.roms_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C	621.wrf_s(base, peak) 627.cam4_s(base, peak)
	628.pop2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8461V)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECSpeed®2017_fp_base = 222

SPECSpeed®2017_fp_peak = 222

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Base Portability Flags (Continued)

```
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-fno-math-errno -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-math-errno
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8461V)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECSpeed®2017_fp_base = 222

SPECSpeed®2017_fp_peak = 222

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 222

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECSpeed®2017_fp_peak = 222

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Peak Optimization Flags (Continued)

607.cactubSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-25 23:41:48-0500.

Report generated on 2023-02-15 10:36:30 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.