



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138


Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Mar-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

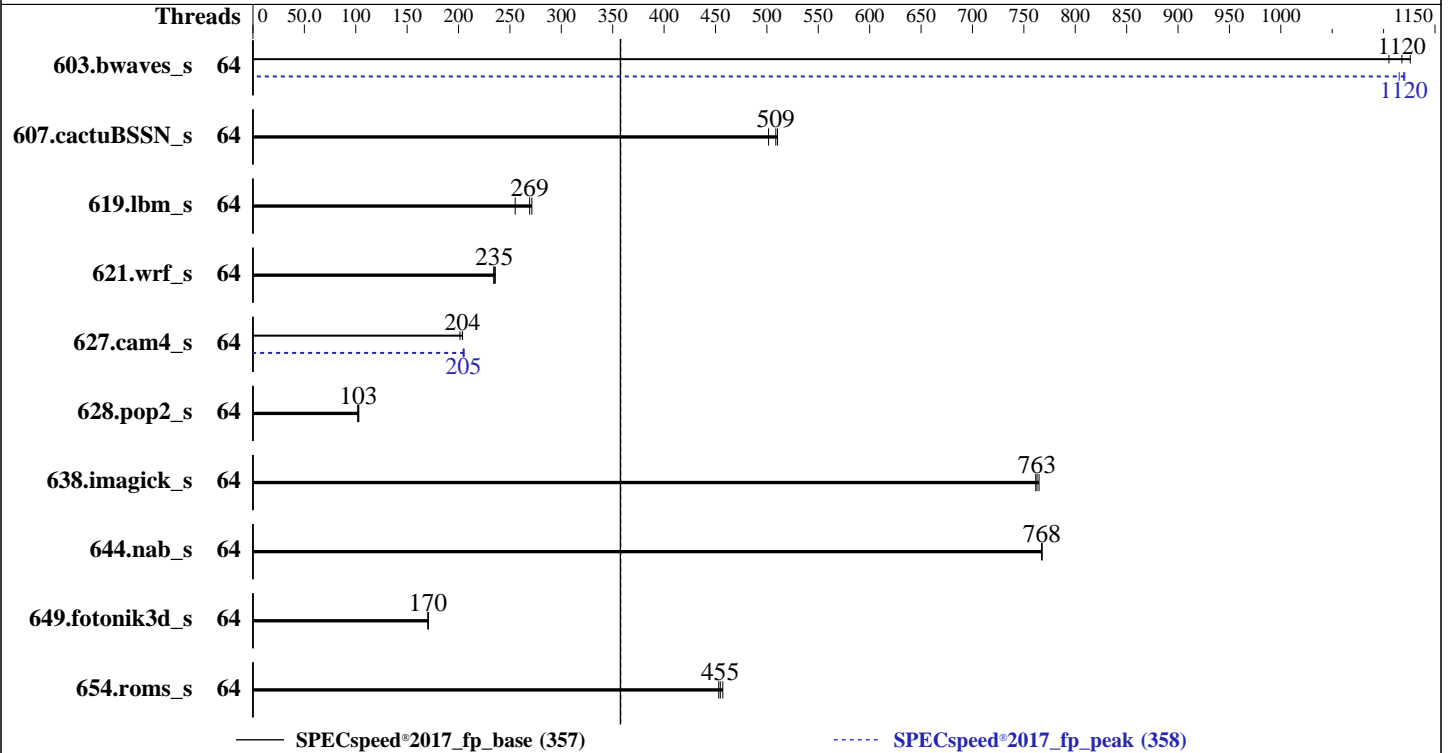

Hardware

CPU Name: Intel Xeon Gold 6458Q
 Max MHz: 4000
 Nominal: 3100
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 Classic for Linux;
 C/C++: Version 2023.0 of Intel C/C++ Compiler
 Classic for Linux
 Parallel: Yes
 Firmware: Nettrix BIOS Version NNH1041018-U00-1 released
 Nov-2022
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECSpeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECSpeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	53.4	1110	52.4	1130	<u>52.8</u>	<u>1120</u>	64	52.9	1120	52.6	1120	<u>52.7</u>	<u>1120</u>
607.cactuBSSN_s	64	33.2	502	<u>32.8</u>	<u>509</u>	32.7	510	64	33.2	502	<u>32.8</u>	<u>509</u>	32.7	510
619.lbm_s	64	19.3	271	20.5	255	<u>19.5</u>	<u>269</u>	64	19.3	271	20.5	255	<u>19.5</u>	<u>269</u>
621.wrf_s	64	56.5	234	56.1	236	<u>56.3</u>	<u>235</u>	64	56.5	234	56.1	236	<u>56.3</u>	<u>235</u>
627.cam4_s	64	<u>43.5</u>	<u>204</u>	43.5	204	44.0	201	64	43.3	205	<u>43.3</u>	<u>205</u>	43.1	205
628.pop2_s	64	115	103	<u>116</u>	<u>103</u>	117	102	64	115	103	<u>116</u>	<u>103</u>	117	102
638.imagick_s	64	<u>18.9</u>	<u>763</u>	18.9	762	18.9	765	64	<u>18.9</u>	<u>763</u>	18.9	762	18.9	765
644.nab_s	64	22.8	768	<u>22.8</u>	<u>768</u>	22.8	767	64	22.8	768	<u>22.8</u>	<u>768</u>	22.8	767
649.fotonik3d_s	64	53.5	170	53.4	171	<u>53.5</u>	<u>170</u>	64	53.5	170	53.4	171	<u>53.5</u>	<u>170</u>
654.roms_s	64	34.7	453	34.4	457	<u>34.6</u>	<u>455</u>	64	34.7	453	34.4	457	<u>34.6</u>	<u>455</u>

SPECSpeed®2017_fp_base = 357

SPECSpeed®2017_fp_peak = 358

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/lijq/lib/intel64:/home/lijq/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

- Enable LP [Global] set to Single LP
- LLC Prefetch set to Enabled
- SNC (Sub NUMA) set to Disabled
- Patrol Scrub set to Disabled
- LLC dead line alloc set to Disabled
- XPT Prefetch set to Enabled
- KTI Prefetch set to Disabled
- DCU Streamer Prefetcher set to Disabled
- Hardware P-States set to Native Mode

Sysinfo program /home/lijq/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Mar 9 12:36:21 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

23. BIOS

1. `uname -a`

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

2. `w`

```
12:36:21 up 1:04, 1 user, load average: 0.05, 0.02, 0.00
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      pts/0    10.2.48.216   12:33      45.00s     0.76s  0.00s  -bash
```

3. Username

```
From environment variable $USER: root
```

4. `ulimit -a`

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4125241
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125241
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. `sysinfo process ancestry`

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 32
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define
drop_caches fpspeed
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
runcpu --nobuild --reportable --iterations 3 --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.046/templogs/preenv.fpspeed.046.0.log --lognum 046.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/lijq
```

```
-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Gold 6458Q
   vendor_id       : GenuineIntel
   cpu family      : 6
   model           : 143
   stepping        : 8
   microcode       : 0x2b000111
   bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores       : 32
   siblings        : 32
   2 physical ids (chips)
   64 processors (hardware threads)
   physical id 0:  core ids 0-31
   physical id 1:  core ids 0-31
   physical id 0:  apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
   physical id 1:  apicids
   128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
   80,182,184,186,188,190
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             64
On-line CPU(s) list: 0-63
Vendor ID:          GenuineIntel
Model name:         Intel(R) Xeon(R) Gold 6458Q
CPU family:         6
Model:              143
Thread(s) per core: 1
Core(s) per socket: 32
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

Socket(s) :                2
Stepping:                  8
CPU max MHz:               4000.0000
CPU min MHz:               800.0000
BogoMIPS:                  6200.00
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                           nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                           vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                           x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                           abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                           intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                           flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                           erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                           clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                           xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                           split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                           hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                           avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                           avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                           enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                           amx_tile flush_llid arch_capabilities

Virtualization:            VT-x
L1d cache:                 3 MiB (64 instances)
L1i cache:                 2 MiB (64 instances)
L2 cache:                  128 MiB (64 instances)
L3 cache:                  120 MiB (2 instances)
NUMA node(s):              2
NUMA node0 CPU(s):         0-31
NUMA node1 CPU(s):         32-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 515573 MB
node 0 free: 513451 MB
node 1 cpus: 32-63
node 1 size: 515758 MB
node 1 free: 514626 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

9. /proc/meminfo

```
MemTotal:          1056084264 kB
```

10. who -r

```
run-level 3 Mar 9 11:31
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target  Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings kdump
                kdump-early nvme-fc-boot-connections postfix purge-kernels rollback sshd wickd
                wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                exchange-bmc-os-info grub2-once haveged-switch-root ipmiev-d issue-add-ssh-keys kexec-load
                nfs nfs-blkmap nvme-f-autoconnect rpcbind rpmconfigcheck serial-getty@
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd tuned
indirect       wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9e7d079b-be10-4779-89e1-79f870e2ca09
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=300M,high
crashkernel=72M,low
```

14. cpupower frequency-info
analyzing CPU 0:

current policy: frequency should be within 800 MHz and 4.00 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer+madvice [madvice] never
enabled [always] madvice never

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

20. Disk information
SPEC is set to: /home/lijq
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 btrfs 854G 299G 555G 36% /home

21. /sys/devices/virtual/dmi/id
Vendor: Nettrix
Product: R620 G50
Product Family: Rack
Serial: 6101810603447822

22. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: NNH1041018-U00-1
BIOS Date: 11/01/2022

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Revision: 5.29

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_fp_base = 357

R620 G50 (Intel Xeon Gold 6458Q, 3.10 GHz)

SPECspeed®2017_fp_peak = 358

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Mar-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-08 23:36:21-0500.
Report generated on 2023-03-29 00:34:13 by CPU2017 PDF formatter v6442.
Originally published on 2023-03-28.