



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

**SPECSpeed®2017\_fp\_base = 387**

**SPECSpeed®2017\_fp\_peak = 387**

CPU2017 License: 001176


Test Date: Apr-2023

Test Sponsor: Supermicro

Hardware Availability: Mar-2023

Tested by: Supermicro

Software Availability: Dec-2022

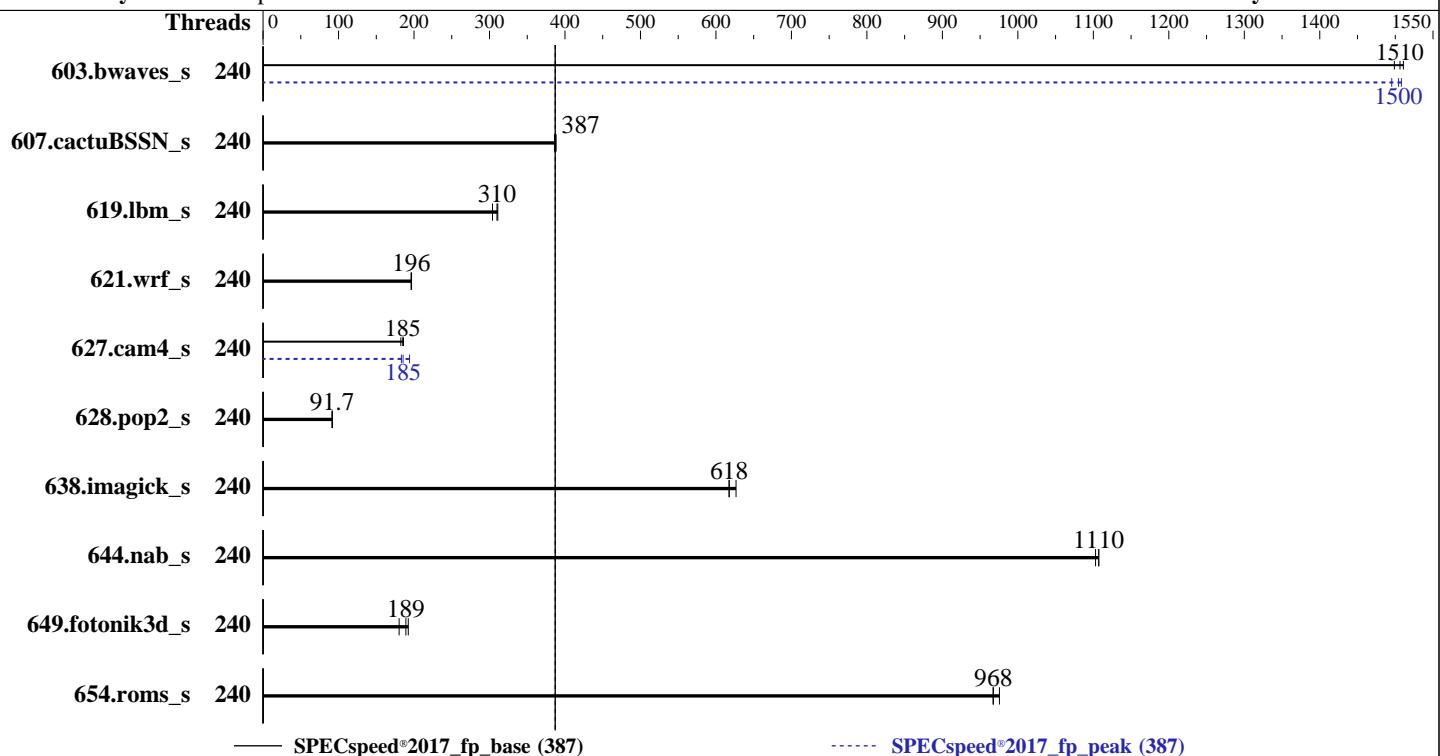

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
Max MHz: 3500  
Nominal: 1900  
Enabled: 240 cores, 4 chips  
Orderable: 4 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 112.5 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)  
Storage: 1 x 1.90 TB NVMe SSD  
Other: None

### Software

OS: Ubuntu 22.04.2 LTS  
Compiler: 5.19.0-40-generic  
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
C/C++: Version 2023.0 of Intel C/C++ Compiler for Linux  
Parallel: Yes  
Firmware: Version 1.2 released Mar-2023  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

**SPECSpeed®2017\_fp\_base = 387**

**SPECSpeed®2017\_fp\_peak = 387**

CPU2017 License: 001176

Test Date: Apr-2023

Test Sponsor: Supermicro

Hardware Availability: Mar-2023

Tested by: Supermicro

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	240	39.1	1510	39.4	1500	<b>39.2</b>	<b>1510</b>	240	<b>39.2</b>	<b>1500</b>	39.1	1510	39.5	1500
607.cactuBSSN_s	240	42.9	388	<b>43.0</b>	<b>387</b>	43.2	386	240	42.9	388	<b>43.0</b>	<b>387</b>	43.2	386
619.lbm_s	240	17.2	304	<b>16.9</b>	<b>310</b>	16.8	311	240	<b>17.2</b>	<b>304</b>	<b>16.9</b>	<b>310</b>	16.8	311
621.wrf_s	240	67.4	196	<b>67.3</b>	<b>196</b>	67.2	197	240	67.4	196	<b>67.3</b>	<b>196</b>	67.2	197
627.cam4_s	240	48.6	183	<b>47.9</b>	<b>185</b>	47.6	186	240	48.4	183	<b>45.7</b>	<b>194</b>	<b>47.8</b>	<b>185</b>
628.pop2_s	240	129	91.7	<b>129</b>	<b>91.7</b>	130	91.5	240	129	91.7	<b>129</b>	<b>91.7</b>	130	91.5
638.imagick_s	240	<b>23.4</b>	<b>618</b>	23.0	627	23.4	617	240	<b>23.4</b>	<b>618</b>	23.0	627	23.4	617
644.nab_s	240	15.8	1110	<b>15.8</b>	<b>1110</b>	15.8	1100	240	15.8	1110	<b>15.8</b>	<b>1110</b>	15.8	1100
649.fotonik3d_s	240	47.4	192	50.6	180	<b>48.2</b>	<b>189</b>	240	47.4	192	50.6	180	<b>48.2</b>	<b>189</b>
654.roms_s	240	16.1	976	<b>16.3</b>	<b>968</b>	16.3	967	240	16.1	976	<b>16.3</b>	<b>968</b>	16.3	967

**SPECSpeed®2017\_fp\_base = 387**

**SPECSpeed®2017\_fp\_peak = 387**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_fp\_base = 387

SPECspeed®2017\_fp\_peak = 387

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Platform Notes

BIOS Settings:  
Hyper-Threading = Disable  
Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Extreme Performance

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on lab-Super-Server Thu Apr 20 15:01:26 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

-----

1. uname -a  
Linux lab-Super-Server 5.19.0-40-generic #41~22.04.1-Ubuntu SMP PREEMPT\_DYNAMIC Fri Mar 31 16:00:14 UTC 2023  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
15:01:26 up 3:42, 2 users, load average: 5.79, 5.95, 3.50  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 - 11:20 3:39m 1.16s 0.01s -bash  
root ttym2 - 11:45 3:12m 0.15s 0.05s -bash

-----

3. Username  
From environment variable \$USER: root

-----

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

SPECSpeed®2017\_fp\_base = 387

SPECSpeed®2017\_fp\_peak = 387

CPU2017 License: 001176

Test Date: Apr-2023

Test Sponsor: Supermicro

Hardware Availability: Mar-2023

Tested by: Supermicro

Software Availability: Dec-2022

## Platform Notes (Continued)

```
coredump(blocks)      0
memory(kbytes)       unlimited
locked memory(kbytes) 132060596
process              4126801
nofiles              1024
vmmemory(kbytes)     unlimited
locks                unlimited
rtprio               0

-----
5. sysinfo process ancestry
/lib/systemd/systemd splash --switched-root --system --deserialize 30
/bin/login -p --
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base,peak -o all --define
    drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id        : GenuineIntel
cpu family       : 6
model            : 143
stepping          : 6
microcode        : 0x2b0001b0
bugs              : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss
cpu cores         : 60
siblings          : 60
4 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
0,362,364,366,368,370,372,374
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
8,490,492,494,496,498,500,502
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 387

SPECspeed®2017\_fp\_peak = 387

CPU2017 License: 001176

Test Date: Apr-2023

Test Sponsor: Supermicro

Hardware Availability: Mar-2023

Tested by: Supermicro

Software Availability: Dec-2022

## Platform Notes (Continued)

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 240
On-line CPU(s) list:   0-239
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8490H
CPU family:              6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    60
Socket(s):              4
Stepping:               6
Frequency boost:        enabled
CPU max MHz:            1901.0000
CPU min MHz:            800.0000
BogoMIPS:                3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                        invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmr flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2
                        erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
                        cldemote movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_ll1d
                        arch_capabilities
Virtualization:          VT-x
L1d cache:                11.3 MiB (240 instances)
L1i cache:                7.5 MiB (240 instances)
L2 cache:                 480 MiB (240 instances)
L3 cache:                 450 MiB (4 instances)
NUMA node(s):              4
NUMA node0 CPU(s):        0-59
NUMA node1 CPU(s):        60-119
NUMA node2 CPU(s):        120-179
NUMA node3 CPU(s):        180-239
Vulnerability Itlb multihit: Not affected
Vulnerability Llft:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 387

SPECspeed®2017\_fp\_peak = 387

CPU2017 License: 001176

Test Date: Apr-2023

Test Sponsor: Supermicro

Hardware Availability: Mar-2023

Tested by: Supermicro

Software Availability: Dec-2022

## Platform Notes (Continued)

```
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K    11.3M   12 Data        1       64      1          64
  L1i     32K     7.5M    8 Instruction  1       64      1          64
  L2      2M     480M   16 Unified      2      2048      1          64
  L3    112.5M   450M   15 Unified      3     122880      1          64

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0-59
node 0 size: 257670 MB
node 0 free: 256622 MB
node 1 cpus: 60-119
node 1 size: 258033 MB
node 1 free: 246177 MB
node 2 cpus: 120-179
node 2 size: 258033 MB
node 2 free: 257370 MB
node 3 cpus: 180-239
node 3 size: 257986 MB
node 3 free: 253269 MB
node distances:
node   0   1   2   3
  0: 10  21  21  21
  1: 21  10  21  21
  2: 21  21  10  21
  3: 21  21  21  10

-----
9. /proc/meminfo
MemTotal:      1056484772 kB

-----
10. who -r
run-level 3 Apr 20 11:19

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
Default Target  Status
multi-user      running

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
               accounts-daemon anacron apparmor avahi-daemon blk-availability bluetooth console-setup
               cron cups cups-browsed dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common
               grub-initrd-fallback irqbalance kerneloops keyboard-setup lvm2-monitor networkd-dispatcher
               openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd switcheroo-control
               systemd-oomd systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds
               ubuntu-adantage udisks2 ufw unattended-upgrades wpa_supplicant
               netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled        acpid console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@ rsync
               rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_fp\_base = 387

SPECspeed®2017\_fp\_peak = 387

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```
systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext
systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@  
generated apport speech-dispatcher  
indirect saned@ spice-vdagentd uidd  
masked alsa-utils brltty cryptdisks cryptdisks-early hwclock lvm2 pulseaudio-enable-autospawn rc
rcS saned sudo x11-common

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.19.0-40-generic
root=UUID=ef355ee2-552e-45b1-8747-bcfdbcd598b
ro
quiet
splash
vt.handoff=7

-----  
14. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----  
15. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          always [madvise] never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----  
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000

-----  
17. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.2 LTS
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECSpeed®2017\_fp\_base = 387

SPECSpeed®2017\_fp\_peak = 387

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

### 18. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	ext4	1.8T	61G	1.6T	4%	/

### 19. /sys/devices/virtual/dmi/id

Vendor:	Supermicro
Product:	Super Server
Product Family:	Family
Serial:	0123456789

### 20. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

32x NO DIMM NO DIMM
32x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800

### 21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	American Megatrends International, LLC.
BIOS Version:	1.2
BIOS Date:	03/17/2023
BIOS Revision:	5.29

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 607.cactusBSSN\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 387

SPECspeed®2017\_fp\_peak = 387

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 387

SPECspeed®2017\_fp\_peak = 387

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-futo -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

SPECspeed®2017\_fp\_base = 387

SPECspeed®2017\_fp\_peak = 387

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer SYS-241H-TNRTTP  
(X13QEH+, Intel Xeon Platinum 8490H)

**SPECSpeed®2017\_fp\_base = 387**

**SPECSpeed®2017\_fp\_peak = 387**

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Apr-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-20 18:01:25-0400.

Report generated on 2023-05-09 17:20:48 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.