



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECSpeed®2017\_fp\_base = 263**

**SPECSpeed®2017\_fp\_peak = 263**

CPU2017 License: 3


**Test Date:** May-2023

**Test Sponsor:** HPE

**Hardware Availability:** May-2023

**Tested by:** HPE

**Software Availability:** Dec-2022

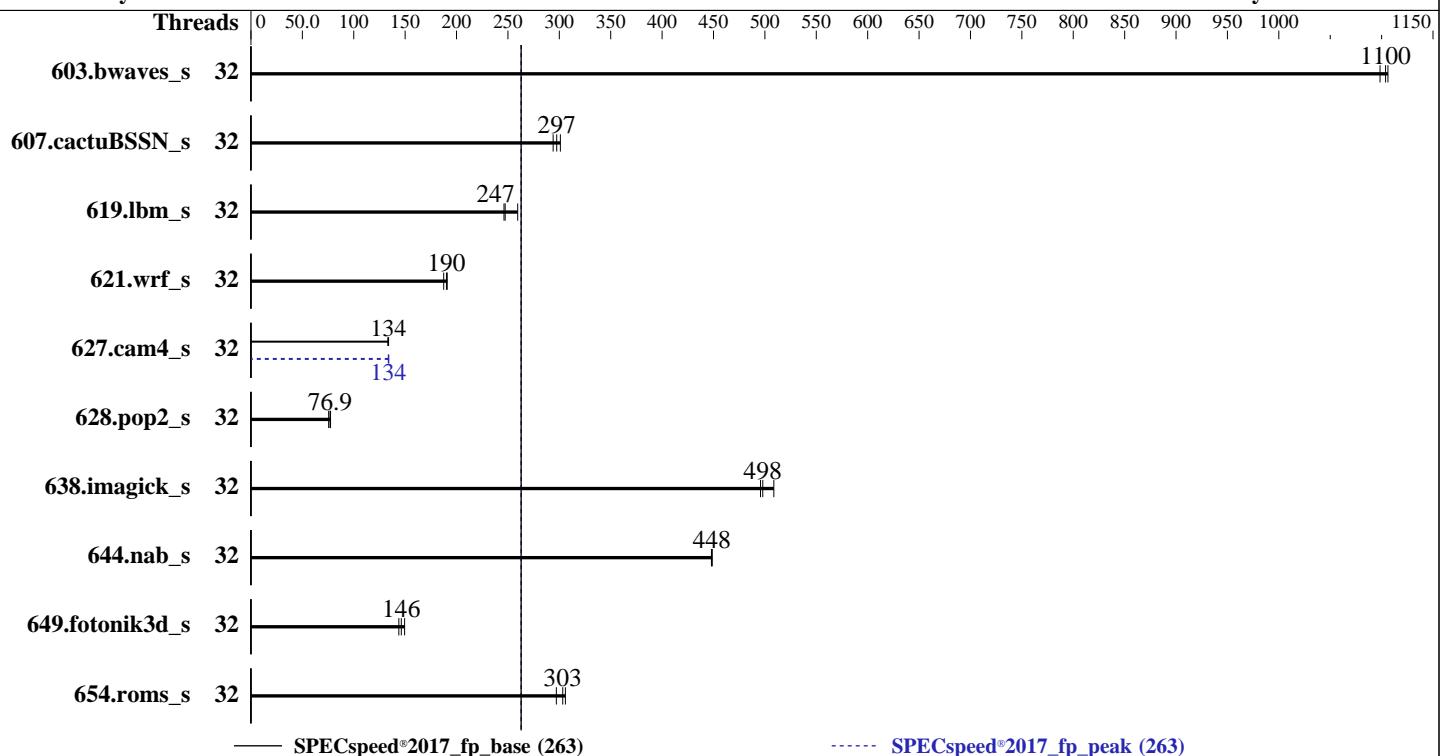

— SPECSpeed®2017\_fp\_base (263)

----- SPECSpeed®2017\_fp\_peak (263)

## Hardware

CPU Name: Intel Xeon Gold 6434H  
 Max MHz: 4100  
 Nominal: 3700  
 Enabled: 32 cores, 4 chips  
 Orderable: 1, 2, 4 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## OS:

SUSE Linux Enterprise Server 15 SP4

Kernel 5.14.21-150400.22-default

C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

C/C++: Version 2023.0 of Intel C/C++ Compiler for Linux

Parallel: Yes

Firmware: HPE BIOS Version v1.30 03/01/2023 released Mar-2023

File System: btrfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 64-bit

Other: jemalloc memory allocator V5.0.1

System State: Base Pointers:

Peak Pointers:

Other:

Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

Test Date: May-2023

Test Sponsor: HPE

Hardware Availability: May-2023

Tested by: HPE

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	53.7	1100	53.3	1110	<b>53.4</b>	<b>1100</b>	32	53.7	1100	53.3	1110	<b>53.4</b>	<b>1100</b>
607.cactuBSSN_s	32	56.7	294	<b>56.0</b>	<b>297</b>	55.4	301	32	56.7	294	<b>56.0</b>	<b>297</b>	55.4	301
619.lbm_s	32	<b>21.2</b>	<b>247</b>	20.2	260	21.3	246	32	<b>21.2</b>	<b>247</b>	20.2	260	21.3	246
621.wrf_s	32	69.3	191	<b>69.5</b>	<b>190</b>	70.5	188	32	69.3	191	<b>69.5</b>	<b>190</b>	70.5	188
627.cam4_s	32	66.2	134	66.6	133	<b>66.3</b>	<b>134</b>	32	66.1	134	<b>66.2</b>	<b>134</b>	66.3	134
628.pop2_s	32	153	77.4	<b>154</b>	<b>76.9</b>	157	75.6	32	153	77.4	<b>154</b>	<b>76.9</b>	157	75.6
638.imagick_s	32	28.4	509	29.1	496	<b>29.0</b>	<b>498</b>	32	28.4	509	29.1	496	<b>29.0</b>	<b>498</b>
644.nab_s	32	39.0	448	<b>39.0</b>	<b>448</b>	38.9	449	32	39.0	448	<b>39.0</b>	<b>448</b>	38.9	449
649.fotonik3d_s	32	63.4	144	<b>62.3</b>	<b>146</b>	61.0	149	32	63.4	144	<b>62.3</b>	<b>146</b>	61.0	149
654.roms_s	32	<b>51.9</b>	<b>303</b>	53.0	297	51.5	306	32	<b>51.9</b>	<b>303</b>	53.0	297	51.5	306

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

IRQ balance service was stopped using "systemctl stop irqbalance.service"

tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

perf-bias for all the CPUs is set using "cpupower set -b 0"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0001b0 for the Intel Xeon Gold 6434H Processor

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Workload Profile set to Custom

Intel DMI Link Frequency set to Gen2 Speed

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Minimum Processor Idle Power Core C-State set to C1E State

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Fri May 12 20:22:59 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

-----  
1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
12. Services, from systemctl list-unit-files  
13. Linux kernel boot-time arguments, from /proc/cmdline  
14. cpupower frequency-info  
15. tuned-adm active  
16. sysctl  
17. /sys/kernel/mm/transparent\_hugepage  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
19. OS release  
20. Disk information  
21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. w  
20:23:00 up 26 min, 2 users, load average: 1.12, 0.38, 0.13  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
root      tty1      -          28May22 349days  0.01s  0.01s -bash
root      pts/0     172.16.0.100  28May22 11.00s  0.73s  0.00s -bash
```

---

### 3. Username

```
From environment variable $USER: root
```

---

### 4. ulimit -a

```
core file size      (blocks, -c) unlimited
data seg size       (kbytes, -d) unlimited
scheduling priority (-e) 0
file size           (blocks, -f) unlimited
pending signals     (-i) 4126774
max locked memory   (kbytes, -l) 64
max memory size     (kbytes, -m) unlimited
open files          (-n) 1024
pipe size           (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority   (-r) 0
stack size           (kbytes, -s) unlimited
cpu time             (seconds, -t) unlimited
max user processes    (-u) 4126774
virtual memory        (kbytes, -v) unlimited
file locks            (-x) unlimited
```

---

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak -o all --define
  drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

---

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6434H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 7
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 8
siblings        : 8
4 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 2: core ids 0-7
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

**Test Date:** May-2023

Test Sponsor: HPE

**Hardware Availability:** May-2023

Tested by: HPE

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
physical id 3: core ids 0-7
physical id 0: apicids 0,2,4,6,8,10,12,14
physical id 1: apicids 128,130,132,134,136,138,140,142
physical id 2: apicids 256,258,260,262,264,266,268,270
physical id 3: apicids 384,386,388,390,392,394,396,398
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 6434H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 4
Stepping: 7
BogoMIPS: 7400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
        nonstop_tsc cpuid aperf fmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor
        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
        invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep
        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
        tsxlptrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
        VT-x
Virtualization:
L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 64 MiB (32 instances)
L3 cache: 90 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-3,16-19
NUMA node1 CPU(s): 4-7,20-23
NUMA node2 CPU(s): 8-11,24-27
NUMA node3 CPU(s): 12-15,28-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

**Test Date:** May-2023

Test Sponsor: HPE

**Hardware Availability:** May-2023

Tested by: HPE

**Software Availability:** Dec-2022

## Platform Notes (Continued)

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	22.5M	90M	15	Unified	3	24576	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-3,16-19

node 0 size: 257632 MB

node 0 free: 256961 MB

node 1 cpus: 4-7,20-23

node 1 size: 258011 MB

node 1 free: 257771 MB

node 2 cpus: 8-11,24-27

node 2 size: 258045 MB

node 2 free: 257615 MB

node 3 cpus: 12-15,28-31

node 3 size: 258025 MB

node 3 free: 257734 MB

node distances:

node 0 1 2 3

0: 10 20 20 20

1: 20 10 20 20

2: 20 20 10 20

3: 20 20 20 10

-----  
9. /proc/meminfo

MemTotal: 1056476696 kB

-----  
10. who -r

run-level 3 May 28 18:12

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status

multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings lvm2-monitor postfix purge-kernels rollback sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	blk-availability boot-sysctl ca-certificates chrony-wait chronyrd console-getty debug-shell grub2-once haveged-switch-root issue-add-ssh-keys kexec-load lunmask rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect	wickedd

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 263

SPECspeed®2017\_fp\_peak = 263

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=72869edb-9690-495c-9412-e3607826b515  
splash=silent  
quiet  
security=apparmor  
mitigations=auto

-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    Unable to determine current policy  
    boost state support:  
        Supported: yes  
        Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sdb2 btrfs 445G 29G 416G 7% /home

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: HPE  
Product: ProLiant DL560 Gen11  
Product Family: ProLiant  
Serial: CNX22605RZ

-----  
22. dmidecode  
Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
28x Hynix HMCG88AEBRA168N 32 GB 2 rank 4800  
3x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800  
1x Hynix HMCG88MEBRA115N 32 GB 2 rank 4800

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HPE  
BIOS Version: 1.30  
BIOS Date: 03/01/2023  
BIOS Revision: 1.30  
Firmware Revision: 1.20

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** May-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen11

(3.70 GHz, Intel Xeon Gold 6434H)

**SPECspeed®2017\_fp\_base = 263**

**SPECspeed®2017\_fp\_peak = 263**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-12 10:52:59-0400.

Report generated on 2023-06-06 19:13:03 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.