



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR665 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_energy_base = 748

SPECspeed®2017_fp_peak = 322

SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

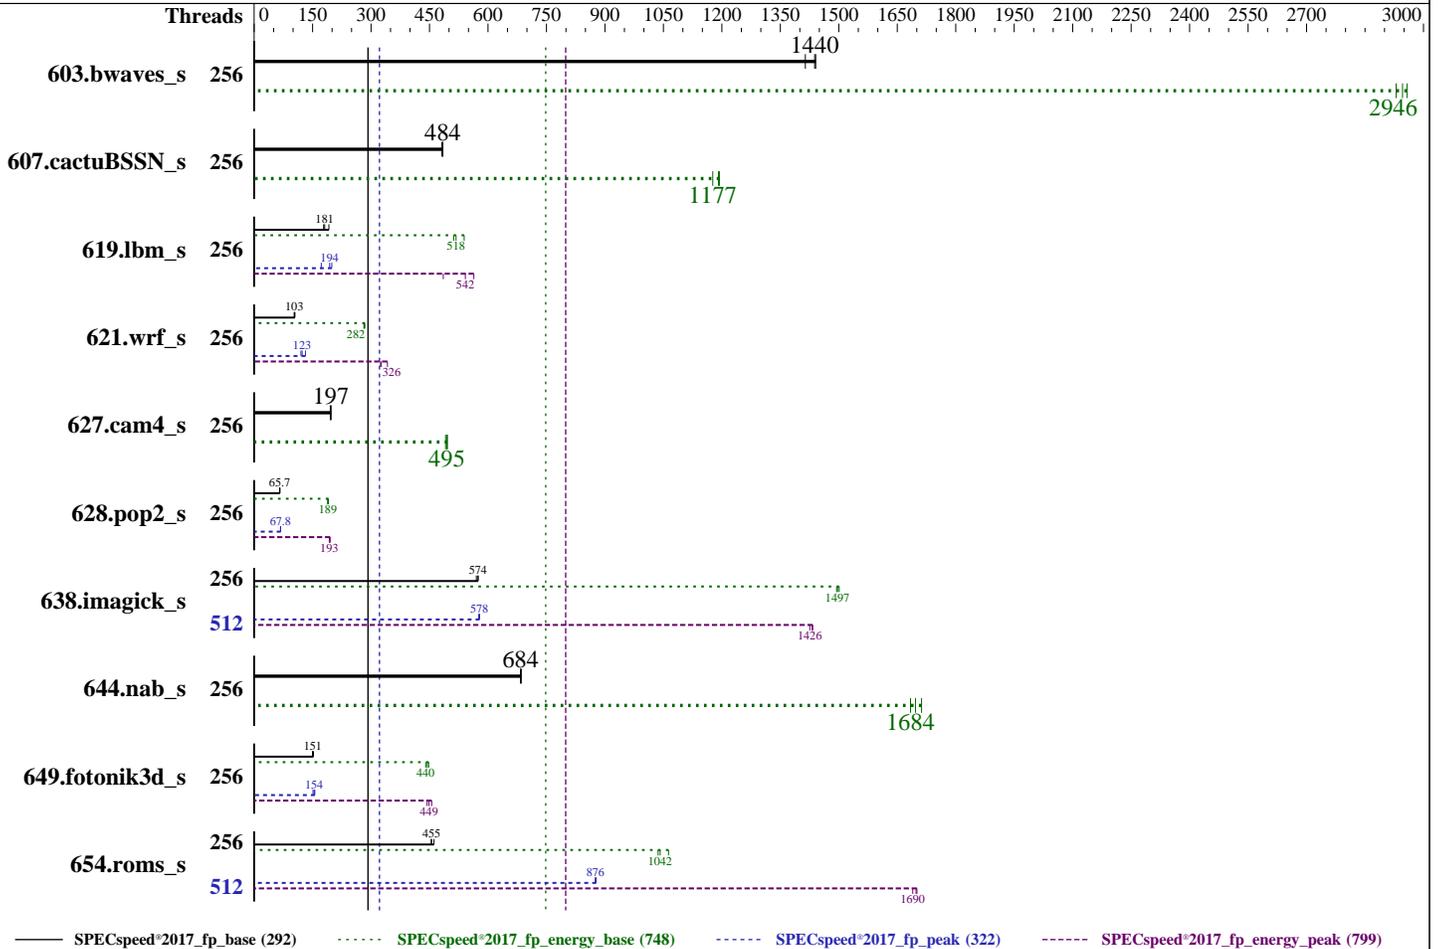

Hardware	Software
CPU Name: AMD EPYC 9754	OS: SUSE Linux Enterprise Server 15 SP4
Max MHz: 3100	kernel version 5.14.21-150400.22-default
Nominal: 2250	Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
Enabled: 256 cores, 2 chips, 2 threads/core	Parallel: Yes
Orderable: 1,2 chips	Firmware: Lenovo BIOS Version KAE111J 2.10 released May-2023
Cache L1: 32 KB I + 32 KB D on chip per core	File System: xfs
L2: 1 MB I+D on chip per core	System State: Run level 3 (multi-user)
L3: 256 MB I+D on chip per chip,	Base Pointers: 64-bit
16 MB shared / 8 cores	Peak Pointers: 64-bit
Other: None	Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)	Power Management: BIOS and OS set to balance power and performance
Storage: 1 x 480 GB SATA SSD	
Other: None	



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR665 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292
SPECspeed®2017_fp_energy_base = 748
SPECspeed®2017_fp_peak = 322
SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Power

Max. Power (W): 718.3
Idle Power (W): 118.93
Min. Temperature (C): 25.38
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 2.10 of KAX317G
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 1100 W (non-redundant)
Details: ThinkSystem 1100W Titanium Power Supply 4P57A72666
Backplane: 8 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #: 4XB7A82259
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #: 6 x Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UG05013E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: GRG METROLOGY & TEST (BEIJING) CO., LTD.
Calibration Label: J202210116758A-0007
Calibration Date: 19-Oct-2022
PTDaemon® Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: Connected to PSU1
Current Ranges Used: 5A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W63390099
Input Connection: USB
PTDaemon Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	256	41.7	1410	21.8	2960	522	550	41.0	1440	22.0	2930	537	561	41.0	1440	21.8	2950	533	560
607.cactuBSSN_s	256	34.6	481	15.3	1190	442	463	34.4	484	15.5	1180	450	467	34.4	484	15.3	1190	444	465
619.lbm_s	256	29.4	178	11.6	512	396	439	27.3	192	11.0	539	404	444	28.9	181	11.5	518	397	441
621.wrf_s	256	128	103	51.1	282	399	404	126	105	50.8	284	402	406	128	103	51.3	282	400	404
627.cam4_s	256	45.3	195	19.6	491	433	461	45.0	197	19.4	496	432	465	45.0	197	19.5	495	433	462
628.pop2_s	256	181	65.7	69.1	189	382	387	181	65.7	68.9	189	381	387	180	66.1	68.5	191	381	387
638.imagick_s	256	25.1	575	10.5	1490	419	634	25.3	570	10.5	1500	414	633	25.1	574	10.5	1500	418	636
644.nab_s	256	25.6	684	11.3	1680	442	499	25.5	685	11.1	1710	435	502	25.6	684	11.2	1700	438	503
649.fotonik3d_s	256	60.6	151	23.3	440	384	470	60.9	150	23.0	444	378	465	59.9	152	22.9	448	382	471
654.roms_s	256	34.7	454	17.0	1040	490	512	34.1	461	16.6	1060	485	507	34.6	455	16.9	1040	489	509

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_energy_base = 748

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR665 V3 (2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base = 292

SPECSpeed®2017_fp_energy_base = 748

SPECSpeed®2017_fp_peak = 322

SPECSpeed®2017_fp_energy_peak = 799

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	256	41.7	1410	21.8	2960	522	550	41.0	1440	22.0	2930	537	561	41.0	1440	21.8	2950	533	560
607.cactuBSSN_s	256	34.6	481	15.3	1190	442	463	34.4	484	15.5	1180	450	467	34.4	484	15.3	1190	444	465
619.lbm_s	256	26.3	199	10.6	564	402	446	27.0	194	11.0	542	406	444	30.4	172	12.3	485	403	444
621.wrf_s	256	110	120	44.5	324	404	412	107	123	44.3	326	412	427	100	132	42.2	342	421	428
627.cam4_s	256	45.3	195	19.6	491	433	461	45.0	197	19.4	496	432	465	45.0	197	19.5	495	433	462
628.pop2_s	256	174	68.1	66.9	195	384	389	175	67.8	67.5	193	385	390	175	67.8	67.6	193	386	392
638.imagick_s	512	24.9	578	11.0	1430	440	712	25.0	576	11.0	1430	439	718	25.0	578	11.0	1430	442	714
644.nab_s	256	25.6	684	11.3	1680	442	499	25.5	685	11.1	1710	435	502	25.6	684	11.2	1700	438	503
649.fotonik3d_s	256	60.3	151	23.1	444	382	475	58.5	156	22.5	455	384	478	59.2	154	22.8	449	385	478
654.roms_s	512	18.0	876	10.4	1690	579	644	18.0	875	10.4	1700	576	648	17.9	878	10.4	1700	578	646

SPECSpeed®2017_fp_peak = 322

SPECSpeed®2017_fp_energy_peak = 799

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

To disable THP for peak runs of 621.wrf_s:

'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR665 V3 (2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base =	292
SPECSpeed®2017_fp_energy_base =	748
SPECSpeed®2017_fp_peak =	322
SPECSpeed®2017_fp_energy_peak =	799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Operating System Notes (Continued)

```
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-511"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-amd-aocc400_znver4_A1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "512"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-255"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-255"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-255"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-511"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-255"
PGHPPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0 256 1 257 2 258 3 259 4 260 5 261 6 262 7 263 8 264 9 265 10 266 11 267 12 268 13
269 14 270 15 271 16 272 17 273 18 274 19 275 20 276 21 277 22 278 23 279 24 280 25 281 26 282 27 283
28 284 29 285 30 286 31 287 32 288 33 289 34 290 35 291 36 292 37 293 38 294 39 295 40 296 41 297 42
298 43 299 44 300 45 301 46 302 47 303 48 304 49 305 50 306 51 307 52 308 53 309 54 310 55 311 56 312
57 313 58 314 59 315 60 316 61 317 62 318 63 319 64 320 65 321 66 322 67 323 68 324 69 325 70 326 71
327 72 328 73 329 74 330 75 331 76 332 77 333 78 334 79 335 80 336 81 337 82 338 83 339 84 340 85 341
86 342 87 343 88 344 89 345 90 346 91 347 92 348 93 349 94 350 95 351 96 352 97 353 98 354 99 355 100
356 101 357 102 358 103 359 104 360 105 361 106 362 107 363 108 364 109 365 110 366 111 367 112 368
113 369 114 370 115 371 116 372 117 373 118 374 119 375 120 376 121 377 122 378 123 379 124 380 125
381 126 382 127 383 128 384 129 385 130 386 131 387 132 388 133 389 134 390 135 391 136 392 137 393
138 394 139 395 140 396 141 397 142 398 143 399 144 400 145 401 146 402 147 403 148 404 149 405 150
406 151 407 152 408 153 409 154 410 155 411 156 412 157 413 158 414 159 415 160 416 161 417 162 418
163 419 164 420 165 421 166 422 167 423 168 424 169 425 170 426 171 427 172 428 173 429 174 430 175
431 176 432 177 433 178 434 179 435 180 436 181 437 182 438 183 439 184 440 185 441 186 442 187 443
188 444 189 445 190 446 191 447 192 448 193 449 194 450 195 451 196 452 197 453 198 454 199 455 200
456 201 457 202 458 203 459 204 460 205 461 206 462 207 463 208 464 209 465 210 466 211 467 212 468
213 469 214 470 215 471 216 472 217 473 218 474 219 475 220 476 221 477 222 478 223 479 224 480 225
481 226 482 227 483 228 484 229 485 230 486 231 487 232 488 233 489 234 490 235 491 236 492 237 493
238 494 239 495 240 496 241 497 242 498 243 499 244 500 245 501 246 502 247 503 248 504 249 505 250
506 251 507 252 508 253 509 254 510 255 511"
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base = 292
SPECSpeed®2017_fp_energy_base = 748
SPECSpeed®2017_fp_peak = 322
SPECSpeed®2017_fp_energy_peak = 799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Operating Mode set to Custom Mode
ACPI SRAT L3 Cache as NUMA Domain set to Enabled
Core Performance Boost set to Disabled
DF P-states set to P1

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400_znver4_A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu May 18 18:24:41 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR665 V3 (2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base =	292
SPECSpeed®2017_fp_energy_base =	748
SPECSpeed®2017_fp_peak =	322
SPECSpeed®2017_fp_energy_peak =	799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```
-----
2. w
   18:24:41 up 56 min,  1 user,  load average: 0.22, 0.26, 14.46
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -             17:29   16.00s  2.38s  0.32s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

-----
3. Username
   From environment variable $USER:  root

-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 3093976
   max locked memory      (kbytes, -l) 2097152
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size            (kbytes, -s) unlimited
   cpu time              (seconds, -t) unlimited
   max user processes     (-u) 3093976
   virtual memory         (kbytes, -v) unlimited
   file locks            (-x) unlimited

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   /bin/bash ./speedfp.sh
   /bin/bash ./Run036-compliant-amd-speedfp.sh
   python3 ./run_amd_speed_aocc400_znver4_A1.py
   /bin/bash ./amd_speed_aocc400_znver4_A1.sh
   runcpu --power --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
   runcpu --power --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --runmode
   speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.062/templogs/preenv.fpspeed.062.0.log --lognum 062.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017-1.1.9-amd-aocc400_znver4_A1

-----
6. /proc/cpuinfo
   model name      : AMD EPYC 9754 128-Core Processor
   vendor_id      : AuthenticAMD
   cpu family     : 25
   model          : 160
   stepping       : 2
   microcode      : 0xaa00208
   bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
   TLB size       : 3584 4K pages
   cpu cores      : 128
   siblings       : 256
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR665 V3 (2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base =	292
SPECSpeed®2017_fp_energy_base =	748
SPECSpeed®2017_fp_peak =	322
SPECSpeed®2017_fp_energy_peak =	799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                512
On-line CPU(s) list:   0-511
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9754 128-Core Processor
CPU family:            25
Model:                 160
Thread(s) per core:   2
Core(s) per socket:   128
Socket(s):             2
Stepping:              2
Frequency boost:       disabled
CPU max MHz:          3100.3411
CPU min MHz:          1500.0000
BogoMIPS:              4493.42
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        cflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             8 MiB (256 instances)
L1i cache:             8 MiB (256 instances)
L2 cache:              256 MiB (256 instances)
L3 cache:              512 MiB (32 instances)
NUMA node(s):         32
NUMA node0 CPU(s):    0-7,256-263
NUMA node1 CPU(s):    8-15,264-271
NUMA node2 CPU(s):    16-23,272-279
NUMA node3 CPU(s):    24-31,280-287
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR665 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292
SPECspeed®2017_fp_energy_base = 748
SPECspeed®2017_fp_peak = 322
SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```

NUMA node4 CPU(s):      32-39,288-295
NUMA node5 CPU(s):      40-47,296-303
NUMA node6 CPU(s):      48-55,304-311
NUMA node7 CPU(s):      56-63,312-319
NUMA node8 CPU(s):      64-71,320-327
NUMA node9 CPU(s):      72-79,328-335
NUMA node10 CPU(s):     80-87,336-343
NUMA node11 CPU(s):     88-95,344-351
NUMA node12 CPU(s):     96-103,352-359
NUMA node13 CPU(s):    104-111,360-367
NUMA node14 CPU(s):    112-119,368-375
NUMA node15 CPU(s):    120-127,376-383
NUMA node16 CPU(s):    128-135,384-391
NUMA node17 CPU(s):    136-143,392-399
NUMA node18 CPU(s):    144-151,400-407
NUMA node19 CPU(s):    152-159,408-415
NUMA node20 CPU(s):    160-167,416-423
NUMA node21 CPU(s):    168-175,424-431
NUMA node22 CPU(s):    176-183,432-439
NUMA node23 CPU(s):    184-191,440-447
NUMA node24 CPU(s):    192-199,448-455
NUMA node25 CPU(s):    200-207,456-463
NUMA node26 CPU(s):    208-215,464-471
NUMA node27 CPU(s):    216-223,472-479
NUMA node28 CPU(s):    224-231,480-487
NUMA node29 CPU(s):    232-239,488-495
NUMA node30 CPU(s):    240-247,496-503
NUMA node31 CPU(s):    248-255,504-511
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                             filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 32 nodes (0-31)
node 0 cpus: 0-7,256-263
node 0 size: 23936 MB
node 0 free: 23127 MB
node 1 cpus: 8-15,264-271
node 1 size: 24187 MB
node 1 free: 24002 MB
node 2 cpus: 16-23,272-279

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_energy_base = 748

SPECspeed®2017_fp_peak = 322

SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 2 size: 24153 MB
node 2 free: 23961 MB
node 3 cpus: 24-31,280-287
node 3 size: 24187 MB
node 3 free: 24008 MB
node 4 cpus: 32-39,288-295
node 4 size: 24187 MB
node 4 free: 23989 MB
node 5 cpus: 40-47,296-303
node 5 size: 24187 MB
node 5 free: 24009 MB
node 6 cpus: 48-55,304-311
node 6 size: 24187 MB
node 6 free: 23965 MB
node 7 cpus: 56-63,312-319
node 7 size: 24187 MB
node 7 free: 23970 MB
node 8 cpus: 64-71,320-327
node 8 size: 24187 MB
node 8 free: 23975 MB
node 9 cpus: 72-79,328-335
node 9 size: 24187 MB
node 9 free: 23555 MB
node 10 cpus: 80-87,336-343
node 10 size: 24187 MB
node 10 free: 23955 MB
node 11 cpus: 88-95,344-351
node 11 size: 24187 MB
node 11 free: 23968 MB
node 12 cpus: 96-103,352-359
node 12 size: 24187 MB
node 12 free: 23972 MB
node 13 cpus: 104-111,360-367
node 13 size: 24187 MB
node 13 free: 23993 MB
node 14 cpus: 112-119,368-375
node 14 size: 24187 MB
node 14 free: 24003 MB
node 15 cpus: 120-127,376-383
node 15 size: 24187 MB
node 15 free: 24005 MB
node 16 cpus: 128-135,384-391
node 16 size: 24187 MB
node 16 free: 24019 MB
node 17 cpus: 136-143,392-399
node 17 size: 24187 MB
node 17 free: 23973 MB
node 18 cpus: 144-151,400-407
node 18 size: 24187 MB
node 18 free: 24031 MB
node 19 cpus: 152-159,408-415
node 19 size: 24187 MB
node 19 free: 24028 MB
node 20 cpus: 160-167,416-423
node 20 size: 24187 MB
node 20 free: 24037 MB
node 21 cpus: 168-175,424-431

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_energy_base = 748

SPECspeed®2017_fp_peak = 322

SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 21 size: 24187 MB
node 21 free: 24030 MB
node 22 cpus: 176-183,432-439
node 22 size: 24187 MB
node 22 free: 24038 MB
node 23 cpus: 184-191,440-447
node 23 size: 24187 MB
node 23 free: 24020 MB
node 24 cpus: 192-199,448-455
node 24 size: 24187 MB
node 24 free: 24042 MB
node 25 cpus: 200-207,456-463
node 25 size: 24187 MB
node 25 free: 23958 MB
node 26 cpus: 208-215,464-471
node 26 size: 24187 MB
node 26 free: 24087 MB
node 27 cpus: 216-223,472-479
node 27 size: 23979 MB
node 27 free: 23753 MB
node 28 cpus: 224-231,480-487
node 28 size: 24187 MB
node 28 free: 23917 MB
node 29 cpus: 232-239,488-495
node 29 size: 24187 MB
node 29 free: 24045 MB
node 30 cpus: 240-247,496-503
node 30 size: 24187 MB
node 30 free: 24008 MB
node 31 cpus: 248-255,504-511
node 31 size: 24187 MB
node 31 free: 23989 MB
node distances:

```

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
25	0:	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
26	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
27	1:	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
28	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
29	2:	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
30	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
31	3:	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
33	4:	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
34	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
35	5:	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
36	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
37	6:	11	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
38	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
39	7:	11	11	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
40	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
41	8:	11	11	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
42	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
43	9:	11	11	11	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
44	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
45	10:	11	11	11	11	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11
46	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_energy_base = 748

SPECspeed®2017_fp_peak = 322

SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

11: 11 11 11 11 11 11 11 11 11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
12: 11 11 11 11 11 11 11 11 11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32
32 32 32 32 32 32
13: 11 11 11 11 11 11 11 11 11 11 11 11 10 11 11 11 32 32 32 32 32 32 32 32
32 32 32 32 32 32
14: 11 11 11 11 11 11 11 11 11 11 11 11 11 10 11 11 32 32 32 32 32 32 32 32
32 32 32 32 32 32
15: 11 11 11 11 11 11 11 11 11 11 11 11 11 11 10 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32
16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11 11 11 11 11
11 11 11 11 11 11
17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11 11 11 11 11
11 11 11 11 11 11
18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11 11 11 11 11
11 11 11 11 11 11
19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10 11 11 11 11
11 11 11 11 11 11
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 10 11 11 11
11 11 11 11 11 11
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11 11
11 11 11 11 11 11
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10 11
11 11 11 11 11 11
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10 11
11 11 11 11 11 11
24: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 10
11 11 11 11 11 11
25: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
10 11 11 11 11 11
26: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 10 11 11 11 11
27: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 10 11 11 11
28: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 10 11 11
29: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 10 11
30: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 10 11
31: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 11 10

```

```

-----
9. /proc/meminfo
   MemTotal:      792082580 kB

```

```

-----
10. who -r
    run-level 3  May 18 17:29

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target  Status
    multi-user      running

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR665 V3 (2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base =	292
SPECspeed®2017_fp_energy_base =	748
SPECspeed®2017_fp_peak =	322
SPECspeed®2017_fp_energy_peak =	799

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

12. Services, from `systemctl list-unit-files`

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2
indirect	wickedd

13. Linux kernel boot-time arguments, from `/proc/cmdline`

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=a318787d-19c7-4838-85d1-48f29c075c16
splash=silent
mitigations=auto
quiet
security=apparmor

```

14. `cpupower frequency-info`

```

analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: no
    Active: no

```

15. `tuned-adm active`

```

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

```

16. `sysctl`

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292
SPECspeed®2017_fp_energy_base = 748
SPECspeed®2017_fp_peak = 322
SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400_znver4_A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   446G   59G  387G  14% /
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:         Lenovo
Product:        ThinkSystem SR665 V3 MB,Genoa,Kauai,DDR5,Kauai,2U
Product Family: ThinkSystem
Serial:         1234567890
```

```
-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x SK Hynix HMC88AEBRA115N 32 GB 2 rank 4800
 16x SK Hynix HMC88AEBRA168N 32 GB 2 rank 4800
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     KAE111J-2.10
BIOS Date:        05/11/2023
BIOS Revision:    2.10
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292
SPECspeed®2017_fp_energy_base = 748
SPECspeed®2017_fp_peak = 322
SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Platform Notes (Continued)

Firmware Revision: 2.10

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292
SPECspeed®2017_fp_energy_base = 748
SPECspeed®2017_fp_peak = 322
SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base = 292
SPECSpeed®2017_fp_energy_base = 748
SPECSpeed®2017_fp_peak = 322
SPECSpeed®2017_fp_energy_peak = 799

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlIBM -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlIBM -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlIBM -lamdalloc
-lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECSpeed®2017_fp_base = 292
SPECSpeed®2017_fp_energy_base = 748
SPECSpeed®2017_fp_peak = 322
SPECSpeed®2017_fp_energy_peak = 799

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

`-Wno-return-type -Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:

`clang`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

`638.imagick_s: Same as 619.lbm_s`

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292
SPECspeed®2017_fp_energy_base = 748
SPECspeed®2017_fp_peak = 322
SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

654.roms_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_fp_base = 292
SPECspeed®2017_fp_energy_base = 748
SPECspeed®2017_fp_peak = 322
SPECspeed®2017_fp_energy_peak = 799

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Peak Optimization Flags (Continued)

628.pop2_s (continued):
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Bergamo-S.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Bergamo-S.xml>

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-18 06:24:40-0400.
Report generated on 2023-06-13 15:16:30 by CPU2017 PDF formatter v6716.
Originally published on 2023-06-13.