



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

CPU2017 License: 6488


Test Date: Jun-2023

Test Sponsor: xFusion

Hardware Availability: Apr-2023

Tested by: xFusion

Software Availability: Dec-2022

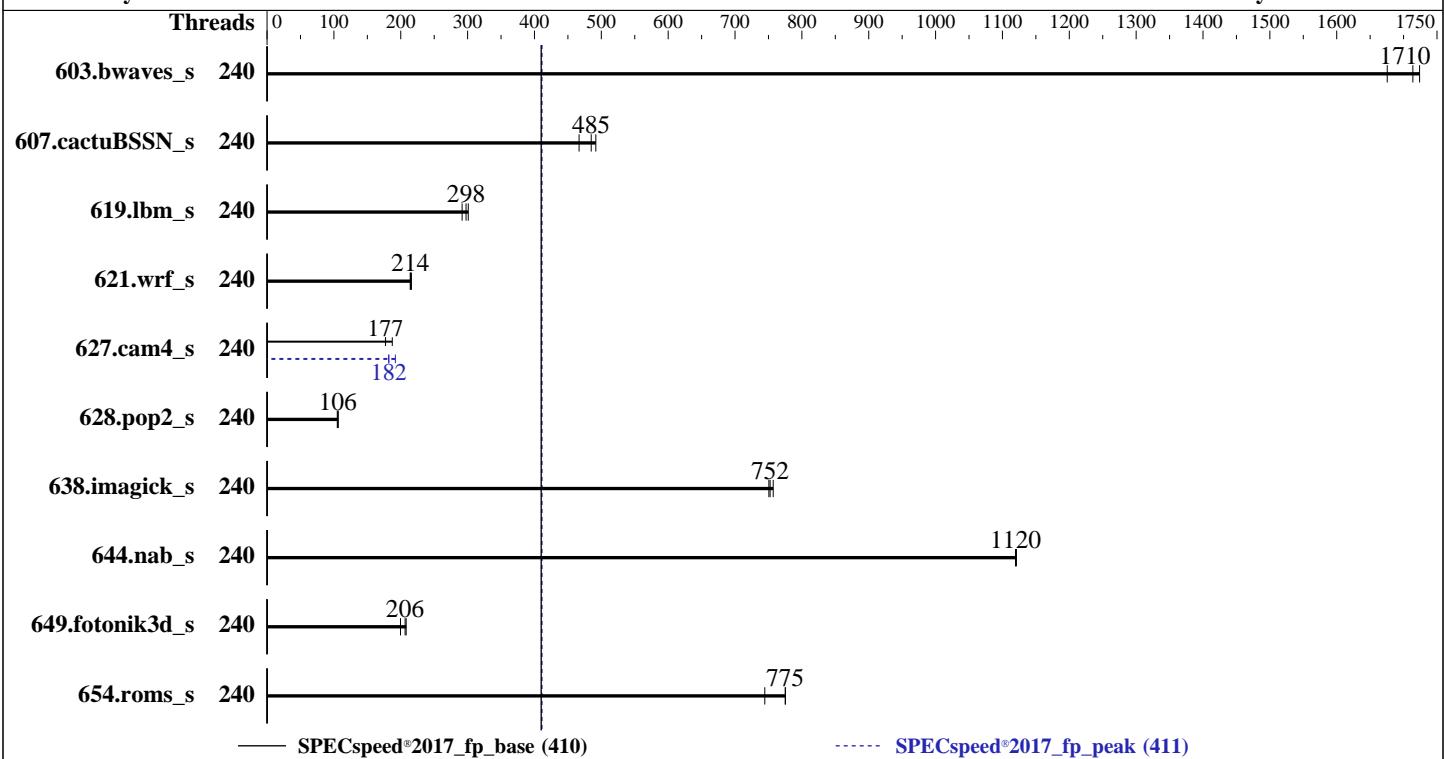

— SPECSpeed®2017_fp_base (410)

----- SPECSpeed®2017_fp_peak (411)

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 Compiler: 5.14.0-70.13.1.el9_0.x86_64
 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 2.00.34 Released Apr-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

CPU2017 License: 6488

Test Date: Jun-2023

Test Sponsor: xFusion

Hardware Availability: Apr-2023

Tested by: xFusion

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds
603.bwaves_s	240	35.2	1680	34.2	1720	34.4	1710		240	35.2	1680	34.2	1720	34.4	1710	
607.cactuBSSN_s	240	34.4	485	33.9	492	35.7	467	240	34.4	485	33.9	492	35.7	467		
619.lbm_s	240	17.4	301	17.6	298	18.0	292	240	17.4	301	17.6	298	18.0	292		
621.wrf_s	240	61.2	216	61.7	214	61.7	214	240	61.2	216	61.7	214	61.7	214		
627.cam4_s	240	50.0	177	47.3	187	50.0	177	240	48.7	182	48.7	182	46.2	192		
628.pop2_s	240	113	105	112	106	112	106	240	113	105	112	106	112	106		
638.imagick_s	240	19.2	752	19.2	751	19.1	757	240	19.2	752	19.2	751	19.1	757		
644.nab_s	240	15.6	1120	15.6	1120	15.6	1120	240	15.6	1120	15.6	1120	15.6	1120		
649.fotonik3d_s	240	43.8	208	45.7	200	44.1	206	240	43.8	208	45.7	200	44.1	206		
654.roms_s	240	21.1	745	20.3	775	20.3	775	240	21.1	745	20.3	775	20.3	775		

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

Test Date: Jun-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes

BIOS configuration:

Performance Profile Set to Load Balance

Enable LP [Global] Set to Single LP

SNC Set to Enable SNC2 (2-clusters)

```
Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Jun  2 16:14:04 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
16:14:04 up 52 min, 1 user, load average: 0.01, 28.19, 88.66
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 15:24 4.00s 0.95s 0.10s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

Test Date: Jun-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
scheduling priority          (-e) 0
file size                   (-blocks, -f) unlimited
pending signals             (-i) 4125117
max locked memory          (-kbytes, -l) 64
max memory size             (-kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (-512 bytes, -p) 8
POSIX message queues        (-bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (-kbytes, -s) unlimited
cpu time                    (-seconds, -t) unlimited
max user processes          (-u) 4125117
virtual memory               (-kbytes, -v) unlimited
file locks                  (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/sh ./run_speed.sh
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240
--tune base,peak -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
cores=240 --tune base,peak --output_format all --define drop_caches --nopower --runmode speed --tune
base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.010/templogs/preenv.fpspeed.010.0.log --lognum 010.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 6
microcode       : 0x2b0001b0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 60
siblings         : 60
4 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
0,362,364,366,368,370,372,374
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 411

CPU2017 License: 6488

Test Date: Jun-2023

Test Sponsor: xFusion

Hardware Availability: Apr-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

```
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
8,490,492,494,496,498,500,502
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 240
On-line CPU(s) list: 0-239
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8490H
BIOS Model name: Intel(R) Xeon(R) Platinum 8490H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 60
Socket(s): 4
Stepping: 6
Frequency boost: enabled
CPU max MHz: 1901.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocndq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxlptrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 11.3 MiB (240 instances)
L1i cache: 7.5 MiB (240 instances)
L2 cache: 480 MiB (240 instances)
L3 cache: 450 MiB (4 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-29
NUMA node1 CPU(s): 30-59
NUMA node2 CPU(s): 60-89
NUMA node3 CPU(s): 90-119
NUMA node4 CPU(s): 120-149
NUMA node5 CPU(s): 150-179
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
NUMA node6 CPU(s):          180-209
NUMA node7 CPU(s):          210-239
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d    48K    11.3M   12 Data       1        64      1           64
  L1i    32K     7.5M    8 Instruction 1        64      1           64
  L2     2M     480M   16 Unified     2      2048      1           64
  L3    112.5M   450M   15 Unified     3    122880      1           64
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-29
node 0 size: 128249 MB
node 0 free: 127112 MB
node 1 cpus: 30-59
node 1 size: 128981 MB
node 1 free: 127173 MB
node 2 cpus: 60-89
node 2 size: 129017 MB
node 2 free: 128565 MB
node 3 cpus: 90-119
node 3 size: 129017 MB
node 3 free: 128554 MB
node 4 cpus: 120-149
node 4 size: 129017 MB
node 4 free: 128538 MB
node 5 cpus: 150-179
node 5 size: 129017 MB
node 5 free: 128546 MB
node 6 cpus: 180-209
node 6 size: 129017 MB
node 6 free: 128529 MB
node 7 cpus: 210-239
node 7 size: 128997 MB
node 7 free: 128552 MB
node distances:
node  0   1   2   3   4   5   6   7
  0: 10 12 21 21 21 21 21 21
  1: 12 10 21 21 21 21 21 21
  2: 21 21 10 12 21 21 21 21
  3: 21 21 12 10 21 21 21 21
  4: 21 21 21 21 10 12 21 21
  5: 21 21 21 21 12 10 21 21
  6: 21 21 21 21 21 21 10 12
  7: 21 21 21 21 21 21 12 10
```

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

Test Date: Jun-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

MemTotal: 1056068000 kB

10. who -r
run-level 3 Jun 2 15:21

11. Systemd service manager version: systemd 250 (250-6.e19_0)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited crond
dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update
nftables rdisc rhsm-facts rpmbuild rebuild serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-psstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.e19_0.x86_64
root=UUID=058bfd1-c62b-4fad-8d41-5c40aa179007
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b47f1685-a5fa-4d39-b2d7-e3f6e95ad499
nohz_full=1-479

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 1.90 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 411

CPU2017 License: 6488

Test Date: Jun-2023

Test Sponsor: xFusion

Hardware Availability: Apr-2023

Tested by: xFusion

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.dirty_ratio          40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

-----
18. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
20. OS release
    From /etc/*-release /etc/*-version
    os-release   Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
    system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----
21. Disk information
    SPEC is set to: /home/Uniautos/cpu2017
    Filesystem  Type  Size  Used  Avail Use% Mounted on
    /dev/sda5    xfs   820G  25G  796G  3%  /home

-----
22. /sys/devices/virtual/dmi/id
    Product:      5885H V7
    Product Family: EagleStream

-----
23. dmidecode
    Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

-----
24. BIOS
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

Test Date: Jun-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Byosoft Corporation
BIOS Version: 2.00.34
BIOS Date: 04/18/2023

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 607.cactubssn_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran, C    | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 411

CPU2017 License: 6488

Test Date: Jun-2023

Test Sponsor: xFusion

Hardware Availability: Apr-2023

Tested by: xFusion

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubssn_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

Test Date: Jun-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 411

CPU2017 License: 6488

Test Date: Jun-2023

Test Sponsor: xFusion

Hardware Availability: Apr-2023

Tested by: xFusion

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-02 04:14:03-0400.

Report generated on 2023-06-20 23:22:29 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-20.