



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

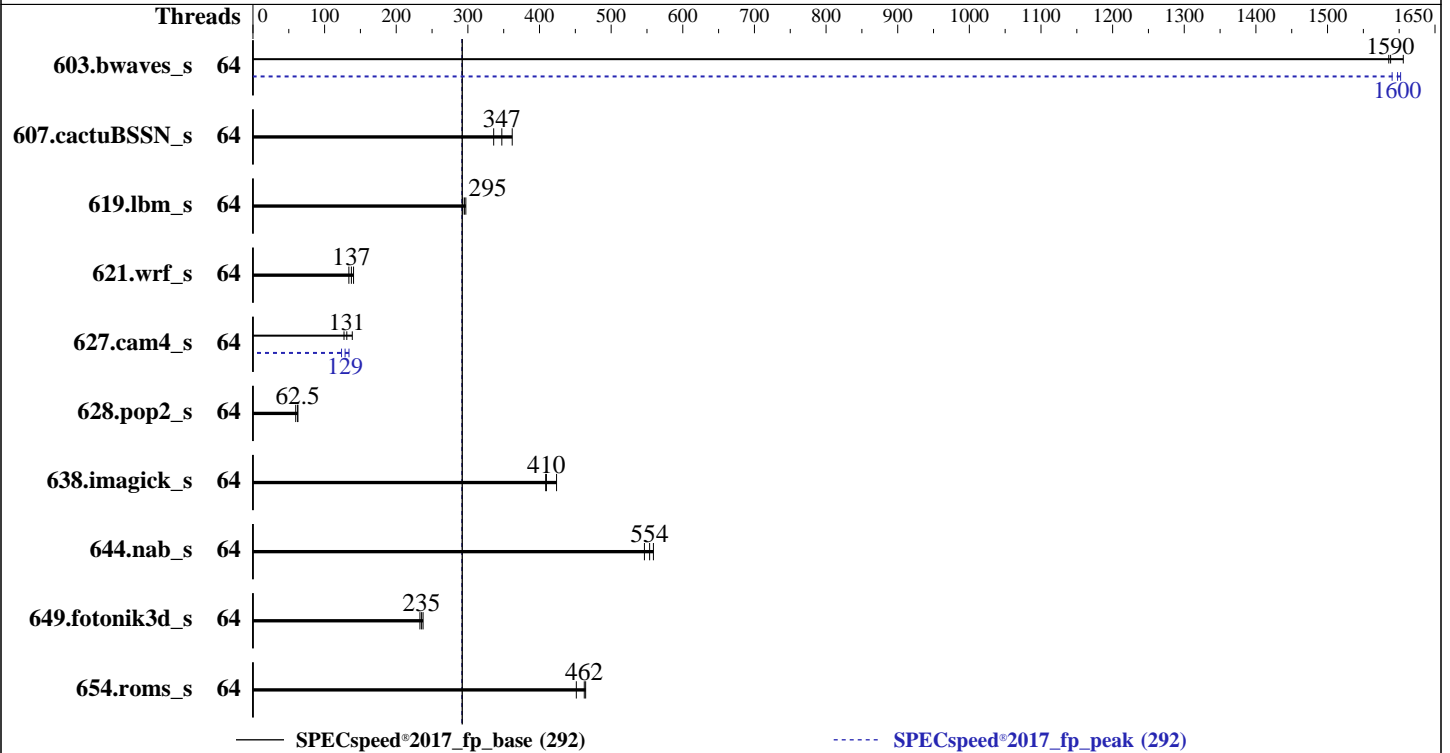

Hardware

CPU Name: Intel Xeon Max 9462
 Max MHz: 3500
 Nominal: 2700
 Enabled: 64 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 75 MB I+D on chip per chip
 Other: None
 Memory: 640 GB (16 x 32 GB 2Rx8 PC5-4800B-R + 2 x 64 GB HBM)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise release Linux 9.0 (Plow)
 Kernel 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: HPE BIOS Version v1.34 04/13/2023 released Apr-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECSpeed®2017_fp_base = 292

SPECSpeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	<u>37.2</u>	<u>1590</u>	36.7	1610	37.2	1590	64	<u>36.9</u>	<u>1600</u>	37.1	1590	36.8	1600
607.cactuBSSN_s	64	<u>48.0</u>	<u>347</u>	49.6	336	46.1	362	64	<u>48.0</u>	<u>347</u>	49.6	336	46.1	362
619.lbm_s	64	17.6	297	17.9	293	<u>17.7</u>	<u>295</u>	64	17.6	297	17.9	293	<u>17.7</u>	<u>295</u>
621.wrf_s	64	94.2	140	98.8	134	<u>96.3</u>	<u>137</u>	64	94.2	140	98.8	134	<u>96.3</u>	<u>137</u>
627.cam4_s	64	<u>67.7</u>	<u>131</u>	69.7	127	63.9	139	64	<u>68.9</u>	<u>129</u>	71.7	124	66.1	134
628.pop2_s	64	199	59.7	<u>190</u>	<u>62.5</u>	190	62.6	64	199	59.7	<u>190</u>	<u>62.5</u>	190	62.6
638.imagick_s	64	35.3	409	<u>35.2</u>	<u>410</u>	34.0	424	64	35.3	409	<u>35.2</u>	<u>410</u>	34.0	424
644.nab_s	64	32.0	546	31.3	559	<u>31.6</u>	<u>554</u>	64	32.0	546	31.3	559	<u>31.6</u>	<u>554</u>
649.fotonik3d_s	64	<u>38.7</u>	<u>235</u>	39.1	233	38.4	237	64	<u>38.7</u>	<u>235</u>	39.1	233	38.4	237
654.roms_s	64	33.9	464	<u>34.0</u>	<u>462</u>	34.9	451	64	33.9	464	<u>34.0</u>	<u>462</u>	34.9	451

SPECSpeed®2017_fp_base = 292

SPECSpeed®2017_fp_peak = 292

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b0004a1 for the Intel Xeon Max 9462 processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute
Thermal Configuration set to Maximum Cooling
Intel Hyper-Threading set to Disabled
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Enhanced Processor Performance Profile set to Aggressive
Dead Block Predictor set to Enabled
Workload Profile set to Custom
Adjacent Sector Prefetch set to Disabled
Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon May 29 17:50:35 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

x86_64 x86_64 GNU/Linux

```
-----
2. w
  17:50:35 up 3:51, 1 user, load average: 0.00, 0.81, 1.89
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      pts/0    14:00   3:48m  0.92s  0.00s -bash
```

```
-----
3. Username
  From environment variable $USER:  root
```

```
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2062833
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 2062833
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 27
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define
  drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.008/templogs/preenv.fpspeed.008.0.log --lognum 008.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel (R) Xeon (R) CPU Max 9462
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2c0001d1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappgs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

cpu cores      : 32
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) CPU Max 9462
BIOS Model name:      Intel(R) Xeon(R) CPU Max 9462
CPU family:            6
Model:                 143
Thread(s) per core:   1
Core(s) per socket:   32
Socket(s):             2
Stepping:              8
BogoMIPS:              5400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                      invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                      vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                      erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                      clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                      xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                      split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                      avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                      avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                      cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                      arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              150 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-15,32-47
NUMA node1 CPU(s):    16-31,48-63

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	75M	150M	15	Unified	3	81920	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 257717 MB
node 0 free: 257040 MB
node 1 cpus: 16-31,48-63
node 1 size: 258030 MB
node 1 free: 250404 MB
node distances:
node  0  1
 0:  10  26
 1:  26  10

```

9. /proc/meminfo

MemTotal: 528125796 kB

10. who -r

run-level 3 May 29 13:59

11. Systemd service manager version: systemd 250 (250-6.el9_0)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower debug-shell

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm
rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysext
indirect          sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000
```

20. OS release

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

21. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   372G  104G  269G  28% /home
```

22. /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:     ProLiant DL380 Gen11
Product Family: ProLiant
Serial:      CNX21000G8
```

23. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
1x Hynix HMC88AEBRA168N 32 GB 2 rank 4800
15x Hynix HMC88MEBRA113N 32 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      HPE
BIOS Version:     1.34
BIOS Date:        04/13/2023
BIOS Revision:    1.34
Firmware Revision: 1.10
```

Compiler Version Notes

```
=====  
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.70 GHz, Intel Xeon Max 9462)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 292

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-29 08:20:34-0400.

Report generated on 2023-06-20 23:24:35 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-20.