



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

CPU2017 License: 9019


Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

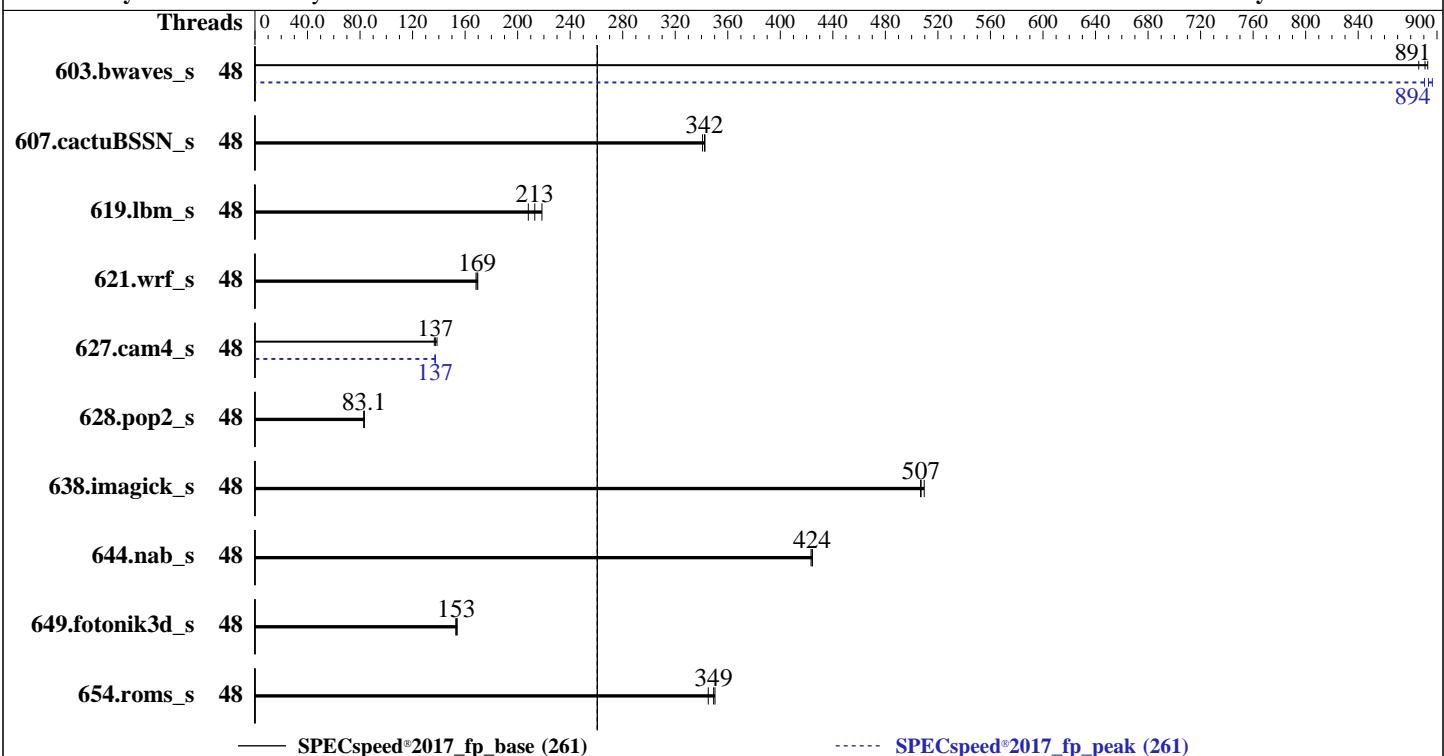

| Hardware | | Software | |
|-----------------|---|--|---|
| CPU Name: | Intel Xeon Gold 5418Y | OS: | SUSE Linux Enterprise Server 15 SP4 |
| Max MHz: | 3800 | Compiler: | 5.14.21-150400.22-default |
| Nominal: | 2000 | Parallel: | C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; |
| Enabled: | 48 cores, 2 chips | Firmware: | Fortran: Version 2023.0 of Intel Fortran Compiler for Linux; |
| Orderable: | 1,2 Chips | File System: | Yes |
| Cache L1: | 32 KB I + 48 KB D on chip per core | System State: | Version 5.1.1b released Mar-2023 |
| L2: | 2 MB I+D on chip per core | Base Pointers: | xfs |
| L3: | 45 MB I+D on chip per chip | Peak Pointers: | Run level 3 (multi-user) |
| Other: | None | Other: | 64-bit |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400) | Power Management: | 64-bit |
| Storage: | 1 x 960 GB M.2 SSD SATA | jemalloc memory allocator V5.0.1 | |
| Other: | None | BIOS set to prefer performance at the cost of additional power usage | |



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|-------------|-------------|-------------|------------|-------------|------------|---------|-------------|-------------|-------------|------------|-------------|------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 48 | 66.2 | 891 | 66.1 | 893 | 66.6 | 886 | 48 | 66.3 | 890 | 66.0 | 894 | 65.8 | 896 |
| 607.cactuBSSN_s | 48 | 48.9 | 341 | 48.7 | 343 | 48.7 | 342 | 48 | 48.9 | 341 | 48.7 | 343 | 48.7 | 342 |
| 619.lbm_s | 48 | 24.6 | 213 | 25.2 | 208 | 24.0 | 219 | 48 | 24.6 | 213 | 25.2 | 208 | 24.0 | 219 |
| 621.wrf_s | 48 | 78.0 | 170 | 78.2 | 169 | 78.6 | 168 | 48 | 78.0 | 170 | 78.2 | 169 | 78.6 | 168 |
| 627.cam4_s | 48 | 64.5 | 137 | 64.9 | 137 | 63.9 | 139 | 48 | 64.5 | 137 | 64.7 | 137 | 64.6 | 137 |
| 628.pop2_s | 48 | 143 | 83.1 | 143 | 82.9 | 143 | 83.2 | 48 | 143 | 83.1 | 143 | 82.9 | 143 | 83.2 |
| 638.imagick_s | 48 | 28.5 | 507 | 28.3 | 510 | 28.4 | 507 | 48 | 28.5 | 507 | 28.3 | 510 | 28.4 | 507 |
| 644.nab_s | 48 | 41.2 | 424 | 41.2 | 424 | 41.3 | 423 | 48 | 41.2 | 424 | 41.2 | 424 | 41.3 | 423 |
| 649.fotonik3d_s | 48 | 59.2 | 154 | 59.4 | 153 | 59.6 | 153 | 48 | 59.2 | 154 | 59.4 | 153 | 59.6 | 153 |
| 654.roms_s | 48 | 45.0 | 350 | 45.1 | 349 | 45.6 | 345 | 48 | 45.0 | 350 | 45.1 | 349 | 45.6 | 345 |

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes

BIOS Settings:
Intel Hyper-Threading Technology set to Disabled
Sub NUMA Clustering set to Disabled
LLC Dead Line set to Disabled
ADDC Sparing set to Disabled
Processor C6 Report set to Enabled
UPI Link Enablement 1
UPI Power Management Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Jun  3 07:54:55 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
07:54:55 up 1:07, 1 user, load average: 35.31, 42.60, 43.57
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 06:47 1:04m 0.92s 0.07s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 4125426
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4125426
virtual memory            (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=48  
--tune all -o all --define drop_caches fpspeed  
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define  
cores=48 --tune all --output_format all --define drop_caches --nopower --runmode speed --tune base:peak  
--size refspeed fpspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.035/templogs/preenv.fpspeed.035.0.log --lognum 035.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) Gold 5418Y
vendor_id        : GenuineIntel
cpu family       : 6
model           : 143
stepping         : 8
microcode        : 0x2b000190
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores        : 24
siblings         : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECspeed®2017_fp_base = 261

SPECspeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```

Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 5418Y
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 2
Stepping: 8
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
       tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
       avx2 smep bmi2 erms invpcid rtm cqmm rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsavec xgetbv1 xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total
       cqmm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
       arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
       ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
       tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
       enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
       amx_tile flush_lll arch_capabilities
Virtualization: VT-x
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 96 MiB (48 instances)
L3 cache: 90 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-23
NUMA node1 CPU(s): 24-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 48K | 2.3M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 1.5M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 96M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 45M | 90M | 15 | Unified | 3 | 49152 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
available: 2 nodes (0-1)
node 0 cpus: 0-23
node 0 size: 515668 MB
node 0 free: 513023 MB
node 1 cpus: 24-47
node 1 size: 515711 MB
node 1 free: 514674 MB
node distances:
node    0    1
  0: 10 21
  1: 21 10

-----
9. /proc/meminfo
MemTotal:      1056133364 kB

-----
10. who -r
run-level 3 Jun 3 06:47

-----
11. Systemd service manager version: systemd 249 (249.11+use.124.g2bc0b2c447)
Default Target      Status
multi-user          running

-----
12. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                  irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nsqd postfix
                  purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                  wickedd-dhcp6 wickedd-nanny
enabled-runtime   systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load
                  lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
                  serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect          wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=2e322596-48f4-44a0-8090-3822dcae83ac
splash=silent
resume=/dev/disk/by-uuid/f130aef7-db88-4514-8959-00b71df7d2cd
mitigations=auto
quiet
security=apparmor
crashkernel=324M,high
crashkernel=72M,low

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
    The governor "performance" may decide which speed to use
    within this range.
boost state support:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

Supported: yes

Active: yes

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space      2  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs    3000  
vm.dirty_ratio                40  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy     0  
vm.nr_overcommit_hugepages   0  
vm.swappiness                  60  
vm.watermark_boost_factor     15000  
vm.watermark_scale_factor     10  
vm.zone_reclaim_mode          0  
  
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           [always] defer defer+madvise madvise never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force  
  
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs        60000  
defrag                      1  
max_ptes_none                511  
max_ptes_shared              256  
max_ptes_swap                64  
pages_to_scan                4096  
scan_sleep_millisecs         10000  
  
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP4  
  
-----  
19. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdb3        xfs   351G  6.7G  344G   2% /home  
  
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:          Cisco Systems Inc  
Product:         UCSX-210C-M7  
Serial:          FCH270978GR
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
4x 0xAD00 HMCG94MEBRA109N 64 GB 2 rank 4800, configured at 4400
12x 0xAD00 HMCG94MEBRA121N 64 GB 2 rank 4800, configured at 4400
```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: Cisco Systems, Inc.
BIOS Version: X210M7.5.1.1b.0.0308231534
BIOS Date: 03/08/2023
BIOS Revision: 5.29
```

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 607.cactusBSSN_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----

=====
Fortran, C    | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECspeed®2017_fp_base = 261

SPECspeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Base Compiler Invocation

C benchmarks:

`icx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

`-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Fortran benchmarks:

`-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Benchmarks using both Fortran and C:

`-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math`

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y,
2.00GHz)

SPECspeed®2017_fp_base = 261

SPECspeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 5418Y, 2.00GHz)

SPECSpeed®2017_fp_base = 261

SPECSpeed®2017_fp_peak = 261

CPU2017 License: 9019

Test Date: Jun-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids  
-Ofast -ffast-math -futo -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futo -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revH.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-03 10:54:54-0400.

Report generated on 2023-06-20 23:26:38 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-20.