



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416


Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

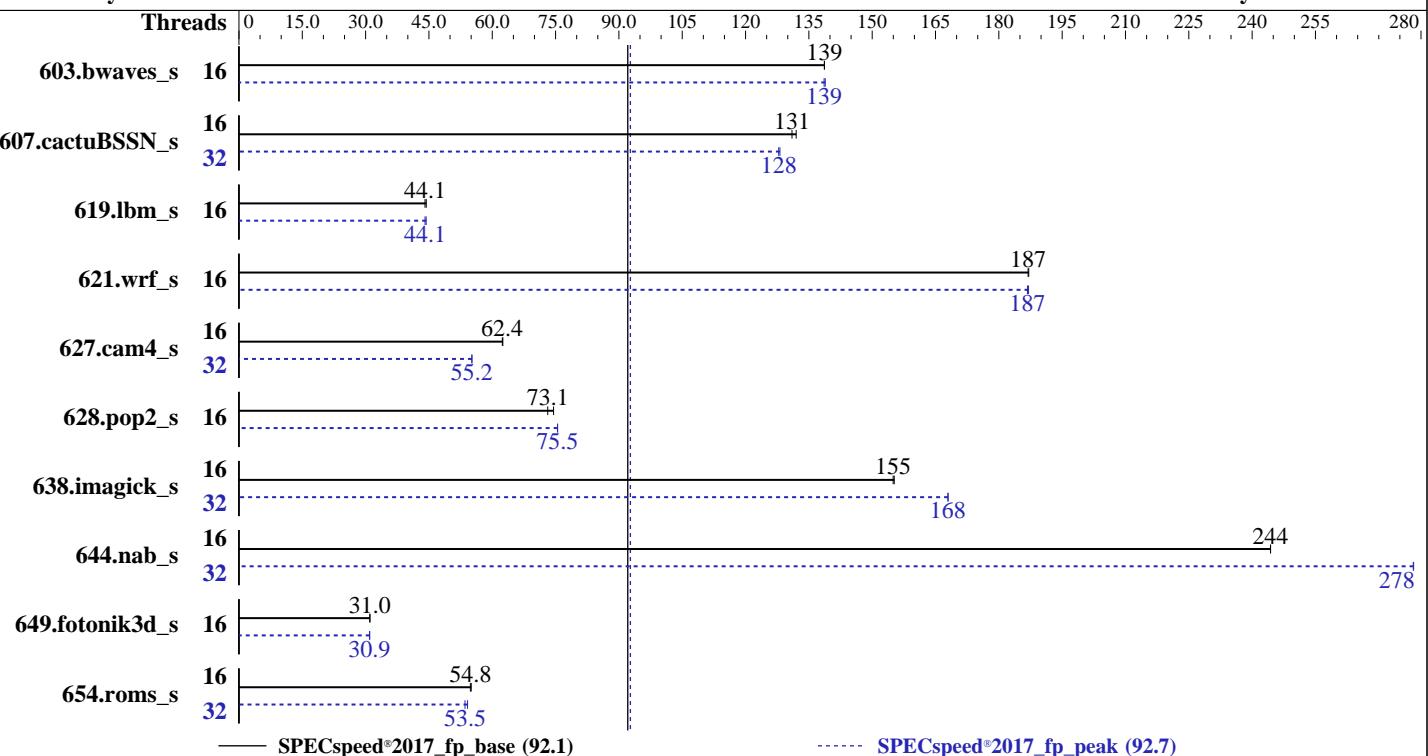

— SPECSpeed®2017_fp_base (92.1)

----- SPECSpeed®2017_fp_peak (92.7)

Hardware

CPU Name: AMD Ryzen 9 7950X
 Max MHz: 5700
 Nominal: 4500
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx4 PC5-5600B-R , running at 5200)
 Storage: Samsung 970 EVO 500 GB NVMe M.2
 Other: None

Software

OS: Ubuntu 22.04 LTS
 Compiler: kernel version 5.19.0-43-generic
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
 Firmware: Yes
 File System: BIOS version L2.03 released Jan-2023
 System State: ext4
 Base Pointers: Run level 5 (graphical multi-user)
 Peak Pointers: 64-bit
 Other: 64-bit
 Power Management: None
 Power Management: Default



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	425	139	425	139			16	426	139	425	139				
607.cactuBSSN_s	16	127	131	126	132			32	130	128	130	128				
619.lbm_s	16	119	44.1	118	44.4			16	119	44.1	118	44.3				
621.wrf_s	16	70.7	187	70.8	187			16	70.7	187	70.8	187				
627.cam4_s	16	142	62.5	142	62.4			32	161	55.2	161	55.2				
628.pop2_s	16	159	74.5	162	73.1			16	157	75.5	157	75.5				
638.imagick_s	16	93.1	155	92.9	155			32	85.9	168	85.9	168				
644.nab_s	16	71.5	244	71.5	244			32	62.8	278	62.8	278				
649.fotonik3d_s	16	294	31.0	294	31.0			16	295	30.9	294	31.0				
654.roms_s	16	286	55.0	287	54.8			32	294	53.5	291	54.1				
SPECSpeed®2017_fp_base =				92.1												
SPECSpeed®2017_fp_peak =				92.7												

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECspeed®2017_fp_base = 92.1

SPECspeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Operating System Notes (Continued)

run as root.

To disable THP for peak runs of 621.wrf_s:

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

To enable THP only on request for peak runs of 654.roms_s:

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"  
LD_LIBRARY_PATH = "/speccpu2017/speed/amd_speed_aocc400_genoa_B_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:

```
GOMP_CPU_AFFINITY = "0-15"
```

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-15"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-15"
```

Environment variables set by runcpu during the 627.cam4_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-15"
```

Environment variables set by runcpu during the 638.imagick_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY = "0-15"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0 16 1 17 2 18 3 19 4 20 5 21 6 22 7 23 8 24 9 25 10 26 11 27 12 28 13 29 14 30 15 31"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECspeed®2017_fp_base = 92.1

SPECspeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings :
Precision Boost Overdrive : Enabled
IOMMU : Disabled
Core Performance Boost : Enabled
Global C-state Control : Disabled
Memory interleaving : Enabled

Sysinfo program /speccpu2017/speed/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on asrr-1U4LW-B650-2L2T-RPSU Tue Jun 6 16:29:08 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux asrr-1U4LW-B650-2L2T-RPSU 5.19.0-43-generic #44~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Mon May 22
13:39:36 UTC 2 x86_64 x86_64 x86_64 GNU/Linux

2. w
16:29:08 up 1:43, 2 users, load average: 7.17, 5.70, 3.51
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
asrr :0 :0 14:46 ?xdm? 56.38s 0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Platform Notes (Continued)

```
asrr      pts/1      -          14:48    1:40m  0.73s  0.01s sudo ./run_amd_speed_aocc400_genoa_B1.py
```

3. Username

```
From environment variable $USER:  root
From the command 'logname':      asrr
```

4. ulimit -a

```
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)        unlimited
stack(kbytes)       unlimited
coredump(blocks)    0
memory(kbytes)      unlimited
locked memory(kbytes) 2097152
process            253632
nofiles             1024
vmemory(kbytes)     unlimited
locks               unlimited
rtprio              0
```

5. sysinfo process ancestry

```
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./run_amd_speed_aocc400_genoa_B1.py
sudo ./run_amd_speed_aocc400_genoa_B1.py
python3 ./run_amd_speed_aocc400_genoa_B1.py
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 1 fpspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune all --reportable --iterations 1 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /speccpu2017/speed
```

6. /proc/cpuinfo

```
model name      : AMD Ryzen 9 7950X 16-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 97
stepping        : 2
microcode       : 0xa601203
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores      : 16
siblings        : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Platform Notes (Continued)

From lscpu from util-linux 2.37.2:

```

Architecture:                                x86_64
CPU op-mode(s):                            32-bit, 64-bit
Address sizes:                             48 bits physical, 48 bits virtual
Byte Order:                                Little Endian
CPU(s):                                     32
On-line CPU(s) list:                      0-31
Vendor ID:                                 AuthenticAMD
Model name:                               AMD Ryzen 9 7950X 16-Core Processor
CPU family:                                25
Model:                                      97
Thread(s) per core:                      2
Core(s) per socket:                      16
Socket(s):                                 1
Stepping:                                  2
Frequency boost:                          enabled
CPU max MHz:                             5879.8818
CPU min MHz:                             3000.0000
BogoMIPS:                                  8999.59
Flags:                                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                         clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                         constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
                                         pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes
                                         xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                                         misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
                                         perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba
                                         perfmon_v2 ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smp bmi2 erms
                                         invpcid cqmq rdta avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                         clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavexc xgetbv1 xsaves
                                         cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero
                                         irperf xsaveerptr rdpru wbnoinvd cpc arat npt lbrv svm_lock nrip_save
                                         tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
                                         avic v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi umip pkru ospke
                                         avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                         avx512_vpopcntdq rdpid overflow_recov succor smca fsrm flush_lid
Virtualization:                           AMD-V
L1d cache:                                512 KiB (16 instances)
L1i cache:                                512 KiB (16 instances)
L2 cache:                                16 MiB (16 instances)
L3 cache:                                64 MiB (2 instances)
NUMA node(s):                            1
NUMA node0 CPU(s):                      0-31
Vulnerability Itlb multihit:           Not affected
Vulnerability Llft:                     Not affected
Vulnerability Mds:                      Not affected
Vulnerability Meltdown:                Not affected
Vulnerability Mmio stale data:        Not affected
Vulnerability Retbleed:                Not affected
Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:              Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                         filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:                  Not affected
Vulnerability Tsx async abort:       Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	512K	8	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECspeed®2017_fp_base = 92.1

SPECspeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Platform Notes (Continued)

L2	1M	16M	8	Unified	2	2048	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 63485 MB
node 0 free: 61374 MB
node distances:
node 0
0: 10

9. /proc/meminfo

MemTotal: 65009468 kB

10. who -r
run-level 5 Jun 6 14:47

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)

Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* fwupd-refresh.service	loaded	failed	failed	Refresh fwupd metadata and update motd
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd
generated	systemd-boot-check-no-failures systemd-network-generator systemd-networkd
indirect	systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync upower
masked	wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
	apport openipmi speech-dispatcher
	saned@ spice-vdagentd uidd
	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
	sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-5.19.0-43-generic
root=UUID=690a6797-4d9b-40f1-b6da-cfd371352ad4
ro
quiet

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Platform Notes (Continued)

```
splash
vt.handoff=7

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs        60000
defrag                      1
max_ptes_none                511
max_ptes_shared               256
max_ptes_swap                 64
pages_to_scan                 4096
scan_sleep_millisecs         10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04 LTS

-----
19. Disk information
SPEC is set to: /speccpu2017/speed
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2  ext4  457G  36G  398G  9%  /

-----
20. /sys/devices/virtual/dmi/id
Vendor:          ASRockRack
Product:         1U4LW-B650/2L2T RPSU
Serial:          DCS0R8000088
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x SK Hynix HMCG88AGBVA081N 32 GB 2 rank 5600, configured at 5200
2x Unknown Unknown

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 2.03
BIOS Date: 01/30/2023
BIOS Revision: 5.26

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
Fortran, C    | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECspeed®2017_fp_base = 92.1

SPECspeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -floop -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIB -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

Peak Optimization Flags (Continued)

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Peak Optimization Flags (Continued)

627.cam4_s (continued):

```
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdaloc
-lflang
```

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

ASRock Rack Inc.

1U4LW-B650/2L2T RPSU
AMD Ryzen 9 7950X

SPECSpeed®2017_fp_base = 92.1

SPECSpeed®2017_fp_peak = 92.7

CPU2017 License: 5416

Test Date: Jun-2023

Test Sponsor: ASRock Rack Inc.

Hardware Availability: Jan-2023

Tested by: ASRock Rack Inc.

Software Availability: Jan-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_speed_aocc400_genoa_B.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_speed_aocc400_genoa_B.xml

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-06 04:29:08-0400.

Report generated on 2023-07-13 16:23:06 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-13.