



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

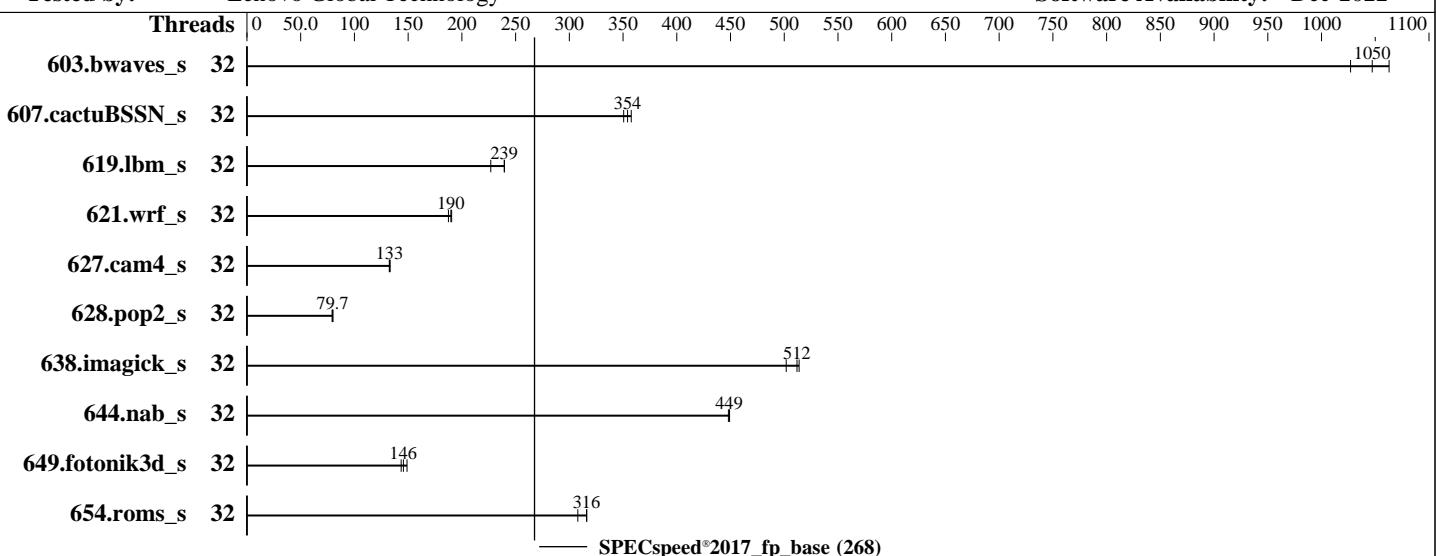

### Hardware

CPU Name: Intel Xeon Gold 6434H  
Max MHz: 4100  
Nominal: 3700  
Enabled: 32 cores, 4 chips  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 22.5 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)  
Storage: 1 x 480 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
Compiler: Kernel 5.14.21-150400.22-default  
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: Lenovo BIOS Version RSE105E 1.10 released May-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	32	55.5	1060	<b>56.3</b>	<u>1050</u>	57.4	1030							
607.cactuBSSN_s	32	47.6	351	46.6	358	<b>47.1</b>	<u>354</u>							
619.lbm_s	32	21.9	240	23.1	227	<b>21.9</b>	<u>239</u>							
621.wrf_s	32	70.5	187	<b>69.7</b>	<u>190</u>	69.4	190							
627.cam4_s	32	<b>66.8</b>	<u>133</u>	66.9	132	66.5	133							
628.pop2_s	32	150	79.2	148	80.0	<b>149</b>	<u>79.7</u>							
638.imagick_s	32	28.7	502	28.1	514	<b>28.2</b>	<u>512</u>							
644.nab_s	32	<b>38.9</b>	<u>449</u>	38.9	449	39.0	448							
649.fotonik3d_s	32	<b>62.6</b>	<u>146</u>	63.5	144	61.2	149							
654.roms_s	32	<b>49.8</b>	<u>316</u>	49.8	316	51.1	308							

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

Hyper-Threading set to Disabled  
Adjacent Cache Prefetch set to Disabled  
AMP Prefetch set to Enable  
C-State set to Legacy  
DCU Streamer Prefetcher set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Aug 24 17:07:39 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
17:07:39 up 1 min, 1 user, load average: 0.90, 0.58, 0.23  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 - 17:06 11.00s 0.74s 0.00s -bash

-----

3. Username  
From environment variable \$USER: root

-----

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

```
pending signals          (-i) 4127064
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4127064
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----  
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base --output_format all --define
  drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
  --logfile $SPEC/Tmp/CPU2017.100/templogs/preenv.fpspeed.100.0.log --lognum 100.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu/cpu2017-1.1.9-ic2023.0
```

```
-----  
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6434H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b0001b0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 8
siblings        : 8
4 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 2: core ids 0-7
physical id 3: core ids 0-7
physical id 0: apicids 0,2,4,6,8,10,12,14
physical id 1: apicids 128,130,132,134,136,138,140,142
physical id 2: apicids 256,258,260,262,264,266,268,270
physical id 3: apicids 384,386,388,390,392,394,396,398
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

```

Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 6434H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 4
Stepping: 8
BogoMIPS: 7400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm nonstop_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
       nonstop_tsc cpuid aperf fmperf tsc_known_freq pni pclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
       tpr_shadow vnni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
       avx2 smep bmi2 erts invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsaves cqm_llc cqm_occup_llc cqm_mbm_total
       cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
       arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
       vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
       bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
       tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
       VT-x
Virtualization: VT-x
L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 64 MiB (32 instances)
L3 cache: 90 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation: usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation: Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	22.5M	90M	15	Unified	3	24576	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

```
node 0 cpus: 0-7
node 0 size: 257707 MB
node 0 free: 256960 MB
node 1 cpus: 8-15
node 1 size: 258011 MB
node 1 free: 257640 MB
node 2 cpus: 16-23
node 2 size: 258045 MB
node 2 free: 257724 MB
node 3 cpus: 24-31
node 3 size: 258025 MB
node 3 free: 257567 MB
node distances:
node    0    1    2    3
 0:   10   21   21   21
 1:   21   10   21   21
 2:   21   21   10   21
 3:   21   21   21   10
```

---

```
9. /proc/meminfo
MemTotal:      1056552868 kB
```

---

```
10. who -r
run-level 3 Aug 24 17:06
```

---

```
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target  Status
multi-user      running
```

---

```
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
                issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog
                smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyield-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load
                lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect        wickedd
```

---

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=07b494b8-a782-4eba-84f2-ef5cae789da8
splash=silent
mitigations=auto
quiet
security=apparmor
```

---

```
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

```
boost state support:  
Supported: yes  
Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space      2  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes     0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                0  
vm.dirty_expire_centisecs    3000  
vm.dirty_ratio                20  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages               0  
vm.nr_hugepages_mempolicy     0  
vm.nr_overcommit_hugepages   0  
vm.swappiness                 60  
vm.watermark_boost_factor    15000  
vm.watermark_scale_factor     10  
vm.zone_reclaim_mode          0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled   always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag                  1  
max_ptes_none            511  
max_ptes_shared           256  
max_ptes_swap              64  
pages_to_scan             4096  
scan_sleep_millisecs     10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
19. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0  
Filesystem  Type  Size  Used Avail Use% Mounted on  
/dev/sda3    xfs   445G  12G  433G  3% /
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:        Lenovo  
Product:       ThinkSystem SR860 V3  
Product Family: ThinkSystem  
Serial:        None
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Platform Notes (Continued)

### 21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

19x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800  
6x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800  
4x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800  
3x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: RSE105E-1.10  
BIOS Date: 05/12/2023  
BIOS Revision: 1.10  
Firmware Revision: 1.10

## Compiler Version Notes

=====

C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 607.cactusBSSN\_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V3  
(3.70 GHz, Intel Xeon Gold 6434H)

SPECspeed®2017\_fp\_base = 268

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-X.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-X.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-24 05:07:38-0400.

Report generated on 2023-09-13 14:52:52 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.