



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

**SPECSpeed®2017\_fp\_base = 476**

**SPECSpeed®2017\_fp\_peak = 495**

CPU2017 License: 9016


**Test Date:** Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

**Hardware Availability:** Jun-2023

Tested by: ASUSTeK Computer Inc.

**Software Availability:** Nov-2022

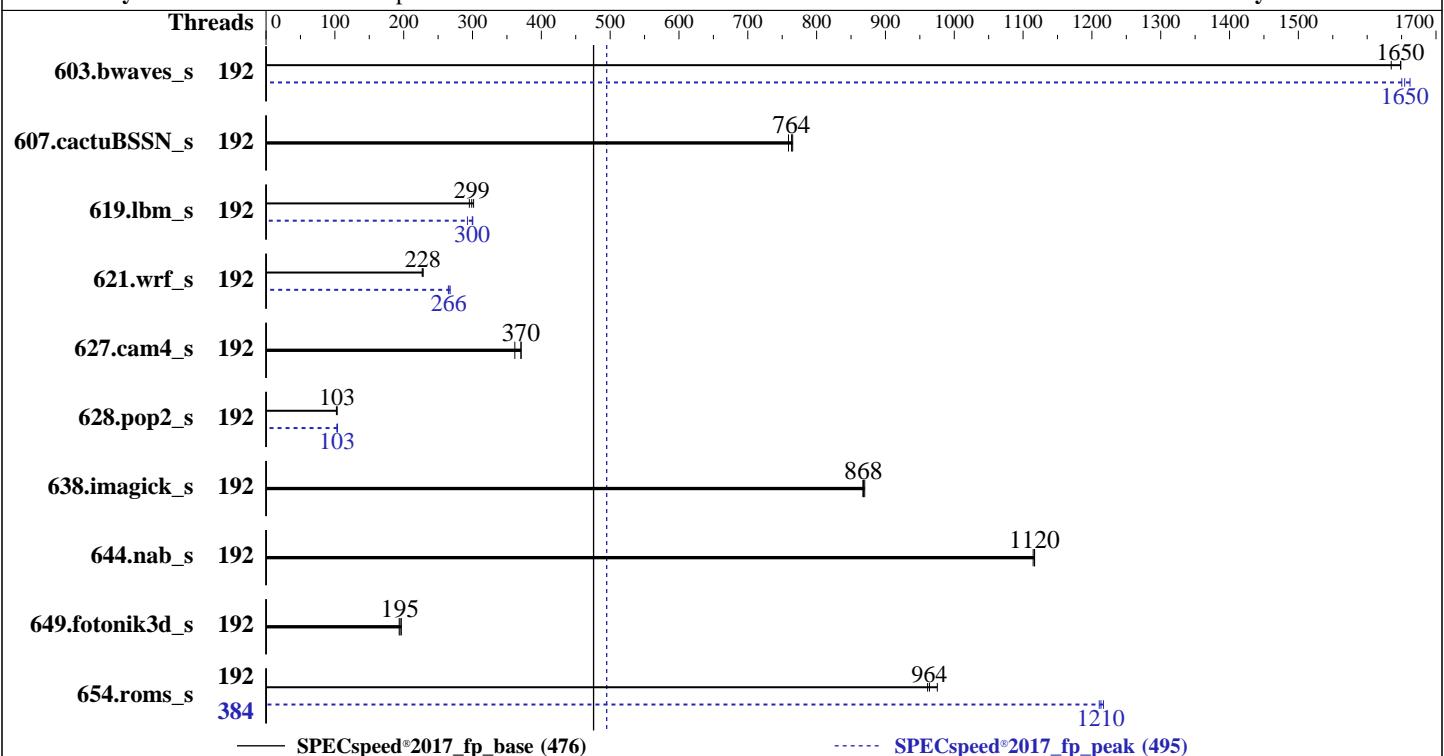

### Hardware

CPU Name: AMD EPYC 9684X  
Max MHz: 3700  
Nominal: 2550  
Enabled: 192 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 1152 MB I+D on chip per chip,  
96 MB shared / 8 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 4.0 TB PCIe NVMe SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
Kernel 5.14.21-150400.22-default  
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
Parallel: Yes  
Firmware: Version 0902 released Apr-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance  
at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

**SPECspeed®2017\_fp\_base = 476**

**SPECspeed®2017\_fp\_peak = 495**

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	
603.bwaves_s	192	<b>35.8</b>	<b>1650</b>	36.1	1630	35.8	1650		192	35.5	1660	<b>35.7</b>	<b>1650</b>	35.8	1650	
607.cactuBSSN_s	192	22.0	759	21.8	765	<b>21.8</b>	<b>764</b>		192	22.0	759	21.8	765	<b>21.8</b>	<b>764</b>	
619.lbm_s	192	<b>17.5</b>	<b>299</b>	17.4	302	17.7	295		192	<b>17.9</b>	293	17.4	300	<b>17.5</b>	<b>300</b>	
621.wrf_s	192	58.0	228	58.3	227	<b>58.0</b>	<b>228</b>		192	49.9	265	<b>49.8</b>	<b>266</b>	49.4	268	
627.cam4_s	192	24.5	361	23.9	371	<b>23.9</b>	<b>370</b>		192	24.5	361	23.9	371	<b>23.9</b>	<b>370</b>	
628.pop2_s	192	<b>115</b>	<b>103</b>	115	103	116	102		192	<b>115</b>	<b>103</b>	115	103	114	104	
638.imagick_s	192	<b>16.6</b>	<b>868</b>	16.6	870	16.6	867		192	<b>16.6</b>	<b>868</b>	16.6	870	16.6	867	
644.nab_s	192	15.6	1120	<b>15.6</b>	<b>1120</b>	15.7	1110		192	15.6	1120	<b>15.6</b>	<b>1120</b>	15.7	1110	
649.fotonik3d_s	192	47.1	193	<b>46.8</b>	<b>195</b>	46.4	197		192	47.1	193	<b>46.8</b>	<b>195</b>	46.4	197	
654.roms_s	192	16.1	975	16.4	961	<b>16.3</b>	<b>964</b>		384	13.0	1210	12.9	1220	<b>13.0</b>	<b>1210</b>	

**SPECspeed®2017\_fp\_base = 476**

**SPECspeed®2017\_fp\_peak = 495**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 476

SPECspeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Operating System Notes (Continued)

To disable THP for peak runs of 621.wrf\_s:

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

To enable THP only on request for peak runs of 654.roms\_s:

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-383"  
LD_LIBRARY_PATH = "/aocczn4/amd_speed_aocc400_znver4_A_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "384"
```

Environment variables set by runcpu during the 603.bwaves\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 619.lbm\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 621.wrf\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 628.pop2\_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 654.roms\_s peak run:

```
GOMP_CPU_AFFINITY = "0 192 1 193 2 194 3 195 4 196 5 197 6 198 7 199 8 200 9 201 10 202 11 203 12 204 13  
205 14 206 15 207 16 208 17 209 18 210 19 211 20 212 21 213 22 214 23 215 24 216 25 217 26 218 27 219  
28 220 29 221 30 222 31 223 32 224 33 225 34 226 35 227 36 228 37 229 38 230 39 231 40 232 41 233 42  
234 43 235 44 236 45 237 46 238 47 239 48 240 49 241 50 242 51 243 52 244 53 245 54 246 55 247 56 248  
57 249 58 250 59 251 60 252 61 253 62 254 63 255 64 256 65 257 66 258 67 259 68 260 69 261 70 262 71  
263 72 264 73 265 74 266 75 267 76 268 77 269 78 270 79 271 80 272 81 273 82 274 83 275 84 276 85 277  
86 278 87 279 88 280 89 281 90 282 91 283 92 284 93 285 94 286 95 287 96 288 97 289 98 290 99 291 100  
292 101 293 102 294 103 295 104 296 105 297 106 298 107 299 108 300 109 301 110 302 111 303 112 304  
113 305 114 306 115 307 116 308 117 309 118 310 119 311 120 312 121 313 122 314 123 315 124 316 125  
317 126 318 127 319 128 320 129 321 130 322 131 323 132 324 133 325 134 326 135 327 136 328 137 329  
138 330 139 331 140 332 141 333 142 334 143 335 144 336 145 337 146 338 147 339 148 340 149 341 150  
342 151 343 152 344 153 345 154 346 155 347 156 348 157 349 158 350 159 351 160 352 161 353 162 354  
163 355 164 356 165 357 166 358 167 359 168 360 169 361 170 362 171 363 172 364 173 365 174 366 175  
367 176 368 177 369 178 370 179 371 180 372 181 373 182 374 183 375 184 376 185 377 186 378 187 379  
188 380 189 381 190 382 191 383"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 476

SPECspeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:  
SR-IOV Support = Disabled  
SVM Mode = Disabled  
NUMA nodes per socket = NPS1  
Determinism Control = Manual  
Determinism Enable = Power  
Engine Boost = Aggressive  
TDP Control = Manual  
TDP = 400  
PPT Control = Manual  
PPT = 400  
BMC Configuration:  
Fan mode = Full speed mode

```
Sysinfo program /aocczn4/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Sep 19 13:37:11 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 476

SPECspeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
-----  
2. w  
 13:37:11 up 2:52, 2 users, load average: 71.43, 174.53, 194.77  
USER      TTY      FROM          LOGIN@     IDLE     JCPU     PCPU WHAT  
root      tty1      -           10:48    2:47m  1.20s  0.14s /bin/bash ./amd_speed_aocc400_znver4_A1.sh  
root      tty2      -           10:56    42:15  0.08s  0.08s -bash  
  
-----  
3. Username  
From environment variable $USER: root  
  
-----  
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 6190540  
max locked memory       (kbytes, -l) 2097152  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority       (-r) 0  
stack size              (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 6190540  
virtual memory           (kbytes, -v) unlimited  
file locks              (-x) unlimited  
  
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./speed.sh  
python3 ./run_amd_speed_aocc400_znver4_A1.py  
/bin/bash ./amd_speed_aocc400_znver4_A1.sh  
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed  
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.170/templogs/preenv.fpspeed.170.0.log --lognum 170.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /aocczn4  
  
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9684X 96-Core Processor  
vendor_id       : AuthenticAMD  
cpu family     : 25  
model          : 17  
stepping        : 2  
microcode       : 0xa101203  
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass  
TLB size        : 3584 4K pages  
cpu cores      : 96  
siblings        : 192  
2 physical ids (chips)  
384 processors (hardware threads)  
physical id 0: core ids 0-95
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 476

SPECspeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 384
On-line CPU(s) list: 0-383
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9684X 96-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 2
Core(s) per socket: 96
Socket(s): 2
Stepping: 2
Frequency boost: enabled
CPU max MHz: 3715.4290
CPU min MHz: 1500.0000
BogoMIPS: 5099.70
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
       constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
       pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
       popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
       abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
       perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
       invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bml
       avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
       xsaves xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
       avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
       svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
       pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
       umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
       avx512_vpocntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
AMD-V
Virtualization: AMD-V
L1d cache: 6 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 192 MiB (192 instances)
L3 cache: 2.3 GiB (24 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-95,192-287
NUMA node1 CPU(s): 96-191,288-383
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

**SPECspeed®2017\_fp\_base = 476**

**SPECspeed®2017\_fp\_peak = 495**

**CPU2017 License:** 9016

**Test Date:** Sep-2023

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jun-2023

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Nov-2022

## Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	96M	2.3G	16	Unified	3	98304	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0-95,192-287  
node 0 size: 773815 MB  
node 0 free: 769809 MB  
node 1 cpus: 96-191,288-383  
node 1 size: 773843 MB  
node 1 free: 772722 MB  
node distances:  
node 0 1  
0: 10 32  
1: 32 10

-----  
9. /proc/meminfo

MemTotal: 1584803164 kB

-----  
10. who -r  
run-level 3 Sep 19 10:46

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyrd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievfd issue-add-ssh-keys kexec-load lummask man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2
indirect	wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=bd4eeb48-8f2c-47c9-ae06-b7241b1d0eb7  
splash=silent

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

**SPECSpeed®2017\_fp\_base = 476**

**SPECSpeed®2017\_fp\_peak = 495**

**CPU2017 License:** 9016

**Test Date:** Sep-2023

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jun-2023

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Nov-2022

## Platform Notes (Continued)

```
mitigations=auto
quiet
security=apparmor
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 1.50 GHz and 2.55 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       0  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages    0  
vm.swappiness                  1  
vm.watermark_boost_factor     15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode          1
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           [always] defer defer+madvise madvise never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled   always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag               1  
max_ptes_none        511  
max_ptes_shared      256  
max_ptes_swap        64  
pages_to_scan        4096  
scan_sleep_millisecs 10000
```

```
-----  
19. OS release
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 476

SPECspeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

-----  
20. Disk information

SPEC is set to: /aoocznn4  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p4 xfs 2.0T 205G 1.8T 10% /

-----  
21. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.  
Product: RS720A-E12-RS12  
Product Family: Server  
Serial: 123456789012

-----  
22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 0902  
BIOS Date: 04/12/2023  
BIOS Revision: 9.2

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C++, C, Fortran | 607.cactusBSSN\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECSpeed®2017\_fp\_base = 476

SPECSpeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactubssn\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 476

SPECspeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Base Portability Flags (Continued)

644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-femap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-femap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-femap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECSpeed®2017\_fp\_base = 476

SPECSpeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-flang

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECspeed®2017\_fp\_base = 476

SPECspeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Sep-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

627.cam4\_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E12-RS12  
(2.55 GHz, AMD EPYC 9684X)

SPECSpeed®2017\_fp\_base = 476

SPECSpeed®2017\_fp\_peak = 495

CPU2017 License: 9016

Test Date: Sep-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jun-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

628.pop2\_s (continued):

```
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactubSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.4.html>  
<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.4.xml>  
<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-19 01:37:10-0400.

Report generated on 2023-10-11 12:30:00 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-10.