



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

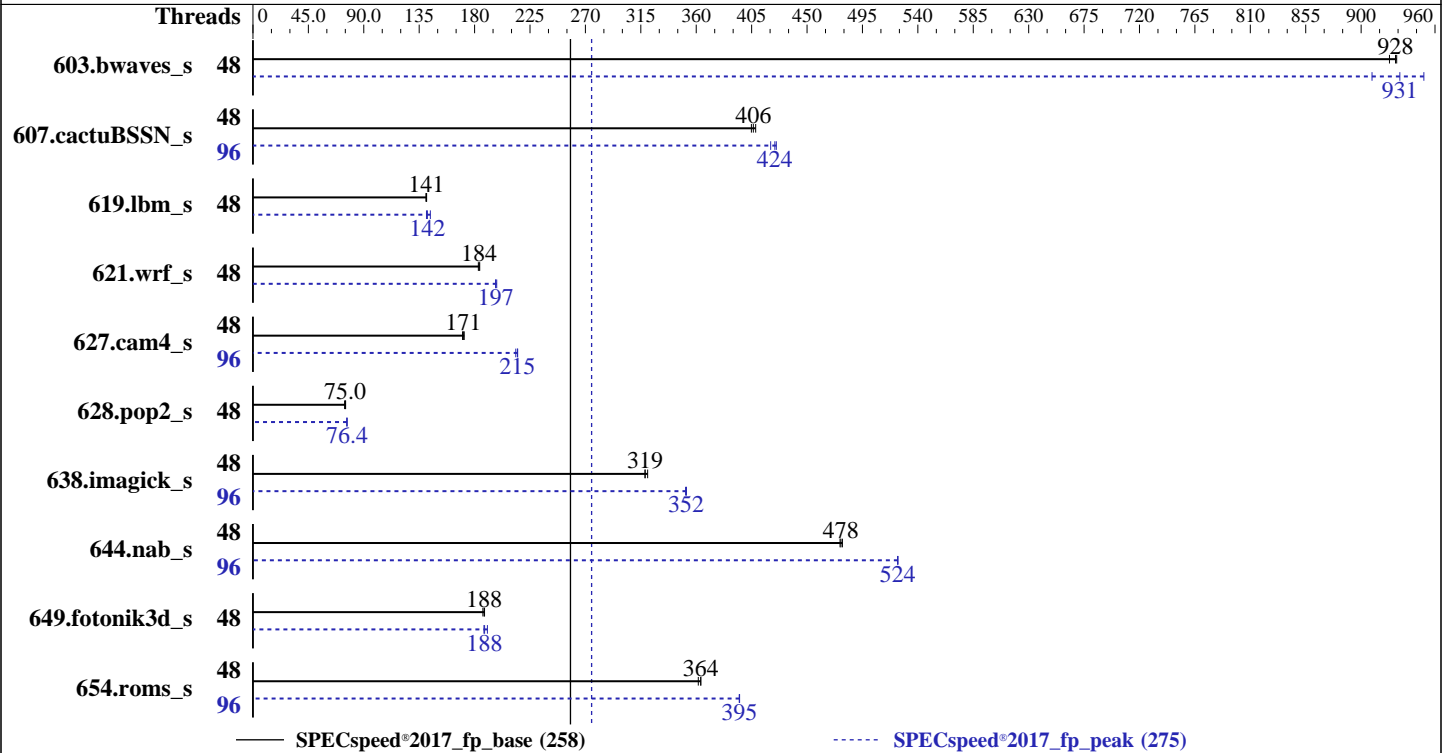

Hardware

CPU Name: AMD EPYC 9224
 Max MHz: 3700
 Nominal: 2500
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip,
 16 MB shared / 6 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version QGE115J 3.11 released Oct-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECSpeed®2017_fp_base = 258

SPECSpeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	63.9	923	63.5	929	63.6	928	48	63.3	931	62.0	951	64.9	909
607.cactuBSSN_s	48	40.8	408	41.2	405	41.0	406	96	39.3	424	39.2	425	39.6	420
619.lbm_s	48	37.1	141	37.3	140	37.2	141	48	36.4	144	37.0	142	37.2	141
621.wrf_s	48	72.3	183	71.8	184	72.0	184	48	67.1	197	67.1	197	66.8	198
627.cam4_s	48	51.7	172	51.9	171	52.1	170	96	41.2	215	41.3	215	41.5	213
628.pop2_s	48	158	75.3	158	75.0	160	74.4	48	155	76.4	156	76.3	155	76.4
638.imagick_s	48	45.0	321	45.3	319	45.3	318	96	41.0	352	41.1	351	41.0	352
644.nab_s	48	36.6	478	36.6	477	36.5	479	96	33.4	524	33.4	524	33.4	524
649.fotonik3d_s	48	48.6	188	48.8	187	48.5	188	48	47.9	190	48.6	188	48.5	188
654.roms_s	48	43.3	364	43.5	362	43.3	364	96	39.9	395	39.8	395	39.9	395

SPECSpeed®2017_fp_base = **258**

SPECSpeed®2017_fp_peak = **275**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Jul-2023
Software Availability: Nov-2022

Operating System Notes (Continued)

To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-95"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "96"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-47"
PGHPPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0 48 1 49 2 50 3 51 4 52 5 53 6 54 7 55 8 56 9 57 10 58 11 59 12 60 13 61 14 62 15 63
16 64 17 65 18 66 19 67 20 68 21 69 22 70 23 71 24 72 25 73 26 74 27 75 28 76 29 77 30 78 31 79 32 80
33 81 34 82 35 83 36 84 37 85 38 86 39 87 40 88 41 89 42 90 43 91 44 92 45 93 46 94 47 95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Jul-2023
Software Availability: Nov-2022

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Nov 30 11:38:44 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
11:38:44 up 2 min, 1 user, load average: 0.19, 0.09, 0.03
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 29Apr22 20.00s 1.18s 0.09s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Jul-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 3094031
max locked memory      (kbytes, -l) 2097152
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 3094031
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.119/templogs/preenv.fpspeed.119.0.log --lognum 119.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9224 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa10113b
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 1: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-11,16-27,32-43,48-59
physical id 1: apicids 64-75,80-91,96-107,112-123
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):      32-bit, 64-bit
Address sizes:       52 bits physical, 57 bits virtual
Byte Order:          Little Endian
CPU(s):              96
On-line CPU(s) list: 0-95
Vendor ID:           AuthenticAMD
Model name:          AMD EPYC 9224 24-Core Processor
CPU family:          25
Model:               17
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s):           2
Stepping:            1
Frequency boost:     enabled
CPU max MHz:         3706.0540
CPU min MHz:         1500.0000
BogoMIPS:            4992.81
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                    constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                    pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                    popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                    abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                    perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                    invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                    avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                    svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                    pausefilter pfthreshold avic v_omsave_vmload vgif v_spec_ctrl avx512vbmi
                    umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld

Virtualization:      AMD-V
L1d cache:           1.5 MiB (48 instances)
L1i cache:           1.5 MiB (48 instances)
L2 cache:            48 MiB (48 instances)
L3 cache:            128 MiB (8 instances)
NUMA node(s):        2
NUMA node0 CPU(s):  0-23,48-71
NUMA node1 CPU(s):  24-47,72-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:  Not affected
Vulnerability Mds:   Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                    filling
Vulnerability Srbds:  Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Jul-2023
Software Availability: Nov-2022

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 386717 MB
node 0 free: 384973 MB
node 1 cpus: 24-47,72-95
node 1 size: 386814 MB
node 1 free: 385567 MB
node distances:
node  0  1
  0:  10  32
  1:  32  10
```

9. /proc/meminfo

```
MemTotal: 792096636 kB
```

10. who -r

```
run-level 3 Apr 29 20:00
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix
purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init
iscsid iscsiui issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create
multipathd nfs nfs-blkmap nmb ntp-wait ntpd nvme-autoconnect rdisc rpcbind rpmconfigcheck
rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd svnservice
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2
indirect wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=8e96e494-2560-4de0-bb42-3bec8759368b
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.50 GHz.
The governor "performance" may decide which speed to use
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

within this range.

boost state support:

Supported: yes

Active: yes

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs   893G  27G  867G   3% /

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR675 V3 System Board
Product Family: ThinkSystem

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Jul-2023
Software Availability: Nov-2022

Platform Notes (Continued)

Serial: None

21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
8x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
12x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: QGE115J-3.11
BIOS Date: 10/16/2023
BIOS Revision: 3.11
Firmware Revision: 3.10

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Compiler Version Notes (Continued)

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

```

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Base Other Flags

C benchmarks:

`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:

`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:

`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:

`-Wno-return-type -Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:

`clang`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000`

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Date: Nov-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

619.lbm_s (continued):

```
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP  
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3  
-fvector-transform -fscalar-transform -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP  
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fopenmp -flto -Mrecursive  
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang
```

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.50 GHz, AMD EPYC 9224)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = 275

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-29 22:38:43-0500.

Report generated on 2023-12-20 13:11:41 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-20.