



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

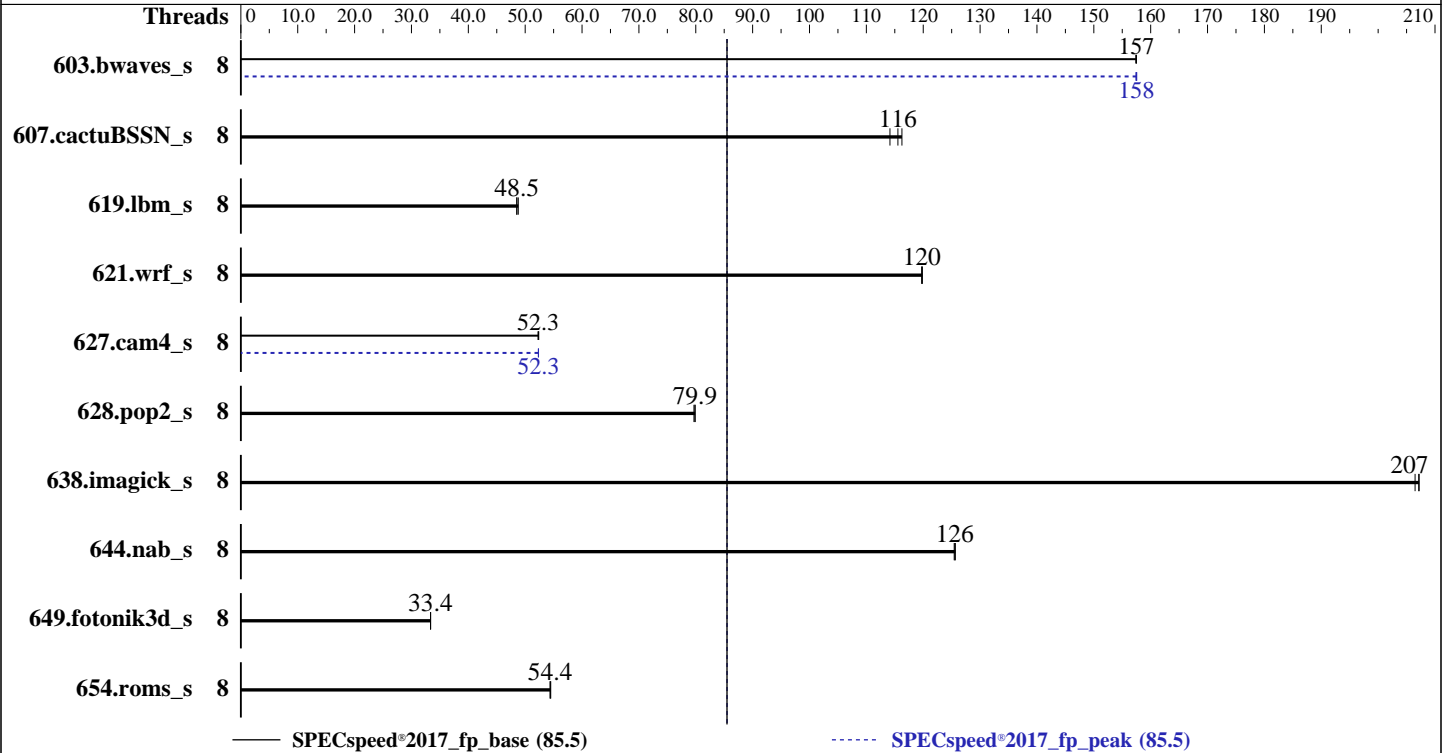

### Hardware

CPU Name: Intel Xeon E-2488  
 Max MHz: 5600  
 Nominal: 3200  
 Enabled: 8 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 24 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)  
 Storage: 480 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.3 (Plow)  
 Kernel 5.14.0-362.8.1.el9\_3.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version CTE101X 1.10 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECSpeed®2017\_fp\_base = 85.5

SPECSpeed®2017\_fp\_peak = 85.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2023  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	8	<b>375</b>	<b>157</b>	375	157	375	157	8	375	158	375	157	<b>375</b>	<b>158</b>
607.cactuBSSN_s	8	143	116	146	114	<b>144</b>	<b>116</b>	8	143	116	146	114	<b>144</b>	<b>116</b>
619.lbm_s	8	108	48.5	<b>108</b>	<b>48.5</b>	107	48.8	8	108	48.5	<b>108</b>	<b>48.5</b>	107	48.8
621.wrf_s	8	110	120	110	120	<b>110</b>	<b>120</b>	8	110	120	110	120	<b>110</b>	<b>120</b>
627.cam4_s	8	169	52.4	170	52.3	<b>169</b>	<b>52.3</b>	8	169	52.3	<b>169</b>	<b>52.3</b>	169	52.3
628.pop2_s	8	149	79.7	<b>149</b>	<b>79.9</b>	149	79.9	8	149	79.7	<b>149</b>	<b>79.9</b>	149	79.9
638.imagick_s	8	<b>69.6</b>	<b>207</b>	69.9	206	69.6	207	8	<b>69.6</b>	<b>207</b>	69.9	206	69.6	207
644.nab_s	8	139	125	139	126	<b>139</b>	<b>126</b>	8	139	125	139	126	<b>139</b>	<b>126</b>
649.fotonik3d_s	8	<b>273</b>	<b>33.4</b>	273	33.4	273	33.4	8	<b>273</b>	<b>33.4</b>	273	33.4	273	33.4
654.roms_s	8	289	54.5	<b>289</b>	<b>54.4</b>	289	54.4	8	289	54.5	<b>289</b>	<b>54.4</b>	289	54.4

SPECSpeed®2017\_fp\_base = **85.5**

SPECSpeed®2017\_fp\_peak = **85.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2023

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

Hyper-Threading set to Disabled

Turbo Limit for 95W CPU set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Dec 25 18:32:59 2023
```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.e19)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-362.8.1.el9_3.x86_64 #1 SMP PREEMPT_DYNAMIC Tue Oct 3 11:12:36 EDT 2023
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
18:32:59 up 35 min, 1 user, load average: 0.67, 4.84, 5.83
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root     tty1      17:59   11.00s  0.57s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

### Platform Notes (Continued)

```

scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 256658
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 256658
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx2-speed-20231121.cfg --define cores=8 --tune base,peak -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx2-speed-20231121.cfg --define cores=8 --tune base,peak --output_format all --define
  drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.031/temlogs/preenv.fpspeed.031.0.log --lognum 031.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) E E-2488
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping      : 1
microcode     : 0x11f
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 8
siblings      : 8
1 physical ids (chips)
8 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0,2,4,6,8,10,12,14
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     42 bits physical, 48 bits virtual
Byte Order:        Little Endian
CPU(s):            8
On-line CPU(s) list: 0-7
Vendor ID:         GenuineIntel

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2023  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) E E-2488
BIOS Model name: Intel(R) Xeon(R) E E-2488
CPU family: 6
Model: 183
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 1
Stepping: 1
BogoMIPS: 6374.40
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp
ibrs_enhanced tpr_shadow flexpriority ept vpid ad_fsgsbase
tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
avx_vnni dtherm ida arat pln pts hfi vnmi umip pku ospke waitpkg gfni
vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize
pconfig arch_lbr ibt flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 384 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 16 MiB (8 instances)
L3 cache: 24 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-7
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
PBRSE-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	2M	16M	16	Unified	2	2048	1	64
L3	24M	24M	12	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-7
node 0 size: 64207 MB
node 0 free: 62493 MB
node distances:
node 0

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2023  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

0: 10

9. /proc/meminfo

MemTotal: 65748236 kB

10. who -r

run-level 3 Dec 25 17:57

11. Systemd service manager version: systemd 252 (252-18.el9)

Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* dnf-makecache.service	loaded	failed	failed	dnf makecache

13. Services, from systemctl list-unit-files

STATE	UNIT	FILES
enabled	NetworkManager	NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs	
disabled	arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell dnf-system-upgrade iprdump iprinit iprupdate iscsid iscsiuiio kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvme-fc-autoconnect pesign psacct rdisc rhcd rhsm rhsm-facts rpmbd-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext	
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot	

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.8.1.el9\_3.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet

15. cpupower frequency-info

analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

16. tuned-adm active

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2023  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

Current active profile: throughput-performance

```

-----
17. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.3 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.3 (Plow)
system-release  Red Hat Enterprise Linux release 9.3 (Plow)

-----
21. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  344G  14G  331G   5% /home

-----
22. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR250 V3
Product Family: ThinkSystem
Serial:          1234567890

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2023  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

-----  
23. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x Samsung M324R4GA3BB0-CQKOD 32 GB 2 rank 4800, configured at 4400  
1x Samsung M324R4GA3BB0-CQKOL 32 GB 2 rank 4800, configured at 4400

-----  
24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: CTE101X-1.10  
BIOS Date: 12/20/2023  
BIOS Revision: 1.10  
Firmware Revision: 1.10

### Compiler Version Notes

-----  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

-----  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

-----  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

-----  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2023

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(3.20 GHz, Intel Xeon E-2488)

SPECspeed®2017\_fp\_base = 85.5

SPECspeed®2017\_fp\_peak = 85.5

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-25 05:32:58-0500.

Report generated on 2024-02-16 12:41:57 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-16.