



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECSpeed®2017\_fp\_base = 322**

**SPECSpeed®2017\_fp\_peak = 322**

CPU2017 License: 006042


**Test Date:** Jan-2024

**Test Sponsor:** Netweb Pte Ltd

**Hardware Availability:** Jan-2023

**Tested by:** Tyrone Systems

**Software Availability:** Nov-2023

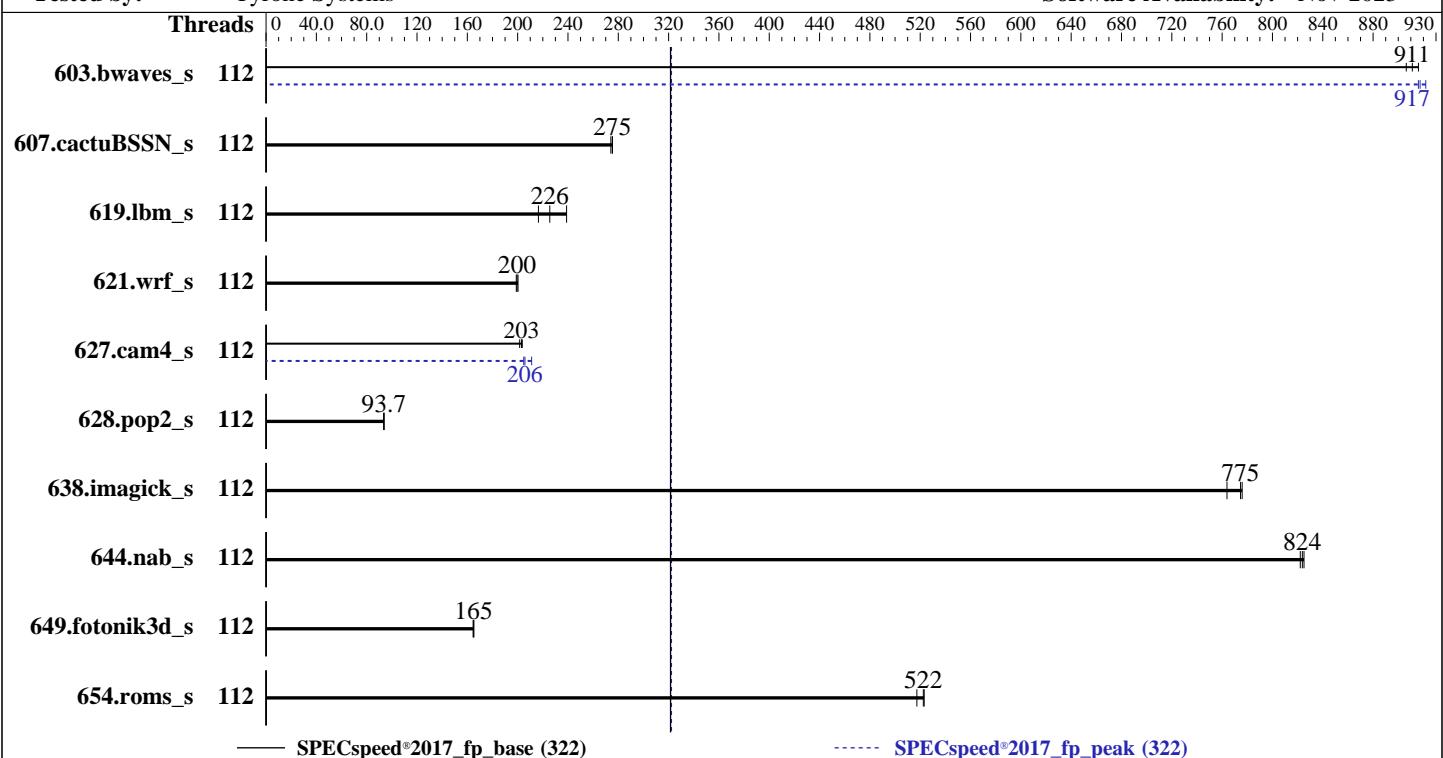

— SPECSpeed®2017\_fp\_base (322)

----- SPECSpeed®2017\_fp\_peak (322)

## Hardware

CPU Name: Intel Xeon Platinum 8480+  
Max MHz: 3800  
Nominal: 2000  
Enabled: 112 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 105 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 960 GB NVMe  
Other: None

## OS:

Red Hat Enterprise Linux 9.3 (Plow)  
5.14.0-362.13.1.el9\_3.x86\_64

## Compiler:

C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;

## Parallel:

Yes

## Firmware:

Version 1.3 released Jun-2023

## File System:

xfs

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

64-bit

## Other:

jemalloc memory allocator V5.0.1

## Power Management:

BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECSpeed®2017\_fp\_base = 322**

**SPECSpeed®2017\_fp\_peak = 322**

CPU2017 License: 006042

Test Date: Jan-2024

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: Nov-2023

## Results Table

Benchmark	Base							Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Threads	
603.bwaves_s	112	65.1	906	<b>64.7</b>	<b>911</b>	112	64.4	916	<b>64.3</b>	<b>917</b>	112	64.0	922	<b>64.4</b>	916
607.cactuBSSN_s	112	60.8	274	<b>60.6</b>	<b>275</b>	112	60.5	275	<b>60.8</b>	<b>274</b>	112	<b>60.6</b>	<b>275</b>	<b>60.5</b>	275
619.lbm_s	112	21.9	239	<b>23.2</b>	<b>226</b>	112	24.2	217	<b>21.9</b>	<b>239</b>	112	<b>23.2</b>	<b>226</b>	<b>24.2</b>	217
621.wrf_s	112	66.0	200	<b>66.3</b>	<b>200</b>	112	66.5	199	<b>66.0</b>	<b>200</b>	112	<b>66.3</b>	<b>200</b>	<b>66.5</b>	199
627.cam4_s	112	<b>43.7</b>	<b>203</b>	44.0	202	112	43.5	204	<b>43.1</b>	<b>206</b>	112	43.3	205	<b>42.0</b>	211
628.pop2_s	112	127	93.8	127	93.6	<b>127</b>	<b>93.7</b>	112	127	93.8	127	93.6	<b>127</b>	<b>93.7</b>	
638.imagick_s	112	<b>18.6</b>	<b>775</b>	18.9	764	112	18.6	776	<b>18.6</b>	<b>775</b>	112	18.9	764	<b>18.6</b>	776
644.nab_s	112	<b>21.2</b>	<b>824</b>	21.3	822	112	21.2	825	<b>21.2</b>	<b>824</b>	112	21.3	822	<b>21.2</b>	825
649.fotonik3d_s	112	<b>55.2</b>	<b>165</b>	55.4	165	112	55.2	165	<b>55.2</b>	<b>165</b>	112	55.4	165	<b>55.2</b>	165
654.roms_s	112	30.1	523	<b>30.1</b>	<b>522</b>	112	30.4	517	112	30.1	523	<b>30.1</b>	<b>522</b>	30.4	517
SPECSpeed®2017_fp_base = <b>322</b>															
SPECSpeed®2017_fp_peak = <b>322</b>															

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECspeed®2017\_fp\_base = 322**

**SPECspeed®2017\_fp\_peak = 322**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## General Notes (Continued)

system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:  
Power Technology = Custom  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
KTI Prefetch = Enable  
LLC Dead Line Alloc = Disable  
Hyper-Threading = Enabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu Jan 11 15:24:00 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 252 (252-18.el9)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

1. uname -a  
Linux localhost.localdomain 5.14.0-362.13.1.el9\_3.x86\_64 #1 SMP PREEMPT\_DYNAMIC Fri Nov 24 01:57:57 EST  
2023 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
15:24:00 up 23:48, 2 users, load average: 6.76, 7.55, 4.48  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 Wed15 3:21m 1.03s 0.00s -bash  
root tty2 Wed15 23:42m 0.00s 0.00s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECSpeed®2017\_fp\_base = 322

SPECSpeed®2017\_fp\_peak = 322

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

3. Username  
From environment variable \$USER: root

4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (i) 4126556  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4126556  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=112 --tune base,peak -o all --define  
smt-on --define drop\_caches fspseed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=112 --tune base,peak --output\_format all  
--define smt-on --define drop\_caches --nopower --runmode speed --tune base:peak --size refspeed fspseed  
--nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.004/templogs/preenv.fspseed.004.0.log --lognum 004.0  
--from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8480+  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b0004d0  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs eibrss\_pbrss  
cpu cores : 56  
siblings : 112  
2 physical ids (chips)  
224 processors (hardware threads)  
physical id 0: core ids 0-55  
physical id 1: core ids 0-55  
physical id 0: apicids 0-111  
physical id 1: apicids 128-239

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECspeed®2017\_fp\_base = 322**

**SPECspeed®2017\_fp\_peak = 322**

CPU2017 License: 006042

Test Date: Jan-2024

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: Nov-2023

## Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 224
On-line CPU(s) list: 0-223
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8480+
BIOS Model name: Intel(R) Xeon(R) Platinum 8480+
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 56
Socket(s): 2
Stepping: 8
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
       rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
       xtopology nonstop_tsc cpuid aperf mperf tsc_known_freq pnpi pcimulqdg
       dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid
       dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
       flt6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12
       cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp
       ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
       rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
       intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
       xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
       split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
       avx512vbmi umip pku ospte waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
       avx512_vnni avx512_bitlg tme avx512_vpocntdq la57 rdpid
       bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
       serialize tsxlptrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
       amx_int8 flush_lld arch_capabilities
L1d cache: 5.3 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 224 MiB (112 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-27,112-139
NUMA node1 CPU(s): 28-55,140-167
NUMA node2 CPU(s): 56-83,168-195
NUMA node3 CPU(s): 84-111,196-223
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECSpeed®2017\_fp\_base = 322**

**SPECSpeed®2017\_fp\_peak = 322**

CPU2017 License: 006042

Test Date: Jan-2024

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: Nov-2023

## Platform Notes (Continued)

Vulnerability Spec store bypass:

Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-27,112-139

node 0 size: 257671 MB

node 0 free: 218783 MB

node 1 cpus: 28-55,140-167

node 1 size: 258034 MB

node 1 free: 228984 MB

node 2 cpus: 56-83,168-195

node 2 size: 258034 MB

node 2 free: 226857 MB

node 3 cpus: 84-111,196-223

node 3 size: 257965 MB

node 3 free: 222946 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

-----  
9. /proc/meminfo

MemTotal: 1056465900 kB

-----  
10. who -r

run-level 3 Jan 10 15:36

-----  
11. Systemd service manager version: systemd 252 (252-18.el9)

Default Target Status

multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECspeed®2017\_fp\_base = 322**

**SPECspeed®2017\_fp\_peak = 322**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Platform Notes (Continued)

```

enabled-runtime    systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmtoolsd
disabled         systemd-remount-fs
arp-ethers        autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon      debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server
gssproxy          httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuiio kpatch
kvm-stat          ledmon libvirt-guests libvирtd lldpad man-db-restart-cache-update named
named-chroot     netavark-dhcp-proxy nfs-blkmap nfs-server nftables nmb numad nvmf-autoconnect
ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman
podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop
psacct           ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd
selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin
speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures
systemd-nspawn@   systemd-pstore systemd-sysext target targetclid tog-pegasus trace-cmd
virtinterfaced   virtnetworkd virtnodeved devd virtnwfilterd virtproxyd virtsecretd virtstoraged
vsftpd           wpa_supplicant
indirect         pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-ssh sssd-sudo
                   systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd vsftpd@
```

---

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.13.1.el9_3.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

---

14. cpupower frequency-info

```

analyzing CPU 0:
    current policy: frequency should be within 3.80 GHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes
```

---

15. tuned-adm active

```

Current active profile: throughput-performance
```

---

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECspeed®2017\_fp\_base = 322**

**SPECspeed®2017\_fp\_peak = 322**

CPU2017 License: 006042

**Test Date:** Jan-2024

Test Sponsor: Netweb Pte Ltd

**Hardware Availability:** Jan-2023

Tested by: Tyrone Systems

**Software Availability:** Nov-2023

## Platform Notes (Continued)

```
vm.nr_overcommit_hugepages      0
vm.swappiness                   10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
    defrag      always defer defer+madvise [madvise] never  
    enabled     [always] madvise never  
    hpage_pmd_size 2097152  
    shmem_enabled always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs   60000  
    defrag                  1  
    max_ptes_none          511  
    max_ptes_shared         256  
    max_ptes_swap           64  
    pages_to_scan           4096  
    scan_sleep_millisecs   10000
```

```
-----  
19. OS release  
    From /etc/*-release /etc/*-version  
    os-release      Red Hat Enterprise Linux 9.3 (Plow)  
    redhat-release  Red Hat Enterprise Linux release 9.3 (Plow)  
    system-release  Red Hat Linux release 9.3 (Plow)
```

```
-----  
20. Disk information  
    SPEC is set to: /home/cpu2017  
    Filesystem      Type  Size  Used Avail Use% Mounted on  
    /dev/mapper/rhel-home xfs   856G  250G  607G  30% /home
```

```
-----  
21. /sys/devices/virtual/dmi/id  
    Vendor:        Tyrone Systems  
    Product:       Tyrone Camarero SDI200A3N-212  
    Product Family: Family  
    Serial:        2X21292023D
```

```
-----  
22. dmidecode  
    Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.  
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
    "DMTF SMBIOS" standard.  
    Memory:  
        16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800
```

```
-----  
23. BIOS  
    (This section combines info from /sys/devices and dmidecode.)  
    BIOS Vendor:      American Megatrends International, LLC.  
    BIOS Version:     1.3  
    BIOS Date:        06/01/2023  
    BIOS Revision:    5.31
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECspeed®2017\_fp\_base = 322**

**SPECspeed®2017\_fp\_peak = 322**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactubssn\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECspeed®2017\_fp\_base = 322**

**SPECspeed®2017\_fp\_peak = 322**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

**SPECSPEED®2017\_fp\_base = 322**

**SPECSPEED®2017\_fp\_peak = 322**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jan-2023

**Software Availability:** Nov-2023

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212  
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECSpeed®2017\_fp\_base = 322

SPECSpeed®2017\_fp\_peak = 322

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Peak Optimization Flags (Continued)

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-11 04:54:00-0500.

Report generated on 2024-02-07 17:02:03 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-07.