



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECSpeed®2017_fp_base = 224

SPECSpeed®2017_fp_peak = 224

CPU2017 License: 006042


Test Date: Jan-2024

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: Dec-2023

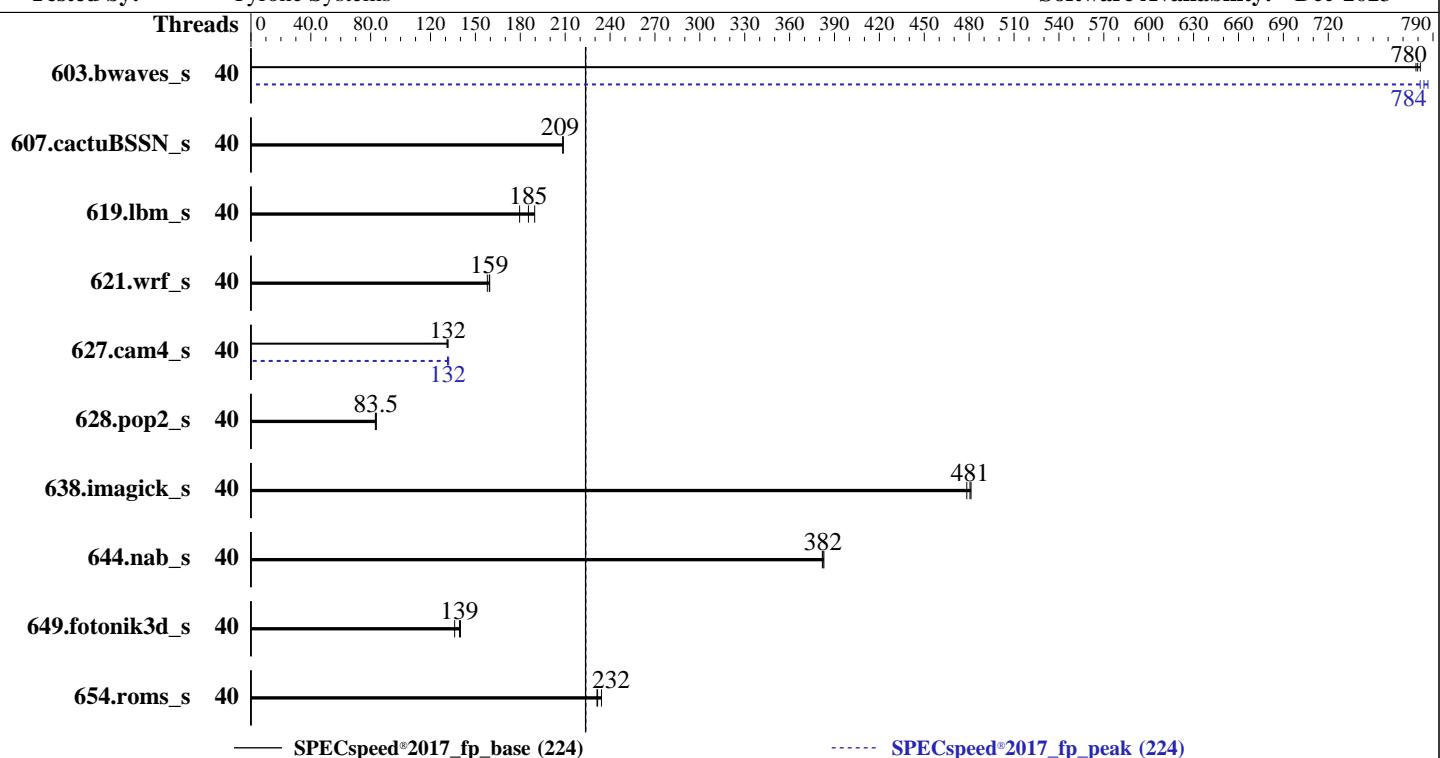

Hardware

CPU Name: Intel Xeon Silver 4416+
Max MHz: 3900
Nominal: 2000
Enabled: 40 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 37.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)
Storage: 1 x 960 GB NVMe
Other: None

Software

OS: Red Hat Enterprise Linux 9.3 (Plow)
Compiler: 5.14.0-362.13.1.el9_3.x86_64
C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 1.3 released Jun-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECSpeed®2017_fp_base = 224

SPECSpeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Date: Jan-2024

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	40	75.7	780	75.8	779	75.5	782	40	75.5	781	75.0	787	75.3	784
607.cactuBSSN_s	40	79.9	209	80.0	208	79.9	209	40	79.9	209	80.0	208	79.9	209
619.lbm_s	40	27.6	190	28.2	185	29.2	180	40	27.6	190	28.2	185	29.2	180
621.wrf_s	40	83.7	158	82.9	160	83.0	159	40	83.7	158	82.9	160	83.0	159
627.cam4_s	40	67.4	132	67.3	132	67.6	131	40	67.5	131	67.1	132	67.3	132
628.pop2_s	40	142	83.5	143	83.1	142	83.8	40	142	83.5	143	83.1	142	83.8
638.imagick_s	40	30.0	481	30.2	478	30.0	481	40	30.0	481	30.2	478	30.0	481
644.nab_s	40	45.6	383	45.8	382	45.7	382	40	45.6	383	45.8	382	45.7	382
649.fotonik3d_s	40	65.4	139	67.0	136	65.1	140	40	65.4	139	67.0	136	65.1	140
654.roms_s	40	67.2	234	68.1	231	68.0	232	40	67.2	234	68.1	231	68.0	232
SPECSpeed®2017_fp_base = 224							SPECSpeed®2017_fp_peak = 224							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECspeed®2017_fp_base = 224

SPECspeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

General Notes (Continued)

system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

ENERGY_PERF_BIAS_CFG mode = Maximum Performance

KTI Prefetch = Enable

LLC Dead Line Alloc = Disable

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Jan 22 13:34:38 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 252 (252-18.el9)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-362.13.1.el9_3.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Nov 24 01:57:57 EST
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:34:38 up 2 days, 2:16, 2 users, load average: 6.56, 6.70, 3.96
USER     TTY      LOGIN@    IDLE    JCPU    PCPU WHAT
root     tty1      Sat12   3:27m  0.88s  0.00s -bash
root     tty2      Sat17   43:33m  0.44s  0.44s -bash
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECSpeed®2017_fp_base = 224

SPECSpeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4126736
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4126736
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=40 --tune base,peak -o all --define smt-on
  --define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=40 --tune base,peak --output_format all
  --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
  --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Silver 4416+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping         : 8
microcode        : 0x2b0004d0
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brsb
cpu cores        : 20
siblings          : 40
2 physical ids (chips)
80 processors (hardware threads)
physical id 0: core ids 0-19
physical id 1: core ids 0-19
physical id 0: apicids 0-39
physical id 1: apicids 128-167
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECspeed®2017_fp_base = 224

SPECspeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 80
On-line CPU(s) list: 0-79
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Silver 4416+
BIOS Model name: Intel(R) Xeon(R) Silver 4416+
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 2
Stepping: 8
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
       rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
       xtopology nonstop_tsc cpuid aperfmpf tsc_known_freq pni pclmulqdq
       dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid
       dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
       f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12
       cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp
       ibrs_enhanced fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqmq
       rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
       intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
       xsaves cqmq_llc cqmq_occur_llc cqmq_mbm_total cqmq_mbm_local
       split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
       avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfn1 vaes vpclmulqdq
       avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
       bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear
       serialize tsxlptrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
       amx_int8 flush_lld arch_capabilities
L1d cache: 1.9 MiB (40 instances)
L1i cache: 1.3 MiB (40 instances)
L2 cache: 80 MiB (40 instances)
L3 cache: 75 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-9,40-49
NUMA node1 CPU(s): 10-19,50-59
NUMA node2 CPU(s): 20-29,60-69
NUMA node3 CPU(s): 30-39,70-79
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Llftf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECspeed®2017_fp_base = 224

SPECspeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Date: Jan-2024

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Spectre v2:

Mitigation: Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.9M	12	Data	1	64	1	64
L1i	32K	1.3M	8	Instruction	1	64	1	64
L2	2M	80M	16	Unified	2	2048	1	64
L3	37.5M	75M	15	Unified	3	40960	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-9,40-49

node 0 size: 257680 MB

node 0 free: 241180 MB

node 1 cpus: 10-19,50-59

node 1 size: 258042 MB

node 1 free: 240029 MB

node 2 cpus: 20-29,60-69

node 2 size: 258042 MB

node 2 free: 245336 MB

node 3 cpus: 30-39,70-79

node 3 size: 257983 MB

node 3 free: 245152 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1056511908 kB

10. who -r

run-level 3 Jan 20 11:18

11. Systemd service manager version: systemd 252 (252-18.el9)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgautils vmtoolsd
enabled-runtime	systemd-remount-fs

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECspeed®2017_fp_base = 224

SPECspeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Platform Notes (Continued)

disabled arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq dovecot fancontrol fcoe grafana-server gssproxy httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuiio kpatch kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot netavark-dhcp-proxy nfs-blkmap nfs-server nftables nmb numad nvme-autoconnect ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant

indirect pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot virtlockd vsftpd@

13. Linux kernel boot-time arguments, from /proc/cmdline
 BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.13.1.el9_3.x86_64
 root=/dev/mapper/rhel-root
 ro
 resume=/dev/mapper/rhel-swap
 rd.lvm.lv=rhel/root
 rd.lvm.lv=rhel/swap
 rhgb
 quiet

14. cpupower frequency-info
analyzing CPU 0:
 current policy: frequency should be within 3.90 GHz and 3.90 GHz.
 The governor "performance" may decide which speed to use
 within this range.
 boost state support:
 Supported: yes
 Active: yes

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
 kernel.numa_balancing 1
 kernel.randomize_va_space 2
 vm.compaction_proactiveness 20
 vm.dirty_background_bytes 0
 vm.dirty_background_ratio 10
 vm.dirty_bytes 0
 vm.dirty_expire_centisecs 3000
 vm.dirty_ratio 40
 vm.dirty_writeback_centisecs 500
 vm.dirtytime_expire_seconds 43200
 vm.extfrag_threshold 500
 vm.min_unmapped_ratio 1
 vm.nr_hugepages 0
 vm.nr_hugepages_mempolicy 0
 vm.nr_overcommit_hugepages 0
 vm.swappiness 10

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECSpeed®2017_fp_base = 224

SPECSpeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Date: Jan-2024

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: Dec-2023

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          0

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          [always] madvise never
    hpage_pmd_size   2097152
    shmem_enabled    always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.3 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.3 (Plow)
    system-release  Red Hat Enterprise Linux release 9.3 (Plow)

-----
20. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem           Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   856G  262G  595G  31%  /home

-----
21. /sys/devices/virtual/dmi/id
    Vendor:        Tyrone Systems
    Product:       Tyrone Camarero SDI200A3N-212
    Product Family: Family
    Serial:        2X21292023D

-----
22. dmidecode
    Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800, configured at 4000

-----
23. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      American Megatrends International, LLC.
    BIOS Version:     1.3
    BIOS Date:        06/01/2023
    BIOS Revision:    5.31
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECspeed®2017_fp_base = 224

SPECspeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactubSSN_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECspeed®2017_fp_base = 224

SPECspeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECSPEED®2017_fp_base = 224

SPECSPEED®2017_fp_peak = 224

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jan-2023

Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI200A3N-212
(2.00 GHz, Intel Xeon Silver 4416+)

SPECSpeed®2017_fp_base = 224

SPECSpeed®2017_fp_peak = 224

CPU2017 License: 006042

Test Date: Jan-2024

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Jan-2023

Tested by: Tyrone Systems

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-22 03:04:37-0500.

Report generated on 2024-03-07 11:11:20 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-07.